



安装方式
INSTALLATION

隧道轴流风机常见的安装方式有两种：卧式安装和立式安装
There are two common installation methods of tunnel axial fan: horizontal installation and vertical installation

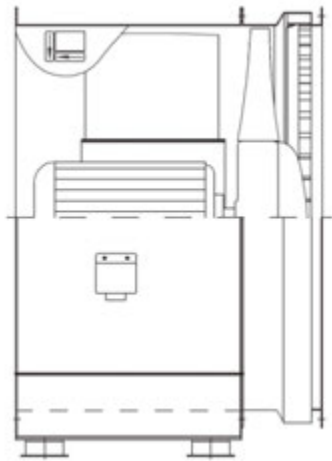


卧式安装示意图
Horizontal installation

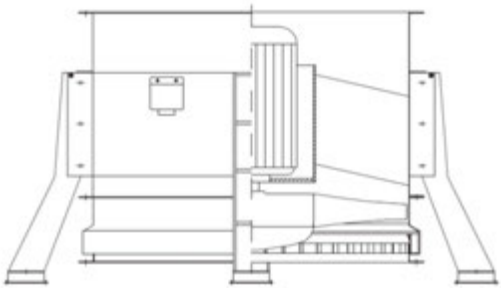

立式安装示意图
Vertical installation


型号释义
INTERPRETATION MODEL

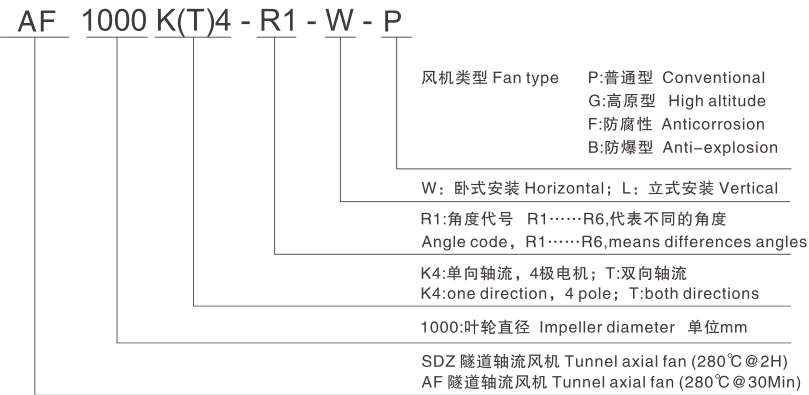

技术参数
TECHNICAL PARAMETERS

型号 1250K4

叶轮直径 Wheel Diameter: 1250mm  
叶轮形式 Wheel type: 轴流 Axial  
最大转速 Max RPM: 1450RPM  
最大风量 Max Volume: 150000m³/h  
最大全压 Max T.P.:1400Pa  
重量Weight: 330Kg

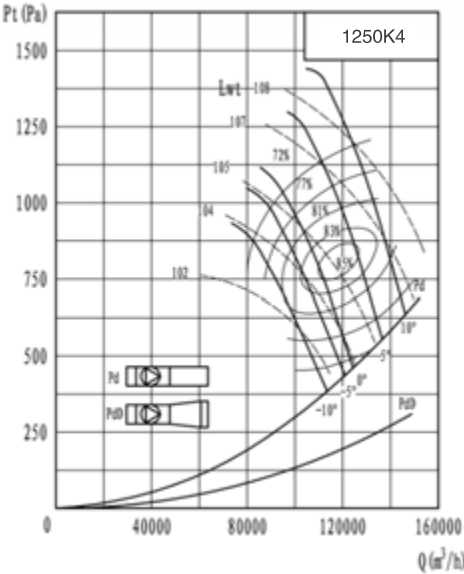

|            |     |     |     |     |      |      |      |      |
|------------|-----|-----|-----|-----|------|------|------|------|
| 频率 ( Hz )  | 63  | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 |
| 自由空间 ( dB) | -15 | -9  | -5  | -6  | -8   | -13  | -21  | -26  |
| 管道内(dB)    | -15 | -8  | -5  | -6  | -8   | -13  | -21  | -26  |

| 型号规格<br>Model | 安装角<br>Angle | 风量<br>(m³/h) | 全压<br>(Pa) | 电机功率<br>(KW) | 转速<br>( r/min ) | 声功率级<br>d(B) |
|---------------|--------------|--------------|------------|--------------|-----------------|--------------|
| 1250K4        | R1           | 103539       | 561        | 37           | 1480            | 101          |
|               |              | 98927        | 641        |              |                 | 102          |
|               |              | 93873        | 724        |              |                 | 102          |
|               |              | 89167        | 790        |              |                 | 103          |
|               |              | 85377        | 842        |              |                 | 103          |
|               | R2           | 110148       | 645        | 45           | 1480            | 102          |
|               |              | 105241       | 737        |              |                 | 103          |
|               |              | 99865        | 832        |              |                 | 104          |
|               |              | 94858        | 908        |              |                 | 104          |
|               |              | 90827        | 968        |              |                 | 105          |
|               | R3           | 115000       | 684        | 55           | 1480            | 103          |
|               |              | 110064       | 791        |              |                 | 104          |
|               |              | 105050       | 882        |              |                 | 105          |
|               |              | 100421       | 956        |              |                 | 105          |
|               |              | 94998        | 1033       |              |                 | 105          |
|               | R4           | 126500       | 821        | 75           | 1480            | 105          |
|               |              | 121070       | 949        |              |                 | 106          |
|               |              | 115555       | 1058       |              |                 | 107          |
|               |              | 110463       | 1147       |              |                 | 107          |
|               |              | 104500       | 1240       |              |                 | 107          |
|               | R5           | 135700       | 930        | 90           | 1480            | 106          |
|               |              | 129876       | 1076       |              |                 | 107          |
|               |              | 123959       | 1200       |              |                 | 108          |
|               |              | 118497       | 1300       |              |                 | 108          |
|               |              | 112100       | 1405       |              |                 | 109          |

型号 1400K4

叶轮直径 **Wheel Diameter:** 1400mm


叶轮形式 **Wheel type:** 轴流 Axial

最大转速 **Max RPM:** 1450RPM

最大风量**Max Volume:** 200000m³/h

最大全压 **Max T.P. :**1600Pa

重量**Weight:** 460Kg

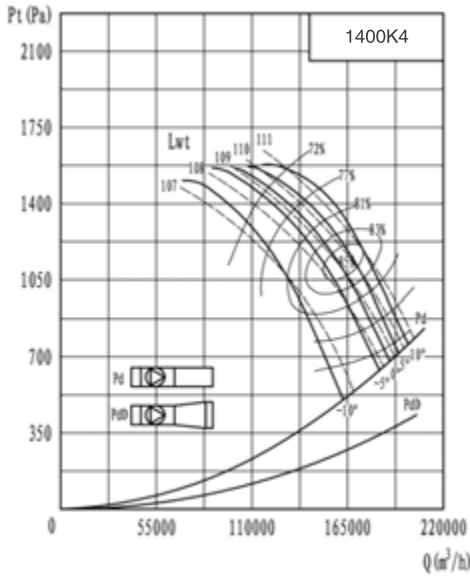

|          |     |     |     |     |      |      |      |      |
|----------|-----|-----|-----|-----|------|------|------|------|
| 频率（Hz）   | 63  | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 |
| 自由空间（dB） | -15 | -9  | -5  | -6  | -8   | -13  | -21  | -26  |
| 管道内(dB)  | -13 | -8  | -5  | -6  | -8   | -13  | -21  | -26  |

| 型号规格<br>Model | 安装角<br>Angle | 风量<br>(m³/h) | 全压<br>(Pa) | 电机功率<br>(KW) | 转速<br>( r/min ) | 声功率级<br>d(B) |
|---------------|--------------|--------------|------------|--------------|-----------------|--------------|
| 1400K4        | R1           | 145556       | 819        | 55           | 1480            | 105          |
|               |              | 131587       | 1044       |              |                 | 107          |
|               |              | 117618       | 1220       |              |                 | 108          |
|               |              | 101297       | 1366       |              |                 | 108          |
|               |              | 84976        | 1473       |              |                 | 108          |
|               | R2           | 167389       | 901        | 75           | 1480            | 107          |
|               |              | 151325       | 1126       |              |                 | 108          |
|               |              | 135261       | 1297       |              |                 | 109          |
|               |              | 116492       | 1438       |              |                 | 109          |
|               |              | 97722        | 1540       |              |                 | 109          |
|               | 0°           | 174463       | 923        | 90           | 1480            | 107          |
|               |              | 159208       | 1137       |              |                 | 109          |
|               |              | 146793       | 1274       |              |                 | 109          |
|               |              | 128861       | 1418       |              |                 | 110          |
|               |              | 106764       | 1543       |              |                 | 109          |
|               | R4           | 180573       | 957        | 90           | 1480            | 108          |
|               |              | 167587       | 1151       |              |                 | 109          |
|               |              | 154519       | 1301       |              |                 | 110          |
|               |              | 135643       | 1452       |              |                 | 110          |
|               |              | 115637       | 1552       |              |                 | 110          |
|               | R5           | 186158       | 990        | 110          | 1480            | 108          |
|               |              | 172770       | 1200       |              |                 | 109          |
|               |              | 159298       | 1382       |              |                 | 110          |
|               |              | 145522       | 1492       |              |                 | 111          |
|               |              | 128733       | 1563       |              |                 | 110          |

型号 1400K6

叶轮直径 **Wheel Diameter:** 1400mm


叶轮形式 **Wheel type:** 轴流 Axial

最大转速 **Max RPM:** 960RPM

最大风量**Max Volume:** 140000m³/h

最大全压 **Max T.P. :**1000Pa

重量**Weight:** 460Kg

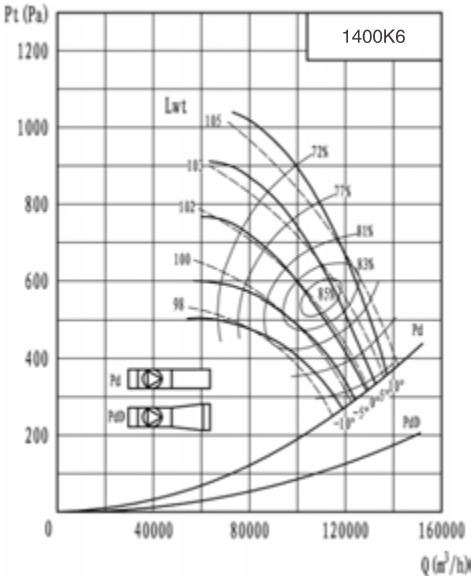

|          |     |     |     |     |      |      |      |      |
|----------|-----|-----|-----|-----|------|------|------|------|
| 频率（Hz）   | 63  | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 |
| 自由空间（dB） | -13 | -8  | -4  | -5  | -7   | -11  | -18  | -23  |
| 管道内(dB)  | -11 | -7  | -4  | -5  | -7   | -11  | -18  | -23  |

| 型号规格<br>Model | 安装角<br>Angle | 风量<br>(m³/h) | 全压<br>(Pa) | 电机功率<br>(KW) | 转速<br>( r/min ) | 声功率级<br>d(B) |
|---------------|--------------|--------------|------------|--------------|-----------------|--------------|
| 1400K6        | R1           | 101703       | 396        | 18.5         | 980             | 97           |
|               |              | 93627        | 436        |              |                 | 98           |
|               |              | 87186        | 458        |              |                 | 98           |
|               |              | 78465        | 481        |              |                 | 98           |
|               |              | 70881        | 495        |              |                 | 98           |
|               | R2           | 107131       | 447        | 22           | 980             | 99           |
|               |              | 99603        | 490        |              |                 | 99           |
|               |              | 92751        | 524        |              |                 | 99           |
|               |              | 83473        | 561        |              |                 | 100          |
|               |              | 73278        | 586        |              |                 | 99           |
|               | 0°           | 111672       | 498        | 30           | 980             | 100          |
|               |              | 101620       | 584        |              |                 | 101          |
|               |              | 92724        | 651        |              |                 | 101          |
|               |              | 84939        | 696        |              |                 | 102          |
|               |              | 76864        | 735        |              |                 | 102          |
|               | R4           | 117338       | 552        | 37           | 980             | 101          |
|               |              | 108432       | 657        |              |                 | 102          |
|               |              | 98826        | 752        |              |                 | 103          |
|               |              | 89322        | 823        |              |                 | 103          |
|               |              | 79684        | 872        |              |                 | 103          |
|               | R5           | 125361       | 581        | 45           | 980             | 102          |
|               |              | 115846       | 724        |              |                 | 103          |
|               |              | 105583       | 843        |              |                 | 104          |
|               |              | 95429        | 932        |              |                 | 105          |
|               |              | 82996        | 1006       |              |                 | 105          |

型号 1500K6

叶轮直径 **Wheel Diameter:** 1500mm


叶轮形式 **Wheel type:** 轴流 Axial

最大转速 **Max RPM:** 960RPM

最大风量**Max Volume:** 170000m³/h

最大全压 **Max T.P.:**1000Pa

重量**Weight:** 550Kg

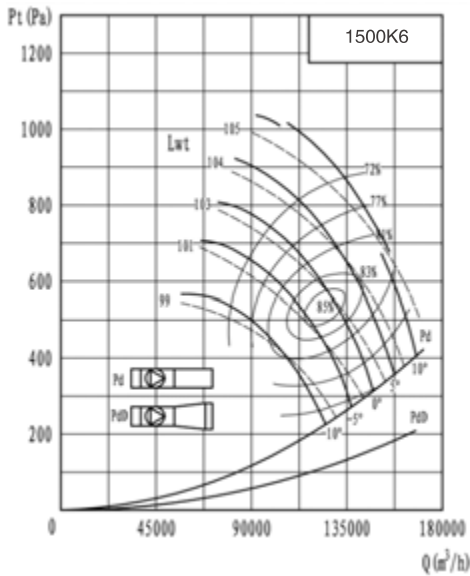

|          |     |     |     |     |      |      |      |      |
|----------|-----|-----|-----|-----|------|------|------|------|
| 频率（Hz）   | 63  | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 |
| 自由空间（dB） | -13 | -8  | -4  | -5  | -7   | -11  | -18  | -23  |
| 管道内(dB)  | -11 | -7  | -4  | -5  | -7   | -11  | -18  | -23  |

| 型号规格<br>Model | 安装角<br>Angle | 风量<br>(m³/h) | 全压<br>(Pa) | 电机功率<br>(KW) | 转速<br>( r/min ) | 声功率级<br>d(B) |
|---------------|--------------|--------------|------------|--------------|-----------------|--------------|
| 1500K6        | R1           | 111465       | 365        | 22           | 980             | 97           |
|               |              | 102069       | 433        |              |                 | 98           |
|               |              | 92673        | 487        |              |                 | 99           |
|               |              | 84375        | 522        |              |                 | 99           |
|               |              | 76075        | 548        |              |                 | 99           |
|               | R2           | 123565       | 448        | 30           | 980             | 99           |
|               |              | 113149       | 532        |              |                 | 100          |
|               |              | 102733       | 598        |              |                 | 101          |
|               |              | 93533        | 641        |              |                 | 101          |
|               |              | 84333        | 674        |              |                 | 101          |
|               | 0°           | 132488       | 515        | 37           | 980             | 101          |
|               |              | 121320       | 612        |              |                 | 102          |
|               |              | 110152       | 688        |              |                 | 103          |
|               |              | 100288       | 737        |              |                 | 103          |
|               |              | 90423        | 775        |              |                 | 103          |
|               | R4           | 141411       | 587        | 45           | 980             | 102          |
|               |              | 129491       | 697        |              |                 | 103          |
|               |              | 117571       | 784        |              |                 | 104          |
|               |              | 107043       | 840        |              |                 | 104          |
|               |              | 96514        | 883        |              |                 | 104          |
|               | R5           | 151242       | 672        | 55           | 980             | 104          |
|               |              | 138493       | 798        |              |                 | 105          |
|               |              | 125744       | 897        |              |                 | 105          |
|               |              | 114484       | 961        |              |                 | 106          |
|               |              | 103223       | 1010       |              |                 | 106          |

型号 1600K6

叶轮直径 **Wheel Diameter:** 1600mm


叶轮形式 **Wheel type:** 轴流 Axial

最大转速 **Max RPM:** 960RPM

最大风量**Max Volume:** 220000m³/h

最大全压 **Max T.P.:**1200Pa

重量**Weight:** 700Kg

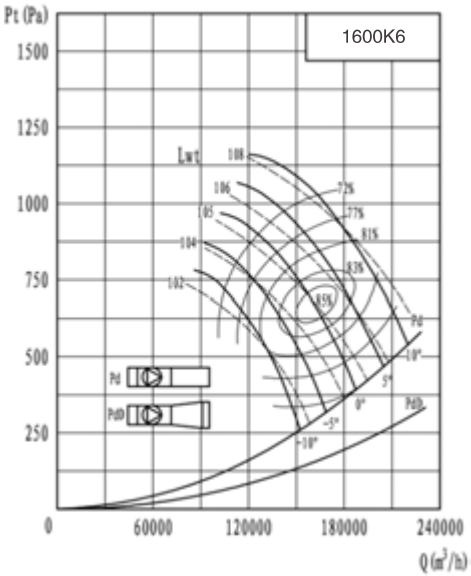

|          |     |     |     |     |      |      |      |      |
|----------|-----|-----|-----|-----|------|------|------|------|
| 频率（Hz）   | 63  | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 |
| 自由空间（dB） | -13 | -8  | -4  | -5  | -7   | -11  | -18  | -23  |
| 管道内(dB)  | -11 | -7  | -4  | -5  | -7   | -11  | -18  | -23  |

| 型号规格<br>Model | 安装角<br>Angle | 风量<br>(m³/h) | 全压<br>(Pa) | 电机功率<br>(KW) | 转速<br>( r/min ) | 声功率级<br>d(B) |
|---------------|--------------|--------------|------------|--------------|-----------------|--------------|
| 1600K6        | R1           | 139736       | 439        | 37           | 980             | 100          |
|               |              | 131986       | 521        |              |                 | 101          |
|               |              | 123036       | 599        |              |                 | 102          |
|               |              | 113013       | 669        |              |                 | 102          |
|               |              | 102989       | 731        |              |                 | 103          |
|               | R2           | 150573       | 532        | 45           | 980             | 102          |
|               |              | 141011       | 620        |              |                 | 103          |
|               |              | 131449       | 696        |              |                 | 103          |
|               |              | 120740       | 765        |              |                 | 104          |
|               |              | 110031       | 820        |              |                 | 104          |
|               | 0°           | 163795       | 648        | 55           | 980             | 104          |
|               |              | 151716       | 747        |              |                 | 105          |
|               |              | 139636       | 829        |              |                 | 105          |
|               |              | 129527       | 883        |              |                 | 105          |
|               |              | 119417       | 927        |              |                 | 106          |
|               | R4           | 177156       | 746        | 75           | 980             | 105          |
|               |              | 165982       | 833        |              |                 | 106          |
|               |              | 154807       | 906        |              |                 | 106          |
|               |              | 141382       | 979        |              |                 | 107          |
|               |              | 127957       | 1034       |              |                 | 107          |
|               | R5           | 189246       | 846        | 90           | 980             | 107          |
|               |              | 176372       | 942        |              |                 | 107          |
|               |              | 164498       | 1022       |              |                 | 108          |
|               |              | 151233       | 1086       |              |                 | 108          |
|               |              | 135967       | 1138       |              |                 | 108          |

## 型号 1700K6

**叶轮直径 Wheel Diameter:** 1700mm


**叶轮形式 Wheel type:** 轴流 Axial

**最大转速 Max RPM:** 960RPM

**最大风量Max Volume:** 250000m³/h

**最大全压 Max T.P. :1300Pa**

**重量Weight:** 1020Kg

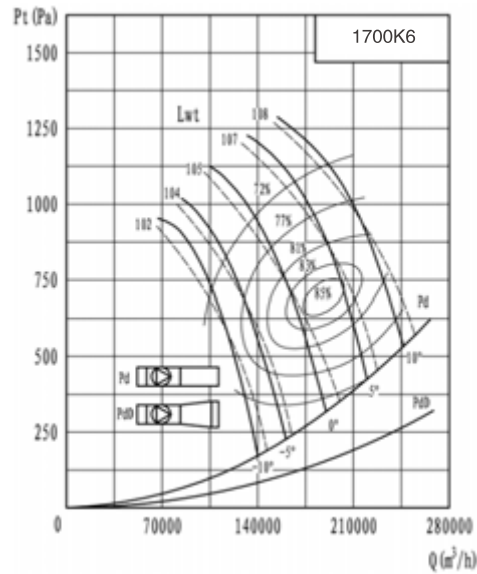

|           |     |     |     |     |      |      |      |      |
|-----------|-----|-----|-----|-----|------|------|------|------|
| 频率 (Hz)   | 63  | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 |
| 自由空间 (dB) | -13 | -8  | -4  | -5  | -7   | -11  | -18  | -23  |
| 管道内(dB)   | -11 | -7  | -4  | -5  | -7   | -11  | -18  | -23  |

| 型号规格<br>Model | 安装角<br>Angle | 风量<br>(m³/h) | 全压<br>(Pa) | 电机功率<br>(KW) | 转速<br>( r/min ) | 声功率级<br>d(B) |
|---------------|--------------|--------------|------------|--------------|-----------------|--------------|
| 1700K6        | R1           | 122533       | 506        | 45           | 980             | 100          |
|               |              | 112387       | 651        |              |                 | 102          |
|               |              | 102240       | 767        |              |                 | 103          |
|               |              | 92713        | 851        |              |                 | 104          |
|               |              | 83186        | 911        |              |                 | 104          |
|               | R2           | 141673       | 530        | 55           | 980             | 101          |
|               |              | 130964       | 677        |              |                 | 103          |
|               |              | 121255       | 786        |              |                 | 104          |
|               |              | 110219       | 882        |              |                 | 105          |
|               |              | 98182        | 959        |              |                 | 105          |
|               | 0°           | 172582       | 600        | 75           | 980             | 103          |
|               |              | 158291       | 772        |              |                 | 105          |
|               |              | 144000       | 910        |              |                 | 106          |
|               |              | 130582       | 1010       |              |                 | 107          |
|               |              | 117164       | 1081       |              |                 | 107          |
|               | R4           | 203127       | 713        | 90           | 980             | 106          |
|               |              | 188400       | 898        |              |                 | 107          |
|               |              | 173673       | 1027       |              |                 | 108          |
|               |              | 157419       | 1131       |              |                 | 108          |
|               |              | 141164       | 1200       |              |                 | 108          |
|               | R5           | 226346       | 821        | 110          | 980             | 107          |
|               |              | 210021       | 997        |              |                 | 109          |
|               |              | 193695       | 1119       |              |                 | 109          |
|               |              | 174070       | 1216       |              |                 | 110          |
| 154445        |              | 1287         | 109        |              |                 |              |

## 型号 1800K6

**叶轮直径 Wheel Diameter:** 1800mm


**叶轮形式 Wheel type:** 轴流 Axial

**最大转速 Max RPM:** 960RPM

**最大风量Max Volume:** 310000m³/h

最大全压 Max T.P.:1300Pa

**重量Weight:** 1120Kg

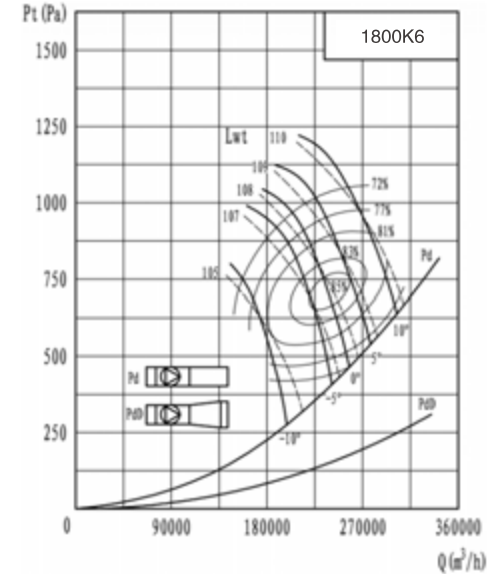

|           |     |     |     |     |      |      |      |      |
|-----------|-----|-----|-----|-----|------|------|------|------|
| 频率 (Hz)   | 63  | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 |
| 自由空间 (dB) | -13 | -8  | -4  | -5  | -7   | -11  | -18  | -23  |
| 管道内(dB)   | -11 | -7  | -4  | -5  | -7   | -11  | -18  | -23  |

| 型号规格<br>Model | 安装角<br>Angle | 风量<br>(m³/h) | 全压<br>(Pa) | 电机功率<br>(KW) | 转速<br>( r/min ) | 声功率级<br>d(B) |
|---------------|--------------|--------------|------------|--------------|-----------------|--------------|
| 1800K6        | R1           | 186402       | 478        | 55           | 980             | 102          |
|               |              | 177098       | 589        |              |                 | 103          |
|               |              | 167793       | 680        |              |                 | 104          |
|               |              | 156732       | 753        |              |                 | 105          |
|               |              | 145671       | 800        |              |                 | 105          |
|               | R2           | 232094       | 560        | 75           | 980             | 104          |
|               |              | 215047       | 750        |              |                 | 106          |
|               |              | 198000       | 880        |              |                 | 107          |
|               |              | 179609       | 950        |              |                 | 108          |
|               |              | 161218       | 990        |              |                 | 107          |
|               | 0°           | 248228       | 593        | 90           | 980             | 105          |
|               |              | 232114       | 763        |              |                 | 107          |
|               |              | 216000       | 900        |              |                 | 108          |
|               |              | 196027       | 998        |              |                 | 108          |
|               |              | 176054       | 1044       |              |                 | 108          |
|               | R4           | 269356       | 644        | 110          | 980             | 106          |
|               |              | 252130       | 812        |              |                 | 108          |
|               |              | 230904       | 985        |              |                 | 109          |
|               |              | 209553       | 1085       |              |                 | 109          |
|               |              | 188202       | 1123       |              |                 | 109          |
|               | R5           | 295687       | 718        | 132          | 980             | 107          |
|               |              | 268682       | 966        |              |                 | 109          |
|               |              | 249376       | 1095       |              |                 | 110          |
|               |              | 229687       | 1181       |              |                 | 110          |
|               |              | 209997       | 1221       |              |                 | 110          |

型号 1900K6

叶轮直径 **Wheel Diameter:** 1900mm


叶轮形式 **Wheel type:** 轴流 Axial

最大转速 **Max RPM:** 960RPM

最大风量**Max Volume:** 320000m³/h

最大全压 **Max T.P. :**1200Pa

重量**Weight:** 1450Kg

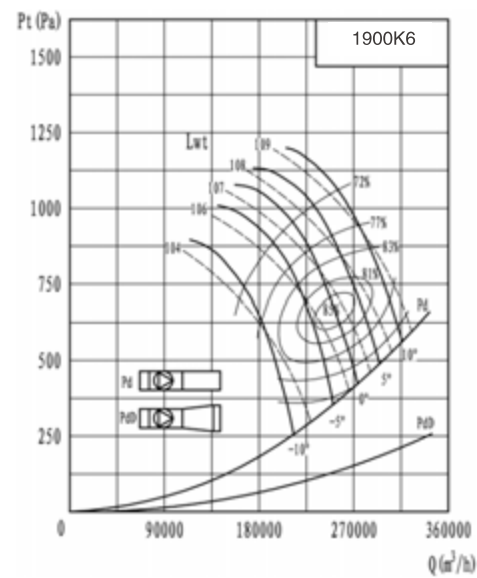

|          |     |     |     |     |      |      |      |      |
|----------|-----|-----|-----|-----|------|------|------|------|
| 频率（Hz）   | 63  | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 |
| 自由空间（dB） | -13 | -8  | -4  | -5  | -7   | -11  | -18  | -23  |
| 管道内(dB)  | -11 | -7  | -4  | -5  | -7   | -11  | -18  | -23  |

| 型号规格<br>Model | 安装角<br>Angle | 风量<br>(m³/h) | 全压<br>(Pa) | 电机功率<br>(KW) | 转速<br>( r/min ) | 声功率级<br>d(B) |
|---------------|--------------|--------------|------------|--------------|-----------------|--------------|
| 1900K6        | R1           | 198292       | 463        | 55           | 980             | 102          |
|               |              | 188602       | 573        |              |                 | 103          |
|               |              | 178412       | 662        |              |                 | 104          |
|               |              | 165040       | 745        |              |                 | 105          |
|               |              | 150167       | 811        |              |                 | 105          |
|               | R2           | 237814       | 547        | 75           | 980             | 104          |
|               |              | 221471       | 812        |              |                 | 106          |
|               |              | 205128       | 831        |              |                 | 107          |
|               |              | 186664       | 913        |              |                 | 107          |
|               |              | 168200       | 968        |              |                 | 107          |
|               | 0°           | 258248       | 603        | 90           | 980             | 105          |
|               |              | 242524       | 752        |              |                 | 107          |
|               |              | 226800       | 875        |              |                 | 108          |
|               |              | 206828       | 976        |              |                 | 108          |
|               |              | 186856       | 1040       |              |                 | 108          |
|               | R4           | 279540       | 658        | 110          | 980             | 106          |
|               |              | 262499       | 808        |              |                 | 108          |
|               |              | 243457       | 947        |              |                 | 109          |
|               |              | 223139       | 1046       |              |                 | 109          |
|               |              | 202821       | 1101       |              |                 | 109          |
|               | R5           | 301415       | 725        | 132          | 980             | 107          |
|               |              | 279749       | 910        |              |                 | 109          |
|               |              | 261931       | 1025       |              |                 | 110          |
|               |              | 242804       | 1112       |              |                 | 110          |
|               |              | 221675       | 1175       |              |                 | 110          |

型号 2000K6

叶轮直径 **Wheel Diameter:** 2000mm


叶轮形式 **Wheel type:** 轴流 Axial

最大转速 **Max RPM:** 960RPM

最大风量**Max Volume:** 340000m³/h

最大全压 **Max T.P. :**1200Pa

重量**Weight:** 1880Kg

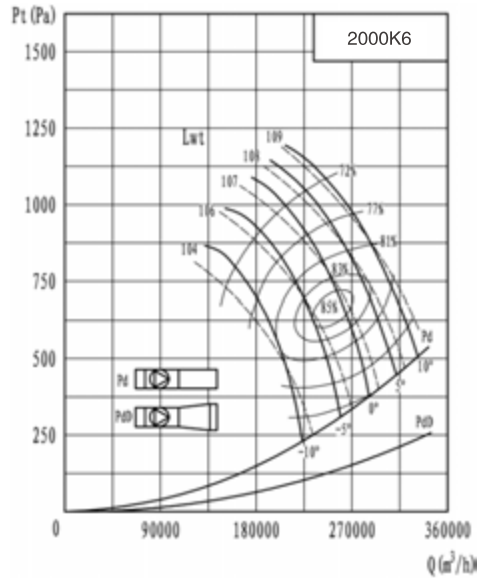

|          |     |     |     |     |      |      |      |      |
|----------|-----|-----|-----|-----|------|------|------|------|
| 频率（Hz）   | 63  | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 |
| 自由空间（dB） | -13 | -8  | -4  | -5  | -7   | -11  | -18  | -23  |
| 管道内(dB)  | -11 | -7  | -4  | -5  | -7   | -11  | -18  | -23  |

| 型号规格<br>Model | 安装角<br>Angle | 风量<br>(m³/h) | 全压<br>(Pa) | 电机功率<br>(KW) | 转速<br>( r/min ) | 声功率级<br>d(B) |
|---------------|--------------|--------------|------------|--------------|-----------------|--------------|
| 2000K6        | R1           | 210182       | 448        | 55           | 980             | 102          |
|               |              | 200106       | 556        |              |                 | 103          |
|               |              | 189030       | 644        |              |                 | 104          |
|               |              | 173347       | 736        |              |                 | 105          |
|               |              | 154663       | 821        |              |                 | 106          |
|               | R2           | 243533       | 533        | 75           | 980             | 104          |
|               |              | 227895       | 673        |              |                 | 106          |
|               |              | 212256       | 781        |              |                 | 107          |
|               |              | 193719       | 876        |              |                 | 107          |
|               |              | 175181       | 945        |              |                 | 107          |
|               | 0°           | 268267       | 612        | 90           | 980             | 105          |
|               |              | 252934       | 741        |              |                 | 107          |
|               |              | 237600       | 850        |              |                 | 108          |
|               |              | 217629       | 954        |              |                 | 108          |
|               |              | 197657       | 1035       |              |                 | 109          |
|               | R4           | 289724       | 672        | 110          | 980             | 107          |
|               |              | 272867       | 803        |              |                 | 108          |
|               |              | 256010       | 908        |              |                 | 109          |
|               |              | 236725       | 1006       |              |                 | 109          |
|               |              | 217440       | 1079       |              |                 | 109          |
|               | R5           | 307142       | 732        | 132          | 980             | 108          |
|               |              | 290815       | 853        |              |                 | 109          |
|               |              | 274485       | 955        |              |                 | 109          |
|               |              | 255921       | 1043       |              |                 | 110          |
|               |              | 233352       | 1129       |              |                 | 110          |

型号 2100K6

叶轮直径 **Wheel Diameter:** 2100mm


叶轮形式 **Wheel type:** 轴流 Axial

最大转速 **Max RPM:** 960RPM

最大风量**Max Volume:** 400000m³/h

最大全压 **Max T.P. :**1250Pa

重量**Weight:** 2200Kg

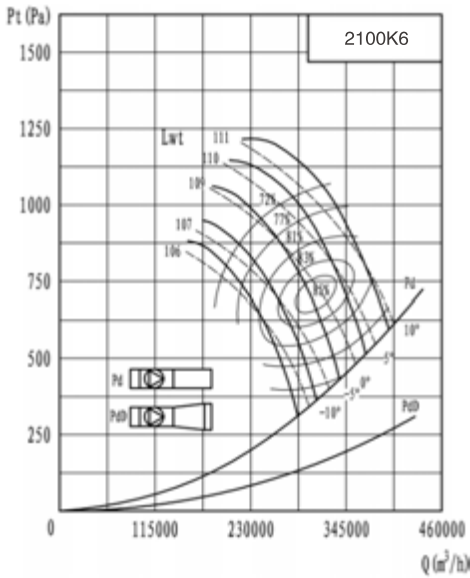

|          |     |     |     |     |      |      |      |      |
|----------|-----|-----|-----|-----|------|------|------|------|
| 频率（Hz）   | 63  | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 |
| 自由空间（dB） | -13 | -8  | -4  | -5  | -7   | -11  | -18  | -23  |
| 管道内(dB)  | -11 | -7  | -4  | -5  | -7   | -11  | -18  | -23  |

| 型号规格<br>Model | 安装角<br>Angle | 风量<br>(m³/h) | 全压<br>(Pa) | 电机功率<br>(KW) | 转速<br>( r/min ) | 声功率级<br>d(B) |
|---------------|--------------|--------------|------------|--------------|-----------------|--------------|
| 2100K6        | R1           | 263541       | 512        | 75           | 980             | 104          |
|               |              | 249109       | 603        |              |                 | 105          |
|               |              | 228677       | 702        |              |                 | 106          |
|               |              | 205314       | 787        |              |                 | 107          |
|               |              | 181950       | 849        |              |                 | 107          |
|               | R2           | 286746       | 556        | 90           | 980             | 105          |
|               |              | 265010       | 682        |              |                 | 107          |
|               |              | 243273       | 783        |              |                 | 107          |
|               |              | 218419       | 866        |              |                 | 108          |
|               |              | 193564       | 923        |              |                 | 108          |
|               | 0°           | 315147       | 617        | 110          | 980             | 106          |
|               |              | 294068       | 749        |              |                 | 108          |
|               |              | 272989       | 848        |              |                 | 109          |
|               |              | 243522       | 952        |              |                 | 109          |
|               |              | 214055       | 1029       |              |                 | 109          |
|               | R4           | 348563       | 682        | 132          | 980             | 108          |
|               |              | 324607       | 834        |              |                 | 109          |
|               |              | 300651       | 955        |              |                 | 110          |
|               |              | 270072       | 1056       |              |                 | 110          |
|               |              | 239493       | 1119       |              |                 | 111          |
|               | R5           | 376077       | 748        | 160          | 980             | 109          |
|               |              | 352383       | 896        |              |                 | 110          |
|               |              | 321690       | 1045       |              |                 | 111          |
|               |              | 286276       | 1147       |              |                 | 112          |
|               |              | 258963       | 1200       |              |                 | 112          |

型号 2200K8

叶轮直径 **Wheel Diameter:** 2200mm


叶轮形式 **Wheel type:** 轴流 Axial

最大转速 **Max RPM:** 720RPM

最大风量**Max Volume:** 430000m³/h

最大全压 **Max T.P. :**1300Pa

重量**Weight:** 2550Kg

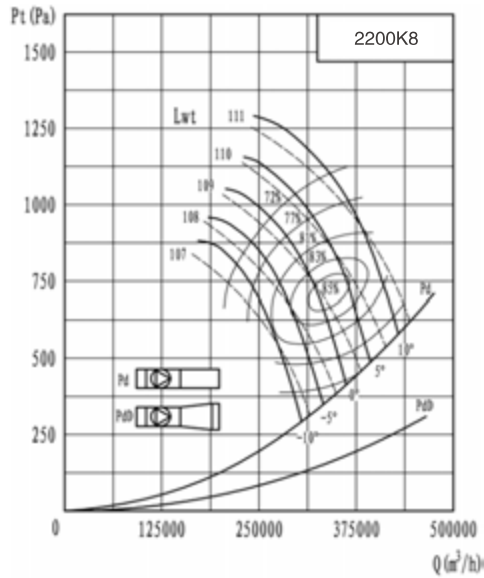

|          |     |     |     |     |      |      |      |      |
|----------|-----|-----|-----|-----|------|------|------|------|
| 频率（Hz）   | 63  | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 |
| 自由空间（dB） | -12 | -7  | -3  | -5  | -7   | -9   | -16  | -21  |
| 管道内(dB)  | -10 | -6  | -3  | -5  | -7   | -9   | -16  | -21  |

| 型号规格<br>Model | 安装角<br>Angle | 风量<br>(m³/h) | 全压<br>(Pa) | 电机功率<br>(KW) | 转速<br>( r/min ) | 声功率级<br>d(B) |
|---------------|--------------|--------------|------------|--------------|-----------------|--------------|
| 2200K8        | R1           | 278520       | 516        | 75           | 740             | 104          |
|               |              | 264477       | 612        |              |                 | 105          |
|               |              | 249433       | 697        |              |                 | 106          |
|               |              | 228753       | 782        |              |                 | 107          |
|               |              | 201073       | 857        |              |                 | 107          |
|               | R2           | 306610       | 560        | 90           | 740             | 105          |
|               |              | 289561       | 673        |              |                 | 107          |
|               |              | 272511       | 765        |              |                 | 107          |
|               |              | 243096       | 871        |              |                 | 108          |
|               |              | 213680       | 934        |              |                 | 108          |
|               | 0°           | 339315       | 613        | 110          | 740             | 106          |
|               |              | 320447       | 741        |              |                 | 108          |
|               |              | 301579       | 836        |              |                 | 109          |
|               |              | 269026       | 948        |              |                 | 109          |
|               |              | 236473       | 1021       |              |                 | 109          |
|               | R4           | 372020       | 672        | 132          | 740             | 108          |
|               |              | 354334       | 805        |              |                 | 109          |
|               |              | 330647       | 918        |              |                 | 110          |
|               |              | 299956       | 1026       |              |                 | 110          |
|               |              | 259265       | 1121       |              |                 | 111          |
|               | R5           | 408813       | 747        | 160          | 740             | 109          |
|               |              | 386081       | 904        |              |                 | 110          |
|               |              | 363348       | 1020       |              |                 | 111          |
|               |              | 324128       | 1153       |              |                 | 112          |
|               |              | 284907       | 1245       |              |                 | 112          |

型号 2300K8

叶轮直径 **Wheel Diameter:** 2300mm


叶轮形式 **Wheel type:** 轴流 Axial

最大转速 **Max RPM:** 720RPM

最大风量**Max Volume:** 455000m³/h

最大全压 **Max T.P. :**1400Pa

重量**Weight:** 2800Kg

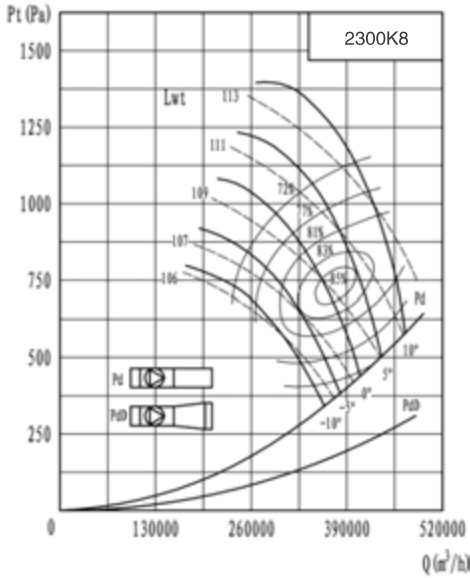

|          |     |     |     |     |      |      |      |      |
|----------|-----|-----|-----|-----|------|------|------|------|
| 频率（Hz）   | 63  | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 |
| 自由空间（dB） | -12 | -7  | -3  | -5  | -7   | -9   | -16  | -21  |
| 管道内(dB)  | -10 | -6  | -3  | -5  | -7   | -9   | -16  | -21  |

| 型号规格<br>Model | 安装角<br>Angle | 风量<br>(m³/h) | 全压<br>(Pa) | 电机功率<br>(KW) | 转速<br>( r/min ) | 声功率级<br>d(B) |
|---------------|--------------|--------------|------------|--------------|-----------------|--------------|
| 2300K8        | R1           | 332401       | 463        | 90           | 740             | 104          |
|               |              | 37500        | 558        |              |                 | 105          |
|               |              | 282600       | 632        |              |                 | 106          |
|               |              | 254182       | 702        |              |                 | 106          |
|               |              | 223903       | 748        |              |                 | 106          |
|               | R2           | 353119       | 532        | 110          | 740             | 105          |
|               |              | 328495       | 641        |              |                 | 107          |
|               |              | 303871       | 727        |              |                 | 107          |
|               |              | 273314       | 807        |              |                 | 108          |
|               |              | 240756       | 866        |              |                 | 108          |
|               | 0°           | 376720       | 653        | 132          | 740             | 107          |
|               |              | 354638       | 760        |              |                 | 109          |
|               |              | 330556       | 858        |              |                 | 109          |
|               |              | 299398       | 954        |              |                 | 110          |
|               |              | 260240       | 1037       |              |                 | 110          |
|               | R4           | 406294       | 761        | 160          | 740             | 109          |
|               |              | 381869       | 903        |              |                 | 110          |
|               |              | 358443       | 1012       |              |                 | 111          |
|               |              | 325753       | 1114       |              |                 | 111          |
|               |              | 291062       | 1187       |              |                 | 112          |
|               | R5           | 440805       | 896        | 200          | 740             | 111          |
|               |              | 417785       | 1051       |              |                 | 112          |
|               |              | 394765       | 1165       |              |                 | 113          |
|               |              | 364614       | 1271       |              |                 | 113          |
|               |              | 334462       | 1346       |              |                 | 113          |

型号 2400K8

叶轮直径 **Wheel Diameter:** 2400mm


叶轮形式 **Wheel type:** 轴流 Axial

最大转速 **Max RPM:** 720RPM

最大风量**Max Volume:** 550000m³/h

最大全压 **Max T.P. :**1400Pa

重量**Weight:** 3050Kg

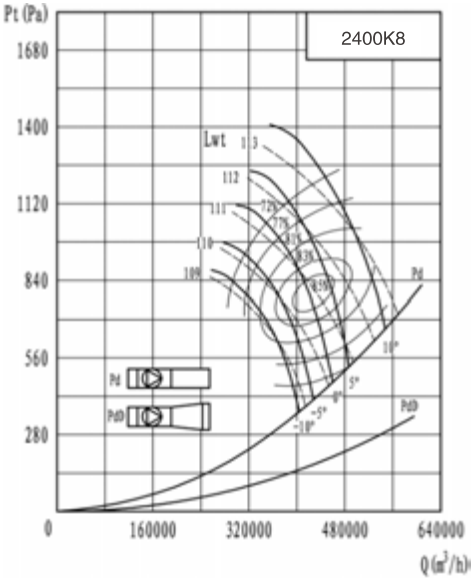

|          |     |     |     |     |      |      |      |      |
|----------|-----|-----|-----|-----|------|------|------|------|
| 频率（Hz）   | 63  | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 |
| 自由空间（dB） | -12 | -7  | -3  | -5  | -7   | -9   | -16  | -21  |
| 管道内(dB)  | -10 | -6  | -3  | -5  | -7   | -9   | -16  | -21  |

| 型号规格<br>Model | 安装角<br>Angle | 风量<br>(m³/h) | 全压<br>(Pa) | 电机功率<br>(KW) | 转速<br>( r/min ) | 声功率级<br>d(B) |
|---------------|--------------|--------------|------------|--------------|-----------------|--------------|
| 2400K8        | R1           | 390099       | 486        | 110          | 740             | 105          |
|               |              | 370365       | 608        |              |                 | 107          |
|               |              | 347990       | 702        |              |                 | 108          |
|               |              | 327143       | 763        |              |                 | 108          |
|               |              | 297495       | 827        |              |                 | 109          |
|               | R2           | 412263       | 549        | 132          | 740             | 106          |
|               |              | 391408       | 687        |              |                 | 108          |
|               |              | 367762       | 793        |              |                 | 109          |
|               |              | 345730       | 862        |              |                 | 110          |
|               |              | 314398       | 934        |              |                 | 110          |
|               | 0°           | 443294       | 631        | 160          | 740             | 108          |
|               |              | 420869       | 790        |              |                 | 110          |
|               |              | 395443       | 912        |              |                 | 111          |
|               |              | 371753       | 991        |              |                 | 111          |
|               |              | 338062       | 1074       |              |                 | 111          |
|               | R4           | 470822       | 706        | 200          | 740             | 109          |
|               |              | 449474       | 861        |              |                 | 111          |
|               |              | 418126       | 1016       |              |                 | 112          |
|               |              | 391723       | 1112       |              |                 | 112          |
|               |              | 365319       | 1187       |              |                 | 113          |
|               | R5           | 526640       | 838        | 250          | 740             | 111          |
|               |              | 499052       | 1002       |              |                 | 112          |
|               |              | 473540       | 1118       |              |                 | 113          |
|               |              | 444744       | 1226       |              |                 | 114          |
|               |              | 407947       | 1336       |              |                 | 114          |

型号 2500K8

叶轮直径 **Wheel Diameter:** 2500mm


叶轮形式 **Wheel type:** 轴流 Axial

最大转速 **Max RPM:** 720RPM

最大风量**Max Volume:** 620000m³/h

最大全压 **Max T.P. :**1450Pa

重量**Weight:** 3300Kg

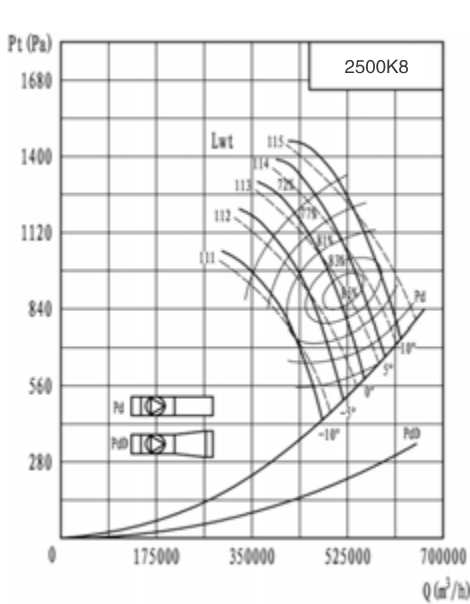

|          |     |     |     |     |      |      |      |      |
|----------|-----|-----|-----|-----|------|------|------|------|
| 频率（Hz）   | 63  | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 |
| 自由空间（dB） | -12 | -7  | -3  | -5  | -7   | -9   | -16  | -21  |
| 管道内(dB)  | -10 | -6  | -3  | -5  | -7   | -9   | -16  | -21  |

| 型号规格<br>Model | 安装角<br>Angle | 风量<br>(m³/h) | 全压<br>(Pa) | 电机功率<br>(KW) | 转速<br>(r/min) | 声功率级<br>d(B) |
|---------------|--------------|--------------|------------|--------------|---------------|--------------|
| 2500K8        | R1           | 452200       | 618        | 160          | 740           | 108          |
|               |              | 428774       | 742        |              |               | 109          |
|               |              | 398852       | 857        |              |               | 110          |
|               |              | 368478       | 936        |              |               | 111          |
|               |              | 341816       | 992        |              |               | 111          |
|               | R2           | 487285       | 719        | 200          | 740           | 109          |
|               |              | 462041       | 863        |              |               | 111          |
|               |              | 429797       | 996        |              |               | 112          |
|               |              | 397067       | 1088       |              |               | 112          |
|               |              | 368336       | 1153       |              |               | 112          |
|               | R3           | 526181       | 787        | 250          | 740           | 111          |
|               |              | 495748       | 946        |              |               | 112          |
|               |              | 471315       | 1056       |              |               | 113          |
|               |              | 438864       | 1163       |              |               | 113          |
|               |              | 406413       | 1245       |              |               | 113          |
|               | R4           | 560748       | 857        | 315          | 740           | 112          |
|               |              | 527155       | 1035       |              |               | 113          |
|               |              | 493561       | 1172       |              |               | 114          |
|               |              | 463964       | 1265       |              |               | 114          |
|               |              | 434367       | 1341       |              |               | 114          |
|               | R5           | 595274       | 910        | 355          | 740           | 112          |
|               |              | 559613       | 1103       |              |               | 114          |
|               |              | 523951       | 1256       |              |               | 115          |
|               |              | 492532       | 1358       |              |               | 115          |
|               |              | 461112       | 1424       |              |               | 115          |

型号 2600K8

叶轮直径 **Wheel Diameter:** 2600mm


叶轮形式 **Wheel type:** 轴流 Axial

最大转速 **Max RPM:** 720RPM

最大风量**Max Volume:** 700000m³/h

最大全压 **Max T.P. :**1600Pa

重量**Weight:** 3600Kg

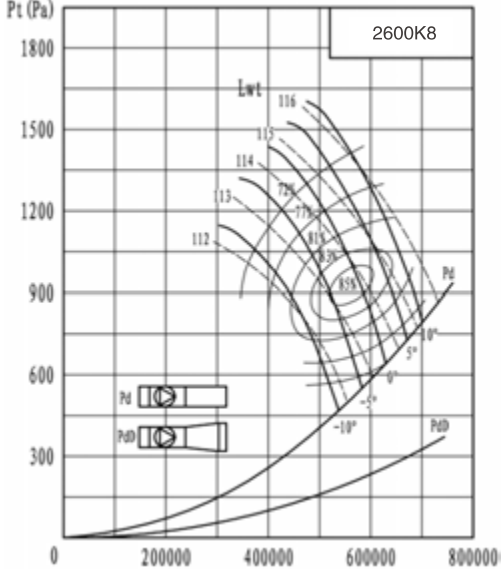

|          |     |     |     |     |      |      |      |      |
|----------|-----|-----|-----|-----|------|------|------|------|
| 频率（Hz）   | 63  | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 |
| 自由空间（dB） | -12 | -7  | -3  | -5  | -7   | -9   | -16  | -21  |
| 管道内(dB)  | -10 | -6  | -3  | -5  | -7   | -9   | -16  | -21  |

| 型号规格<br>Model | 安装角<br>Angle | 风量<br>(m³/h) | 全压<br>(Pa) | 电机功率<br>(KW) | 转速<br>( r/min ) | 声功率级<br>d(B) |
|---------------|--------------|--------------|------------|--------------|-----------------|--------------|
| 2600K8        | R1           | 506680       | 634        | 200          | 740             | 109          |
|               |              | 472944       | 791        |              |                 | 110          |
|               |              | 434609       | 921        |              |                 | 111          |
|               |              | 389271       | 1028       |              |                 | 112          |
|               |              | 340254       | 1114       |              |                 | 112          |
|               | R2           | 550739       | 746        | 250          | 740             | 110          |
|               |              | 514070       | 931        |              |                 | 112          |
|               |              | 472401       | 1083       |              |                 | 113          |
|               |              | 433121       | 1190       |              |                 | 113          |
|               |              | 387841       | 1279       |              |                 | 113          |
|               | 0°           | 598629       | 839        | 315          | 740             | 112          |
|               |              | 558772       | 1021       |              |                 | 113          |
|               |              | 518914       | 1172       |              |                 | 114          |
|               |              | 478914       | 1291       |              |                 | 114          |
|               |              | 432914       | 1396       |              |                 | 115          |
|               | R4           | 640763       | 907        | 355          | 740             | 113          |
|               |              | 602975       | 1083       |              |                 | 114          |
|               |              | 566187       | 1220       |              |                 | 115          |
|               |              | 521895       | 1361       |              |                 | 115          |
|               |              | 478602       | 1476       |              |                 | 116          |
|               | R5           | 668609       | 983        | 400          | 740             | 114          |
|               |              | 628554       | 1172       |              |                 | 115          |
|               |              | 588498       | 1327       |              |                 | 116          |
|               |              | 553208       | 1439       |              |                 | 116          |
|               |              | 517918       | 1537       |              |                 | 116          |

型号 2800K8

叶轮直径 Wheel Diameter: 2800mm


叶轮形式 Wheel type: 轴流 Axial

最大转速 Max RPM: 720RPM

最大风量Max Volume: 800000m³/h

最大全压 Max T.P. :1600Pa


重量Weight: 4150Kg

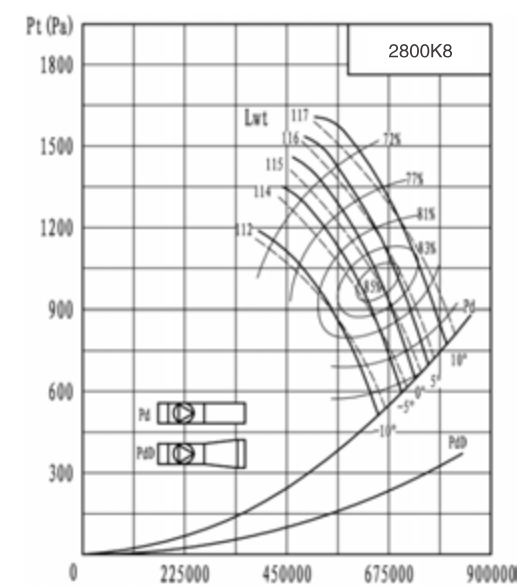

|            |     |     |     |     |      |      |      |      |
|------------|-----|-----|-----|-----|------|------|------|------|
| 频率 ( Hz )  | 63  | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 |
| 自由空间 ( dB) | -12 | -7  | -3  | -5  | -7   | -9   | -16  | -21  |
| 管道内(dB)    | -10 | -6  | -3  | -5  | -7   | -9   | -16  | -21  |

| 型号规格<br>Model | 安装角<br>Angle | 风量<br>(m³/h) | 全压<br>(Pa) | 电机功率<br>(KW) | 转速<br>( r/min ) | 声功率级<br>d(B) |
|---------------|--------------|--------------|------------|--------------|-----------------|--------------|
| 2800K8        | R1           | 630893       | 610        | 250          | 740             | 109          |
|               |              | 592272       | 765        |              |                 | 111          |
|               |              | 553651       | 888        |              |                 | 112          |
|               |              | 511142       | 996        |              |                 | 112          |
|               |              | 468633       | 1082       |              |                 | 113          |
|               | R2           | 680513       | 710        | 315          | 740             | 111          |
|               |              | 638855       | 891        |              |                 | 112          |
|               |              | 597197       | 1034       |              |                 | 113          |
|               |              | 551344       | 1160       |              |                 | 114          |
|               |              | 505492       | 1260       |              |                 | 114          |
|               | 0°           | 708868       | 772        | 355          | 740             | 112          |
|               |              | 665474       | 968        |              |                 | 113          |
|               |              | 622080       | 1124       |              |                 | 114          |
|               |              | 574317       | 1261       |              |                 | 115          |
|               |              | 526554       | 1370       |              |                 | 115          |
|               | R4           | 738404       | 821        | 400          | 740             | 112          |
|               |              | 693202       | 1029       |              |                 | 114          |
|               |              | 648000       | 1196       |              |                 | 115          |
|               |              | 598247       | 1333       |              |                 | 116          |
|               |              | 548494       | 1457       |              |                 | 116          |
|               | R5           | 782708       | 870        | 450          | 740             | 113          |
|               |              | 734794       | 1083       |              |                 | 115          |
|               |              | 686880       | 1268       |              |                 | 116          |
|               |              | 634142       | 1426       |              |                 | 117          |
|               |              | 581404       | 1544       |              |                 | 117          |


型号 1250T4

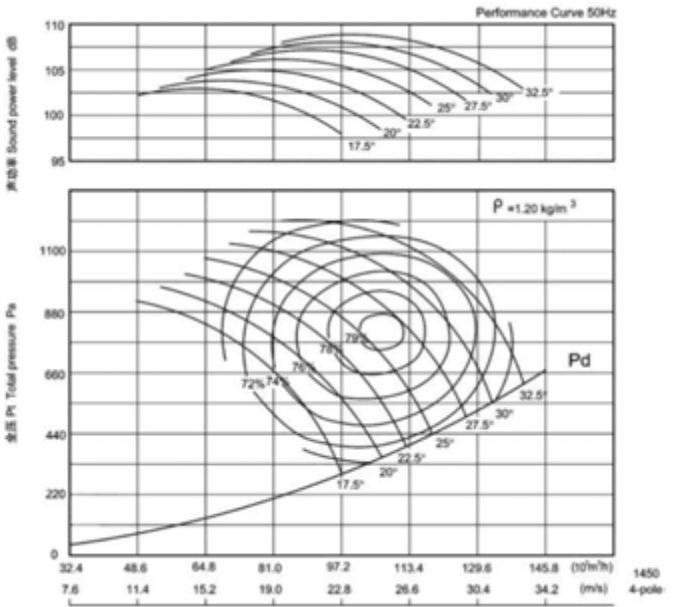

| 自由空间 Free-field (dB) |                   |     |     |     |    |     |     |     |
|----------------------|-------------------|-----|-----|-----|----|-----|-----|-----|
| Speed<br>min-1       | 频率 Frequency (Hz) |     |     |     |    |     |     |     |
|                      | 63                | 125 | 250 | 500 | 1K | 2K  | 4K  | 8K  |
| 1450                 | -15               | -12 | -1  | -3  | -6 | -12 | -20 | -25 |

| 型号规格<br>model | 安装角度<br>blade<br>setting<br>angle | 配用功率<br>power (kW) | 转速<br>speed<br>(r/min) | 重量<br>weight (kg) |
|---------------|-----------------------------------|--------------------|------------------------|-------------------|
| 1250T4-R1     | 17.5°                             | 30                 | 1480                   | 600               |
|               | 20°                               |                    |                        |                   |
| 1250T4-R2     | 22.5°                             | 37                 | 1480                   | 614               |
|               | 25°                               |                    |                        |                   |
| 1250T4-R3     | 27.5°                             | 45                 | 1480                   | 650               |
| 1250T4-R4     | 30°                               | 55                 | 1480                   | 657               |
| 1250T4-R5     | 32.5°                             | 75                 | 1480                   | 892               |


型号 1400T4

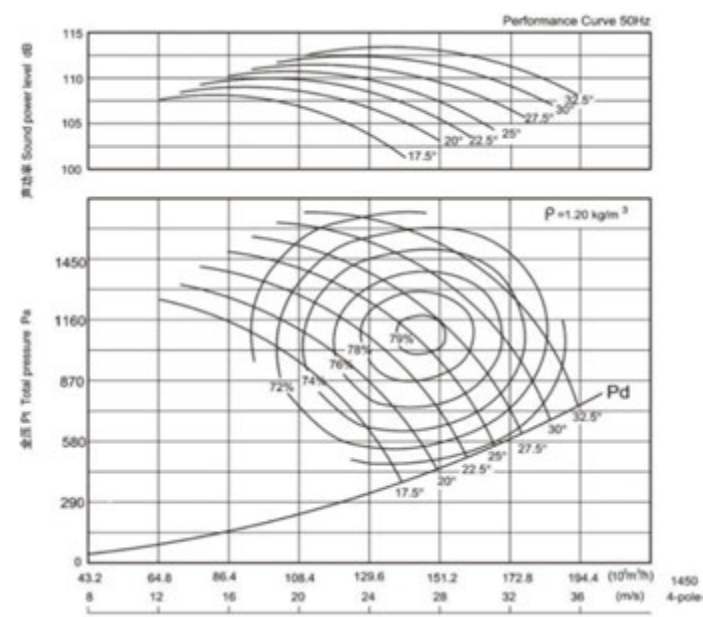

| 自由空间 Free-field (dB) |                  |     |     |     |    |     |     |     |
|----------------------|------------------|-----|-----|-----|----|-----|-----|-----|
| Speed<br>min-1       | 频率Frequency (Hz) |     |     |     |    |     |     |     |
|                      | 63               | 125 | 250 | 500 | 1K | 2K  | 4K  | 8K  |
| 1450                 | -15              | -12 | -1  | -3  | -6 | -12 | -20 | -25 |

| 型号规格<br>model | 安装角度<br>blade<br>setting<br>angle | 配用功率<br>power (kW) | 转速<br>speed<br>(r/min) | 重量<br>weight (kg) |
|---------------|-----------------------------------|--------------------|------------------------|-------------------|
| 1400T4-R1     | 17.5°                             | 45                 | 1480                   | 783               |
| 1400T4-R2     | 20°                               | 55                 | 1480                   | 890               |
|               | 22.5°                             |                    |                        |                   |
| 1400T4-R3     | 25°                               | 75                 | 1480                   | 1025              |
| 1400T4-R4     | 27.5°                             | 90                 | 1480                   | 1130              |
|               | 30°                               |                    |                        |                   |
| 1400T4-R5     | 32.5°                             | 110                | 1480                   | 1463              |


型号 1500T6

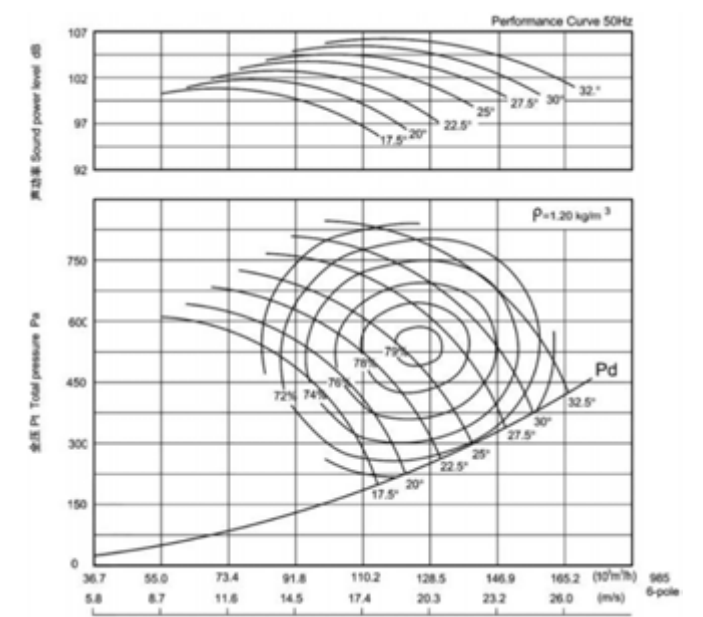

| 自由空间 Free-field (dB) |                   |     |     |     |    |     |     |     |
|----------------------|-------------------|-----|-----|-----|----|-----|-----|-----|
| Speed<br>min-1       | 频率 Frequency (Hz) |     |     |     |    |     |     |     |
|                      | 63                | 125 | 250 | 500 | 1K | 2K  | 4K  | 8K  |
| 985                  | -13               | -11 | -2  | -4  | -7 | -10 | -17 | -21 |

| 型号规格<br>model | 安装角度<br>blade<br>setting<br>angle | 配用功率<br>power (kW) | 转速<br>speed<br>(r/min) | 重量<br>weight (kg) |
|---------------|-----------------------------------|--------------------|------------------------|-------------------|
| 1500T6-R1     | 17.5°                             | 22                 | 980                    | 800               |
|               | 20°                               |                    |                        |                   |
| 1500T6-R2     | 22.5°                             | 30                 | 980                    | 842               |
|               | 25°                               |                    |                        |                   |
| 1500T6-R3     | 27.5°                             | 37                 | 980                    | 958               |
| 1500T6-R4     | 30°                               | 45                 | 980                    | 1086              |
| 1500T6-R5     | 32.5°                             | 55                 | 980                    | 1145              |


型号 1600T6

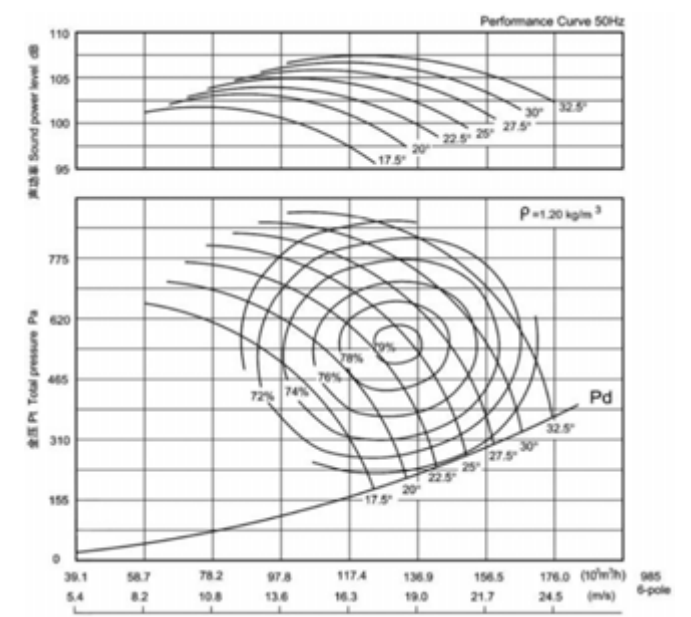

| 自由空间 Free-field (dB) |                  |     |     |     |    |     |     |     |
|----------------------|------------------|-----|-----|-----|----|-----|-----|-----|
| Speed<br>min-1       | 频率Frequency (Hz) |     |     |     |    |     |     |     |
|                      | 63               | 125 | 250 | 500 | 1K | 2K  | 4K  | 8K  |
| 985                  | -13              | -11 | -2  | -4  | -7 | -10 | -17 | -21 |

| 型号规格<br>model | 安装角度<br>blade<br>setting<br>angle | 配用功率<br>power (kW) | 转速<br>speed<br>(r/min) | 重量<br>weight (kg) |
|---------------|-----------------------------------|--------------------|------------------------|-------------------|
| 1600T6-R1     | 17.5°                             | 22                 | 980                    | 1270              |
| 1600T6-R2     | 20°                               | 30                 | 980                    | 1312              |
|               | 22.5°                             |                    |                        |                   |
| 1600T6-R3     | 25°                               | 37                 | 980                    | 1428              |
| 1600T6-R4     | 27.5°                             | 45                 | 980                    | 1556              |
|               | 30°                               |                    |                        |                   |
| 1600T6-R5     | 32.5°                             | 55                 | 980                    | 1615              |


型号 1800T6

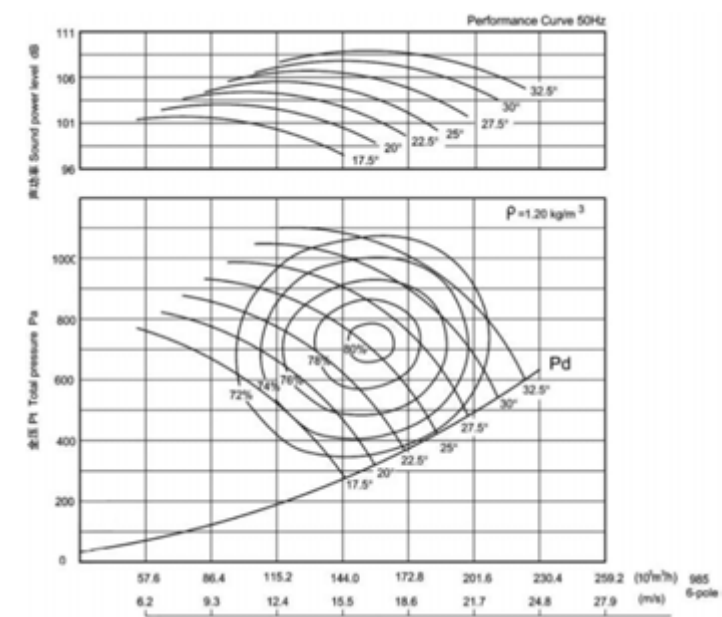

| 自由空间 Free-field (dB) |                   |     |     |     |    |     |     |     |
|----------------------|-------------------|-----|-----|-----|----|-----|-----|-----|
| Speed<br>min-1       | 频率 Frequency (Hz) |     |     |     |    |     |     |     |
|                      | 63                | 125 | 250 | 500 | 1K | 2K  | 4K  | 8K  |
| 985                  | -13               | -11 | -2  | -4  | -7 | -10 | -17 | -21 |

| 型号规格<br>model | 安装角度<br>blade<br>setting<br>angle | 配用功率<br>power (kW) | 转速<br>speed<br>(r/min) | 重量<br>weight (kg) |
|---------------|-----------------------------------|--------------------|------------------------|-------------------|
| 1800T6-R1     | 17.5°                             | 37                 | 980                    | 1530              |
| 1800T6-R2     | 20°                               | 45                 |                        | 1660              |
| 1800T6-R3     | 22.5°                             | 55                 | 980                    | 1720              |
|               | 25°                               |                    |                        |                   |
| 1800T6-R4     | 27.5°                             | 75                 | 980                    | 2115              |
|               | 30°                               |                    |                        |                   |
| 1800T6-R5     | 32.5°                             | 90                 | 980                    | 2210              |


型号 1900T6

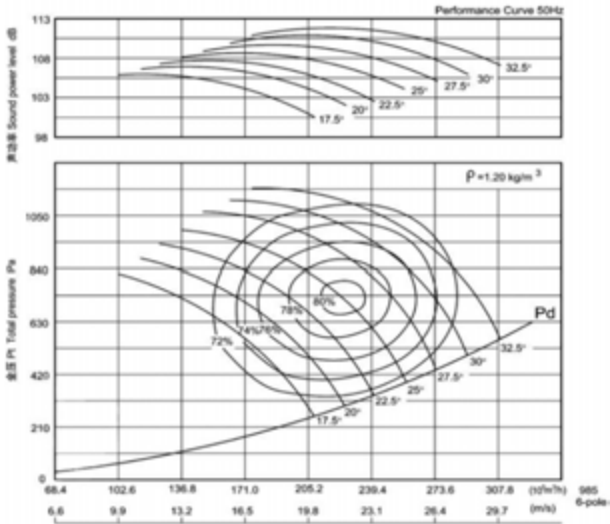

| 自由空间 Free-field (dB) |                  |     |     |     |    |     |     |     |
|----------------------|------------------|-----|-----|-----|----|-----|-----|-----|
| Speed<br>min-1       | 频率Frequency (Hz) |     |     |     |    |     |     |     |
|                      | 63               | 125 | 250 | 500 | 1K | 2K  | 4K  | 8K  |
| 985                  | -13              | -11 | -2  | -4  | -7 | -10 | -17 | -21 |

| 型号规格<br>model | 安装角度<br>blade<br>setting<br>angle | 配用功率<br>power (kW) | 转速<br>speed<br>(r/min) | 重量<br>weight (kg) |
|---------------|-----------------------------------|--------------------|------------------------|-------------------|
| 1900T6-R1     | 17.5°                             | 45                 | 980                    | 2050              |
| 1900T6-R2     | 20°                               | 55                 | 980                    | 2115              |
|               | 22.5°                             |                    |                        |                   |
| 1900T6-R3     | 25°                               | 75                 | 980                    | 2510              |
| 1900T6-R4     | 27.5°                             | 90                 | 980                    | 2600              |
| 1900T6-R5     | 30°                               | 110                | 980                    | 2670              |
| 1900T6-R6     | 32.5°                             | 132                | 980                    | 2730              |


型号 2000T6

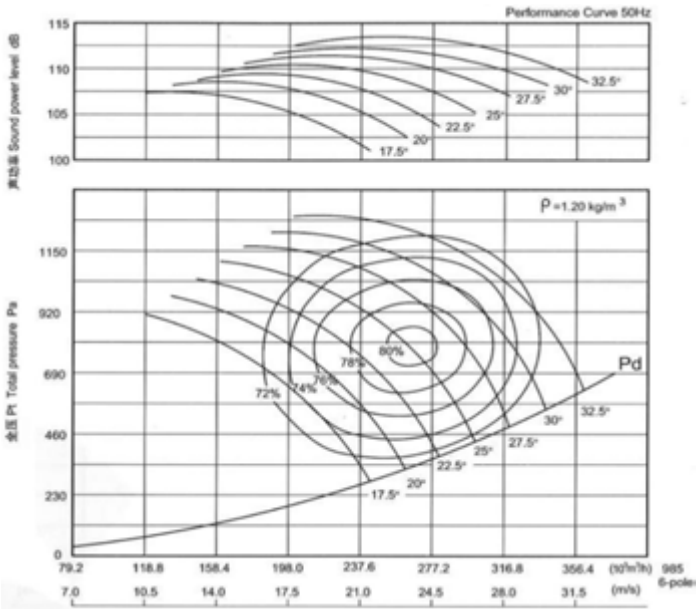

| 自由空间 Free-field (dB) |                   |     |     |     |    |     |     |     |
|----------------------|-------------------|-----|-----|-----|----|-----|-----|-----|
| Speed<br>min-1       | 频率 Frequency (Hz) |     |     |     |    |     |     |     |
|                      | 63                | 125 | 250 | 500 | 1K | 2K  | 4K  | 8K  |
| 985                  | -13               | -11 | -2  | -4  | -7 | -10 | -17 | -21 |

| 型号规格<br>model | 安装角度<br>blade<br>setting<br>angle | 配用功率<br>power (kW) | 转速<br>speed<br>(r/min) | 重量<br>weight (kg) |
|---------------|-----------------------------------|--------------------|------------------------|-------------------|
| 2000T6-R1     | 17.5°                             | 55                 | 980                    | 2475              |
| 2000T6-R2     | 20°                               | 75                 | 980                    | 2870              |
| 2000T6-R3     | 22.5°                             | 90                 | 980                    | 2950              |
| 2000T6-R4     | 25°                               | 110                | 980                    | 3030              |
|               | 27.5°                             |                    |                        |                   |
| 2000T6-R5     | 30°                               | 132                | 980                    | 3090              |
| 2000T6-R6     | 32.5°                             | 160                | 980                    | 3330              |


型号 2100T6

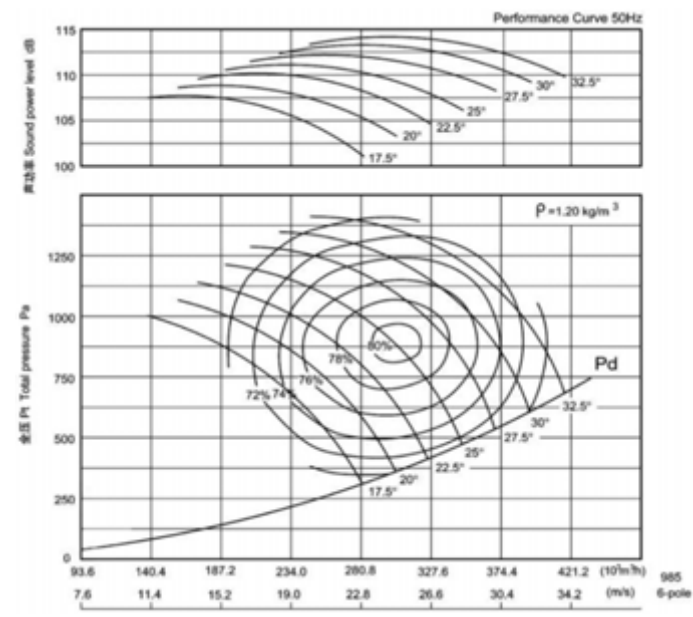

| 自由空间 Free-field (dB) |                  |     |     |     |    |     |     |     |
|----------------------|------------------|-----|-----|-----|----|-----|-----|-----|
| Speed<br>min-1       | 频率Frequency (Hz) |     |     |     |    |     |     |     |
|                      | 63               | 125 | 250 | 500 | 1K | 2K  | 4K  | 8K  |
| 980                  | -13              | -11 | -2  | -4  | -7 | -10 | -17 | -21 |

| 型号规格<br>model | 安装角度<br>blade<br>setting<br>angle | 配用功率<br>power (kW) | 转速<br>speed<br>(r/min) | 重量<br>weight (kg) |
|---------------|-----------------------------------|--------------------|------------------------|-------------------|
| 2100T6-R1     | 17.5°                             | 75                 | 980                    | 3210              |
| 2100T6-R2     | 20°                               | 90                 | 980                    | 3300              |
| 2100T6-R3     | 22.5°                             | 110                | 980                    | 3370              |
| 2100T6-R4     | 25°                               | 132                | 980                    | 3430              |
| 2100T6-R5     | 27.5°                             | 160                | 980                    | 3670              |
|               | 30°                               |                    |                        |                   |
| 2100T6-R6     | 32.5°                             | 200                | 980                    | 3720              |


型号 2200T8

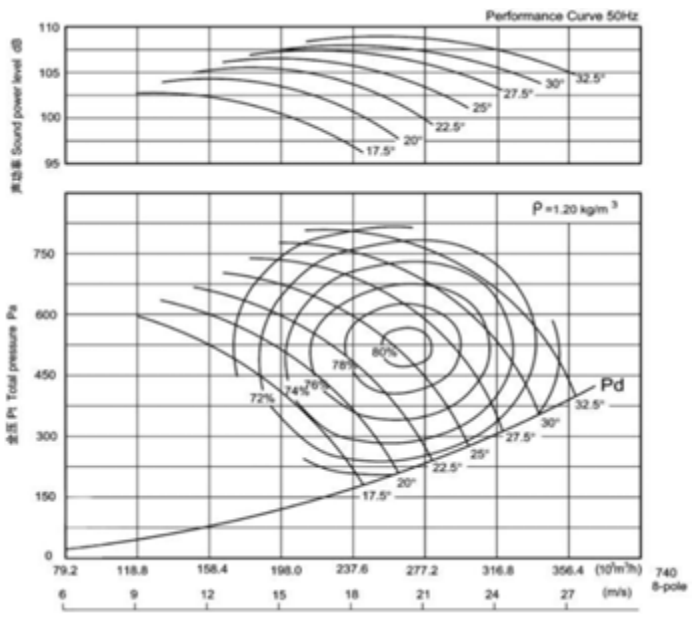

| 自由空间 Free-field (dB) |                  |     |     |     |    |     |     |     |
|----------------------|------------------|-----|-----|-----|----|-----|-----|-----|
| Speed<br>min-1       | 频率Frequency (Hz) |     |     |     |    |     |     |     |
|                      | 63               | 125 | 250 | 500 | 1K | 2K  | 4K  | 8K  |
| 740                  | -12              | -10 | -1  | -4  | -8 | -10 | -18 | -23 |

| 型号规格<br>model | 安装角度<br>blade<br>setting<br>angle | 配用功率<br>power (kW) | 转速<br>speed<br>(r/min) | 重量<br>weight (kg) |
|---------------|-----------------------------------|--------------------|------------------------|-------------------|
| 2200T8-R1     | 17.5°                             | 45                 | 740                    | 3142              |
|               | 20°                               |                    |                        |                   |
| 2200T8-R2     | 22.5°                             | 55                 | 740                    | 3550              |
|               | 25°                               |                    |                        |                   |
| 2200T8-R3     | 27.5°                             | 75                 | 740                    | 3650              |
| 2200T8-R4     | 30°                               | 90                 | 740                    | 3710              |
| 2200T8-R5     | 32.5°                             | 110                | 740                    | 3780              |


型号 2300T8

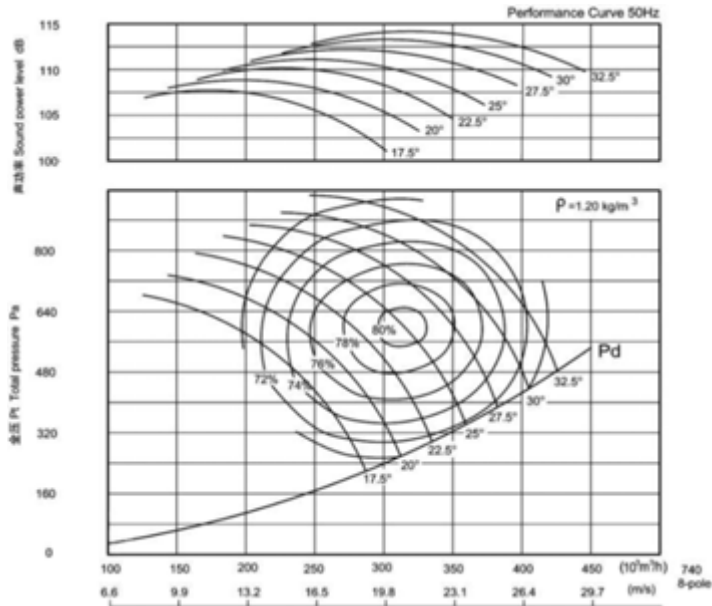

| 自由空间 Free-field (dB) |                  |     |     |     |    |     |     |     |
|----------------------|------------------|-----|-----|-----|----|-----|-----|-----|
| Speed<br>min-1       | 频率Frequency (Hz) |     |     |     |    |     |     |     |
|                      | 63               | 125 | 250 | 500 | 1K | 2K  | 4K  | 8K  |
| 740                  | -12              | -10 | -1  | -4  | -8 | -10 | -18 | -23 |

| 型号规格<br>model | 安装角度<br>blade<br>setting<br>angle | 配用功率<br>power (kW) | 转速<br>speed<br>(r/min) | 重量<br>weight (kg) |
|---------------|-----------------------------------|--------------------|------------------------|-------------------|
| 2300T8-R1     | 17.5°                             | 55                 | 740                    | 3800              |
|               | 20°                               |                    |                        |                   |
| 2300T8-R2     | 22.5°                             | 75                 | 740                    | 3900              |
| 2300T8-R3     | 25°                               | 90                 | 740                    | 3960              |
|               | 27.5°                             |                    |                        |                   |
| 2300T8-R4     | 30°                               | 110                | 740                    | 4030              |
| 2300T8-R5     | 32.5°                             | 132                | 740                    | 4800              |


型号 2400T8

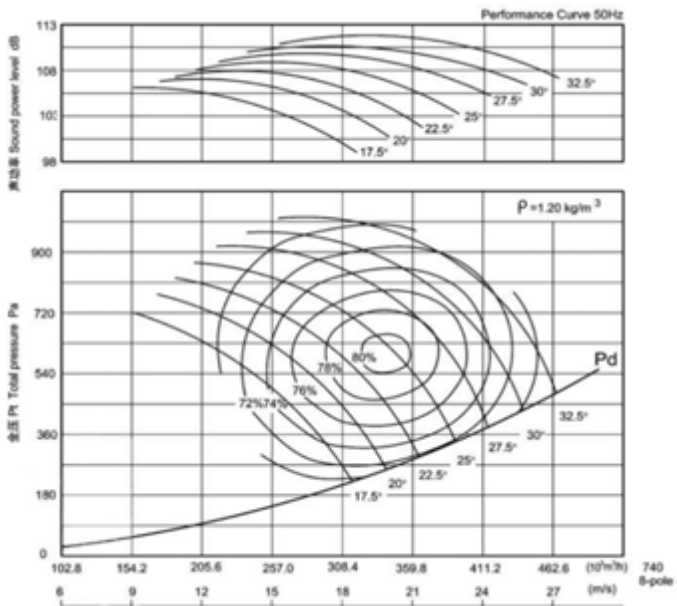

| 自由空间 Free-field (dB) |                   |     |     |     |    |     |     |     |
|----------------------|-------------------|-----|-----|-----|----|-----|-----|-----|
| Speed<br>min-1       | 频率 Frequency (Hz) |     |     |     |    |     |     |     |
|                      | 63                | 125 | 250 | 500 | 1K | 2K  | 4K  | 8K  |
| 740                  | -12               | -10 | -1  | -4  | -8 | -10 | -18 | -23 |

| 型号规格<br>model | 安装角度<br>blade<br>setting<br>angle | 配用功率<br>power (kW) | 转速<br>speed<br>(r/min) | 重量<br>weight (kg) |
|---------------|-----------------------------------|--------------------|------------------------|-------------------|
| 2400T8-R1     | 17.5°                             | 55                 | 740                    | 4050              |
| 2400T8-R2     | 20°                               | 75                 | 740                    | 4150              |
| 2400T8-R3     | 22.5°                             | 90                 | 740                    | 4210              |
|               | 25°                               |                    |                        |                   |
| 2400T8-R4     | 27.5°                             | 110                | 740                    | 4280              |
| 2400T8-R5     | 30°                               | 132                | 740                    | 5050              |
| 2400T8-R6     | 32.5°                             | 160                | 740                    | 5150              |


型号 2500T8

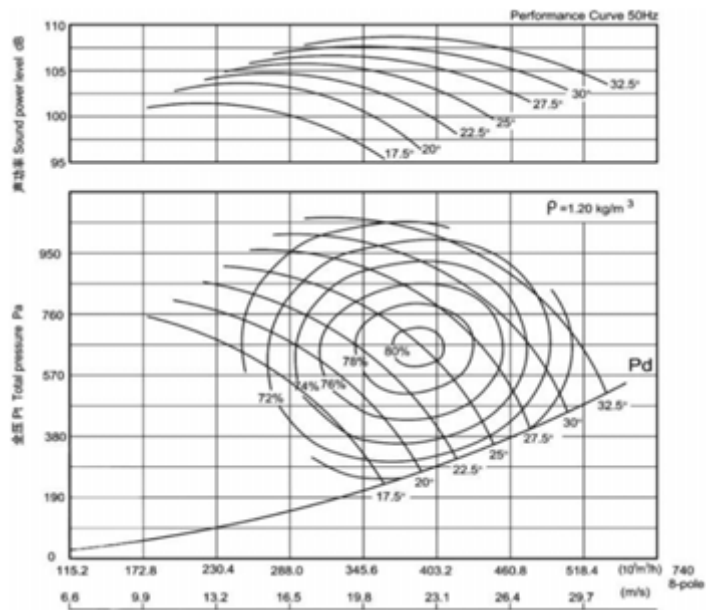

| 自由空间 Free-field (dB) |                  |     |     |     |    |     |     |     |
|----------------------|------------------|-----|-----|-----|----|-----|-----|-----|
| Speed                | 频率Frequency (Hz) |     |     |     |    |     |     |     |
| min-1                | 63               | 125 | 250 | 500 | 1K | 2K  | 4K  | 8K  |
| 740                  | -12              | -10 | -1  | -4  | -8 | -10 | -18 | -23 |

| 型号规格<br>model | 安装角度<br>blade<br>setting<br>angle | 配用功率<br>power (kW) | 转速<br>speed<br>(r/min) | 重量<br>weight (kg) |
|---------------|-----------------------------------|--------------------|------------------------|-------------------|
| 2500T8-R1     | 17.5°                             | 75                 | 740                    | 4430              |
| 2500T8-R2     | 20°                               | 90                 | 740                    | 4490              |
| 2500T8-R3     | 22.5°                             | 110                | 740                    | 4560              |
| 2500T8-R4     | 25°                               | 132                | 740                    | 5330              |
|               | 27.5°                             |                    |                        | 5330              |
| 2500T8-R5     | 30°                               | 160                | 740                    | 5480              |
| 2500T8-R6     | 32.5°                             | 185                | 740                    | 5580              |

型号 2600T8

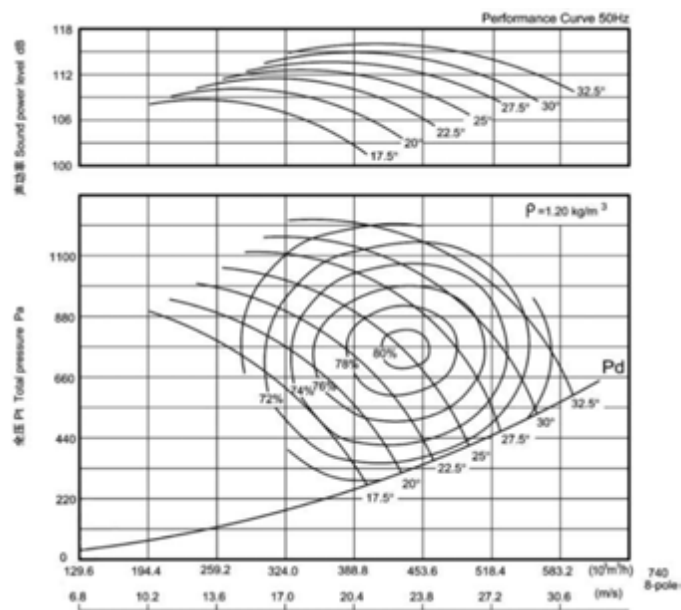

| 自由空间 Free-field (dB) |                   |     |     |     |    |     |     |     |
|----------------------|-------------------|-----|-----|-----|----|-----|-----|-----|
| Speed                | 频率 Frequency (Hz) |     |     |     |    |     |     |     |
| min-1                | 63                | 125 | 250 | 500 | 1K | 2K  | 4K  | 8K  |
| 740                  | -12               | -10 | -1  | -4  | -8 | -10 | -18 | -23 |

| 型号规格<br>model | 安装角度<br>blade<br>setting<br>angle | 配用功率<br>power (kW) | 转速<br>speed<br>(r/min) | 重量<br>weight (kg) |
|---------------|-----------------------------------|--------------------|------------------------|-------------------|
| 2600T8-R1     | 17.5°                             | 110                | 740                    | 4830              |
| 2600T8-R2     | 20°                               | 132                | 740                    | 5600              |
| 2600T8-R3     | 22.5°                             |                    |                        |                   |
| 2600T8-R4     | 25°                               | 160                | 740                    | 5815              |
|               | 27.5°                             | 185                | 740                    | 5865              |
| 2600T8-R5     | 30°                               | 220                | 740                    | 请另咨询              |
| 2600T8-R6     | 32.5°                             | 250                | 740                    |                   |

型号 2800T8

电机功率及重量


POWER&WEIGHT OF MOTOR

电机重量表

单位: Kg

| 功率<br>KW | 普通电机   |        |        |        | 防爆电机   |        |        |        |
|----------|--------|--------|--------|--------|--------|--------|--------|--------|
|          | 2 Pole | 4 Pole | 6 Pole | 8 Pole | 2 Pole | 4 Pole | 6 Pole | 8 Pole |
| 0.18     | 7      | 9      | 10     | 16     | 14     | 16     | 17     | 20     |
| 0.25     | 8      | 11     | 11     | 17     | 15     | 17     | 18     | 22     |
| 0.37     | 10     | 12     | 13     | 21     | 16     | 18     | 20     | 28     |
| 0.55     | 11     | 14     | 16     | 24     | 17     | 24     | 25     | 30     |
| 0.75     | 13     | 15.5   | 20     | 31     | 24     | 27     | 39     | 40     |
| 1.1      | 15     | 20     | 24     | 42     | 25     | 34     | 41     | 46     |
| 1.5      | 19     | 23     | 31     | 56     | 35     | 38     | 45     | 57     |
| 2.2      | 23     | 30     | 41     | 72     | 38     | 46     | 57     | 83     |
| 3        | 30     | 33     | 54     | 80     | 44     | 51     | 84     | 95     |
| 4        | 37     | 42     | 65     | 105    | 46     | 68     | 92     | 158    |
| 5.5      | 54     | 58     | 73     | 113    | 81     | 85     | 104    | 180    |
| 7.5      | 59     | 72     | 103    | 127    | 89     | 105    | 171    | 180    |
| 11       | 93     | 99     | 128    | 163    | 142    | 150    | 180    | 228    |
| 15       | 103    | 120    | 163    | 233    | 152    | 171    | 230    | 335    |
| 18.5     | 118    | 163    | 210    | 246    | 169    | 211    | 309    | 371    |
| 22       | 151    | 182    | 228    | 286    | 227    | 224    | 320    | 398    |
| 30       | 215    | 227    | 282    | 355    | 265    | 290    | 364    | 522    |
| 37       | 240    | 262    | 357    | 427    | 275    | 346    | 535    | 626    |
| 45       | 277    | 284    | 437    | 485    | 340    | 358    | 643    | 722    |
| 55       | 334    | 355    | 485    | 665    | 477    | 492    | 735    | 955    |
| 75       | 470    | 510    | 690    | 845    | 655    | 670    | 1095   | 1160   |
| 90       | 520    | 555    | 830    | 890    | 733    | 743    | 1153   | 1238   |
| 110      | 750    | 750    | 965    | 1040   | 1140   | 986    | 1330   | 1362   |
| 132      | 905    | 880    | 1010   | 1530   | 1170   | 1070   | 1485   | 1620   |
| 160      | 945    | 965    | 1610   | 1650   | 1385   | 1350   | 1610   | 1710   |
| 185      | 1060   | 1060   | 1750   | 1820   |        |        |        |        |
| 200      | 1070   | 1080   | 1750   | 1930   | 1610   | 1572   | 1750   | 1900   |
| 220      | 1400   | 1580   | 1850   |        | 1680   | 1690   | 1770   | 2000   |
| 250      | 1460   | 1630   | 1930   |        | 1720   | 1750   | 1800   |        |
| 280      | 1540   | 1680   |        |        | 1780   | 1800   | 1850   |        |
| 315      | 1700   | 1760   |        |        | 1850   | 1850   |        |        |

注：电机重量仅作参考，单位为Kg。

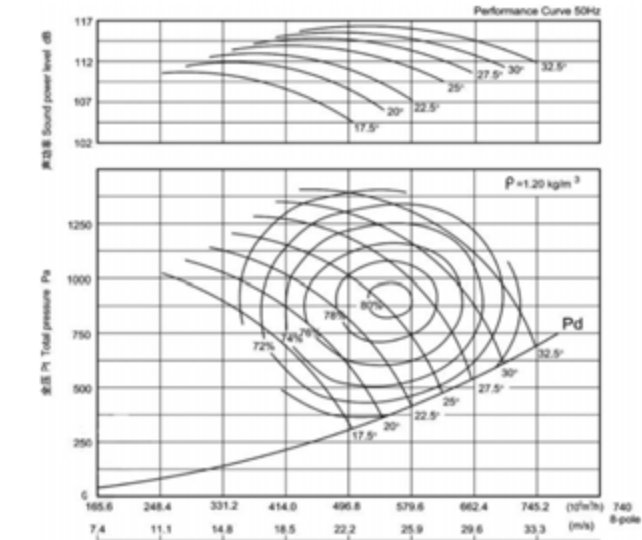

自由空间 Free-field (dB)

| Speed<br>min-1 | 频率Frequency (Hz) |     |     |     |    |     |     |     |
|----------------|------------------|-----|-----|-----|----|-----|-----|-----|
|                | 63               | 125 | 250 | 500 | 1K | 2K  | 4K  | 8K  |
| 740            | -12              | -10 | -1  | -4  | -8 | -10 | -18 | -23 |

| 型号规格<br>model | 安装角度<br>blade<br>setting<br>angle | 配用功率<br>power (kW) | 转速<br>speed<br>(r/min) | 重量<br>weight (kg) |
|---------------|-----------------------------------|--------------------|------------------------|-------------------|
| 2800T8-R1     | 17.5°                             | 200                | 740                    | 6400              |
| 2800T8-R2     | 20°                               | 185                | 740                    | 6240              |
| 2800T8-R3     | 22.5°                             | 220                | 740                    | 请另咨询              |
| 2800T8-R4     | 25°                               | 220                | 740                    |                   |
|               | 27.5°                             | 280                | 740                    |                   |
| 2800T8-R5     | 30°                               | 315                | 740                    |                   |
| 2800T8-R6     | 32.5°                             | 355                | 740                    |                   |

定转矩双速电机


| 框号   | 2/4极      |     | 4/6极      |     | 4/8极      |     | 6/8极      |     |
|------|-----------|-----|-----------|-----|-----------|-----|-----------|-----|
|      | 功率KW      | 重量  | 功率KW      | 重量  | 功率KW      | 重量  | 功率KW      | 重量  |
| 80M  | 0.45/0.55 | 17  | 0.15/0.22 | 17  |           |     |           |     |
| 80M  | 0.55/0.75 | 18  | 0.22/0.35 | 18  |           |     |           |     |
| 90S  | 0.85/1.1  | 22  | 0.65/0.85 | 25  | 0.37/0.65 | 22  | 0.35/0.45 | 21  |
| 90L  | 1.3/1.8   | 25  | 0.85/1.1  | 28  | 0.45/0.75 | 24  | 0.45/0.65 | 24  |
| 100L | 2/2.4     | 34  | 1.3/1.8   | 35  | 0.85/1.5  | 35  | 0.75/1.1  | 35  |
|      | 2.4/3     | 36  | 1.5/2.2   | 36  |           |     |           |     |
| 112M | 3.3/4     | 45  | 2.2/2.8   | 44  | 1.5/2.4   | 43  | 1.3/1.8   | 43  |
| 132S | 4.5/5.5   | 65  | 43163     | 60  | 2.2/3.3   | 59  | 1.8/2.4   | 59  |
| 132M | 6.5/8     | 71  | 4.0/5.5   | 80  | 3/4.5     | 65  | 2.6/3.7   | 65  |
| 160M | 9/11      | 125 | 6.5/8     | 124 | 5/7.5     | 123 | 4.5/6     | 122 |
| 160L | 11/14     | 137 | 9/11      | 145 | 7/11      | 144 | 6/8       | 143 |
| 180M | 15/18.5   | 179 | 11/14     | 170 |           |     | 7.5/10    | 182 |
| 180L | 18.5/22   | 191 | 13/16     | 185 | 11/17     | 216 | 9/12      | 201 |
|      |           |     |           |     | 14/22     | 240 | 12/17     | 238 |
|      |           |     |           |     | 17/26     | 260 | 15/20     | 260 |
| 200L | 26/30     | 300 | 18.5/22   | 200 |           |     |           |     |
| 225S | 32/37     | 314 | 22/28     | 295 |           |     |           |     |
| 225M | 37/45     | 341 | 26/32     | 315 | 24/34     | 340 | 24/30     | 300 |
| 250M | 45/52     | 456 | 32/42     | 389 | 30/42     | 455 |           |     |
| 280S | 60/72     | 540 | 42/55     | 490 | 40/55     | 540 |           |     |
| 280M | 72/82     | 598 | 55/67     | 540 | 47/67     | 598 |           |     |

注：电机重量仅作参考，单位为Kg。

外形及安装尺寸 ➤

SHAPE AND INSTALLATION DIMENSIONS

单向轴流风机几何尺寸（卧式）

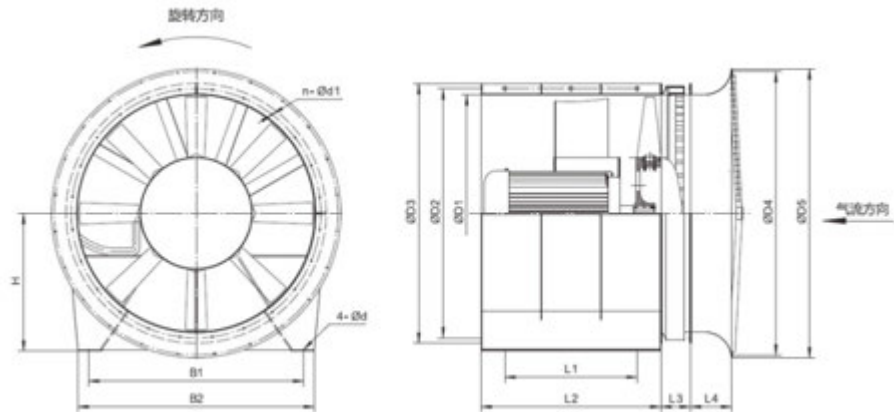

递减转矩双速电机


| 2/4极 |           |     | 4/6极 |           |     | 4/8极 |           |     | 6/8极 |           |      |
|------|-----------|-----|------|-----------|-----|------|-----------|-----|------|-----------|------|
| 框号   | 功率        | 重量  | 框号   | 功率        | 重量  | 框号   | 功率        | 重量  | 框号   | 功率        | 重量   |
| 80M  | 0.75/0.17 | 20  | 80M  | 0.37/0.11 | 20  | 80M  | 0.55/0.13 | 20  | 80M  | 0.25/0.1  | 20   |
| 90S  | 0.95/0.25 | 25  | 80M  | 0.55/0.15 | 20  | 90S  | 0.75/0.17 | 25  | 80M  | 0.37/0.11 | 20   |
| 90L  | 1.5/0.33  | 28  | 90S  | 0.75/0.22 | 25  | 90L  | 1/0.22    | 28  | 90S  | 0.55/0.15 | 25   |
| 100L | 1.9/0.4   | 35  | 90L  | 1/0.3     | 28  | 100L | 1.3/0.3   | 35  | 90L  | 0.75/0.2  | 28   |
| 112M | 3/0.6     | 45  | 100L | 1.3/0.5   | 35  | 100L | 2/0.55    | 35  | 100L | 1.1/0.37  | 35   |
| 112M | 3.5/0.7   | 45  | 100L | 2/0.6     | 35  | 100L | 2.4/0.65  | 35  | 112M | 1.5/0.55  | 45   |
| 132S | 4.4/1.1   | 60  | 112M | 3/0.8     | 45  | 112M | 3.2/0.9   | 45  | 132M | 3/1.1     | 80   |
| 132S | 6.2/1.3   | 60  | 132M | 4.7/1.5   | 80  | 132S | 4.5/1.1   | 60  | 132M | 4/1.5     | 80   |
| 160M | 8.3/1.7   | 125 | 132M | 5.62/2.47 | 80  | 132M | 6.3/1.5   | 80  | 160M | 6.5/3.2   | 125  |
| 160M | 12.5/2.8  | 125 | 132M | 6.7/2.2   | 80  | 160M | 8.9/2     | 125 | 160L | 7.5/3     | 145  |
| 160L | 16/3.2    | 145 | 160M | 7.5/3.3   | 125 | 160L | 12/2.7    | 145 | 180M | 9/4.5     | 182  |
| 180M | 19.5/4.5  | 182 | 160L | 9.5/3.1   | 145 | 180M | 16/4      | 182 | 180L | 11/3      | 216  |
| 200L | 21.5/4.7  | 260 | 160L | 12/4      | 145 | 180L | 19.5/5    | 216 | 200L | 15/3.7    | 260  |
| 200L | 26/5.2    | 260 | 180L | 15.5/5.1  | 216 | 225S | 29/7.5    | 300 | 200L | 18.5/5.5  | 260  |
| 200L | 32/8      | 260 | 200L | 18/6.2    | 260 | 225M | 40/9.5    | 340 | 225M | 22/7.5    | 340  |
| 225M | 39/10     | 340 | 200L | 24/8.5    | 260 | 250M | 52/14.5   | 380 | 250M | 25/9      | 380  |
| 225M | 42/11     | 340 | 225M | 30/10     | 340 | 280S | 65/17     | 540 | 250M | 27/10     | 380  |
| 250M | 45/13     | 380 | 250M | 37/12     | 380 |      |           |     | 280S | 30/15     | 540  |
| 280S | 55/15     | 540 | 280S | 45/15     | 540 |      |           |     | 280M | 37/15     | 598  |
| 280M | 75/25     | 598 | 280S | 55/18.5   | 540 |      |           |     | 315S | 40/15     | 1020 |
|      |           |     | 280M | 70/25     | 598 |      |           |     | 315S | 45/18.5   | 1020 |

注：电机重量仅作参考，单位为Kg。

| 型号    | D1   | D2   | D3   | D4   | D5   | L1   | L2   | L3  | L4  | H    | B1   | B2   | nxd1     | d2   |
|-------|------|------|------|------|------|------|------|-----|-----|------|------|------|----------|------|
| 1250K | 1260 | 1320 | 1390 | 1550 | 1590 | 600  | 840  | 290 | 250 | 715  | 1130 | 1250 | 16x ϕ 15 | ϕ 14 |
| 1400K | 1410 | 1470 | 1540 | 1700 | 1740 | 790  | 1030 | 300 | 250 | 800  | 1280 | 1400 | 20x ϕ 19 | ϕ 14 |
| 1500K | 1510 | 1570 | 1640 | 1800 | 1840 | 600  | 840  | 300 | 250 | 850  | 1380 | 1500 | 20x ϕ 19 | ϕ 14 |
| 1600K | 1612 | 1670 | 1740 | 2010 | 2060 | 790  | 1030 | 300 | 320 | 910  | 1480 | 1600 | 24x ϕ 19 | ϕ 18 |
| 1800K | 1812 | 1900 | 1960 | 2200 | 2250 | 820  | 1060 | 340 | 320 | 1030 | 1680 | 1800 | 24x ϕ 19 | ϕ 18 |
| 1900K | 1914 | 2000 | 2060 | 2300 | 2350 | 820  | 1060 | 340 | 320 | 1060 | 1740 | 1900 | 24x ϕ 19 | ϕ 18 |
| 2000K | 2014 | 2100 | 2160 | 2450 | 2500 | 840  | 1080 | 360 | 320 | 1120 | 1820 | 2000 | 24x ϕ 19 | ϕ 18 |
| 2100K | 2114 | 2200 | 2260 | 2550 | 2600 | 990  | 1250 | 360 | 320 | 1170 | 1920 | 2100 | 28x ϕ 24 | ϕ 18 |
| 2200K | 2216 | 2300 | 2380 | 2650 | 2700 | 990  | 1250 | 360 | 320 | 1220 | 2020 | 2200 | 28x ϕ 24 | ϕ 18 |
| 2300K | 2316 | 2400 | 2480 | 2750 | 2800 | 980  | 1250 | 420 | 320 | 1270 | 2120 | 2300 | 28x ϕ 24 | ϕ 18 |
| 2400K | 2316 | 2500 | 2580 | 2850 | 2900 | 1240 | 1500 | 420 | 400 | 1340 | 2220 | 2400 | 30x ϕ 24 | ϕ 18 |
| 2500K | 2516 | 2600 | 2680 | 2950 | 3000 | 1240 | 1500 | 420 | 400 | 1390 | 2320 | 2500 | 32x ϕ 24 | ϕ 18 |
| 2600K | 2618 | 2720 | 2800 | 3050 | 3100 | 1540 | 1800 | 450 | 400 | 1450 | 2420 | 2600 | 36x ϕ 24 | ϕ 18 |
| 2800K | 2820 | 2920 | 3000 | 3250 | 3300 | 1540 | 1800 | 450 | 400 | 1550 | 2620 | 2800 | 36x ϕ 24 | ϕ 18 |

注：重量单位为不含电机重量，单位 Kg。


单向轴流风机几何尺寸（立式）

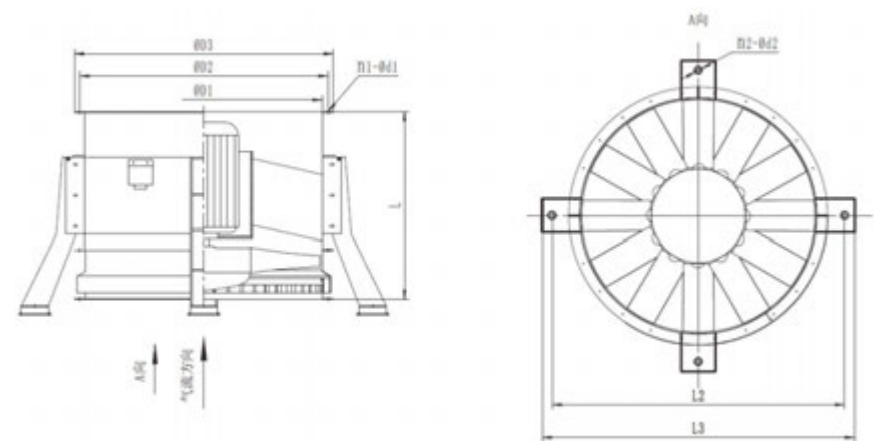

| 型号    | D1   | D2   | D3   | L    | L2   | L3   | n1xd1    | n2xd2   |
|-------|------|------|------|------|------|------|----------|---------|
| 1250K | 1260 | 1320 | 1390 | 1130 | 1610 | 1690 | 16x φ 15 | 4x φ 14 |
| 1400K | 1410 | 1470 | 1540 | 1330 | 1760 | 1840 | 20x φ 19 | 4x φ 14 |
| 1500K | 1510 | 1570 | 1640 | 1140 | 1860 | 1940 | 20x φ 19 | 4x φ 14 |
| 1600K | 1612 | 1670 | 1740 | 1330 | 1960 | 2040 | 24x φ 19 | 4x φ 14 |
| 1800K | 1812 | 1900 | 1960 | 1400 | 2180 | 2260 | 24x φ 19 | 4x φ 14 |
| 1900K | 1914 | 2000 | 2060 | 1400 | 2280 | 2360 | 24x φ 19 | 4x φ 14 |
| 2000K | 2014 | 2100 | 2160 | 1440 | 2380 | 2460 | 24x φ 19 | 4x φ 14 |
| 2100K | 2114 | 2200 | 2260 | 1610 | 2480 | 2560 | 28x φ 24 | 4x φ 14 |
| 2200K | 2216 | 2300 | 2380 | 1610 | 2600 | 2680 | 28x φ 24 | 4x φ 14 |
| 2300K | 2316 | 2400 | 2480 | 1670 | 2700 | 2780 | 28x φ 24 | 4x φ 14 |
| 2400K | 2316 | 2500 | 2580 | 1920 | 2800 | 2880 | 30x φ 24 | 4x φ 14 |
| 2500K | 2516 | 2600 | 2680 | 1920 | 2900 | 2980 | 32x φ 24 | 4x φ 14 |
| 2600K | 2618 | 2720 | 2800 | 2250 | 3020 | 3100 | 36x φ 24 | 6x φ 14 |
| 2800K | 2820 | 2920 | 3000 | 2250 | 3220 | 3300 | 36x φ 24 | 6x φ 14 |

注：重量单位为不含电机重量，单位 Kg。


双向轴流风机几何尺寸（卧式）

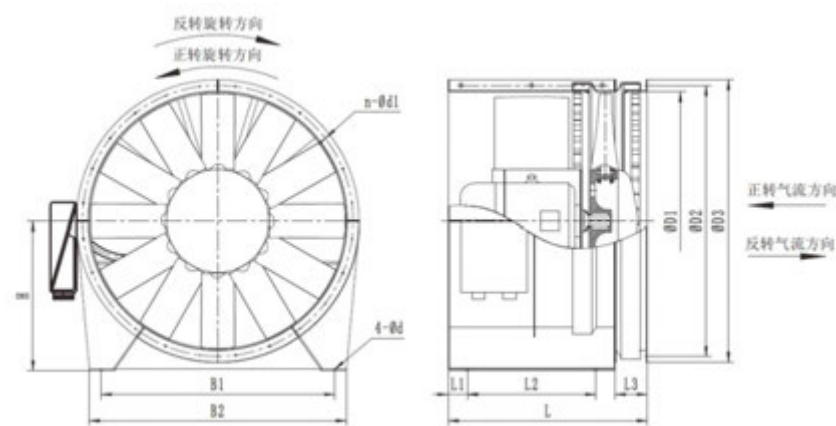

| 型号    | D1   | D2   | D3   | L    | L2   | L3  | H    | B1   | B2   | n1xd1    | d2   |
|-------|------|------|------|------|------|-----|------|------|------|----------|------|
| 1250T | 1260 | 1320 | 1390 | 1115 | 720  | 195 | 715  | 1130 | 1250 | 16x φ 15 | φ 14 |
| 1400T | 1410 | 1470 | 1540 | 1325 | 890  | 195 | 800  | 1280 | 1400 | 20x φ 19 | φ 14 |
| 1500T | 1510 | 1570 | 1640 | 1185 | 740  | 205 | 850  | 1380 | 1500 | 20x φ 19 | φ 14 |
| 1600T | 1612 | 1670 | 1740 | 1185 | 740  | 205 | 910  | 1480 | 1500 | 24x φ 19 | φ 18 |
| 1800T | 1812 | 1900 | 1960 | 1470 | 1010 | 220 | 1030 | 1680 | 1800 | 24x φ 19 | φ 18 |
| 1900T | 1914 | 2000 | 2060 | 1470 | 1010 | 220 | 1060 | 1740 | 1900 | 24x φ 19 | φ 18 |
| 2000T | 2014 | 2100 | 2160 | 1470 | 1010 | 220 | 1120 | 1820 | 2000 | 24x φ 19 | φ 18 |
| 2100T | 2114 | 2200 | 2260 | 1680 | 1220 | 220 | 1170 | 1920 | 2100 | 28x φ 24 | φ 18 |
| 2200T | 2216 | 2300 | 2380 | 1470 | 1010 | 220 | 1220 | 2020 | 2200 | 28x φ 24 | φ 18 |
| 2300T | 2316 | 2400 | 2480 | 1680 | 1220 | 220 | 1270 | 2120 | 2300 | 28x φ 24 | φ 18 |
| 2400T | 2416 | 2500 | 2580 | 1680 | 1220 | 220 | 1340 | 2220 | 2400 | 32x φ 24 | φ 18 |
| 2500T | 2516 | 2600 | 2680 | 1680 | 1220 | 220 | 1390 | 2320 | 2500 | 32x φ 24 | φ 18 |
| 2600T | 2618 | 2720 | 2800 | 1680 | 1220 | 220 | 1450 | 2420 | 2600 | 36x φ 24 | φ 18 |
| 2800T | 2820 | 2920 | 3000 | 1680 | 1220 | 220 | 1550 | 2620 | 2800 | 36x φ 24 | φ 18 |

注：重量单位为不含电机重量，单位 Kg。

双向轴流风机几何尺寸（立式）

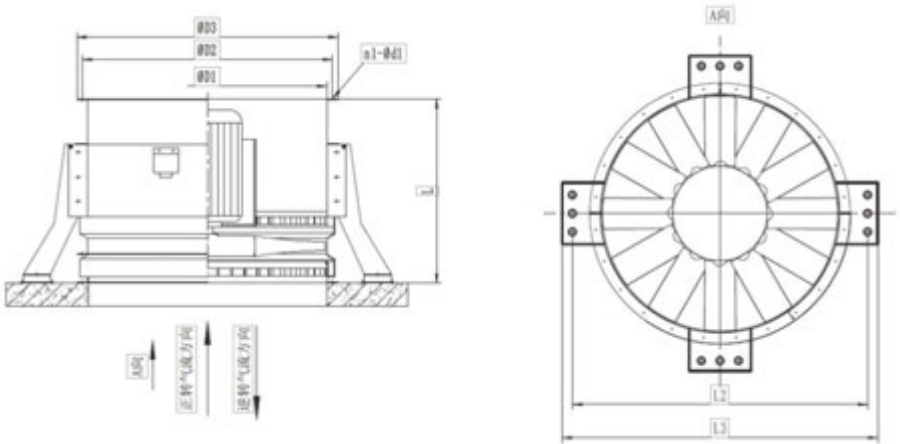

| 型号    | D1   | D2   | D3   | L    | L2   | L3   | n1xd1    | n2xd2   |
|-------|------|------|------|------|------|------|----------|---------|
| 1250T | 1260 | 1320 | 1390 | 1115 | 1610 | 1690 | 16x φ 15 | 4x φ 14 |
| 1400T | 1410 | 1470 | 1540 | 1325 | 1760 | 1840 | 20x φ 19 | 4x φ 14 |
| 1500T | 1510 | 1570 | 1640 | 1185 | 1860 | 1940 | 20x φ 19 | 4x φ 14 |
| 1600T | 1612 | 1670 | 1740 | 1185 | 1960 | 2040 | 24x φ 19 | 4x φ 14 |
| 1800T | 1812 | 1900 | 1960 | 1470 | 2180 | 2260 | 24x φ 19 | 4x φ 14 |
| 1900T | 1914 | 2000 | 2060 | 1470 | 2280 | 2360 | 24x φ 19 | 4x φ 14 |
| 2000T | 2014 | 2100 | 2160 | 1470 | 2380 | 2460 | 24x φ 19 | 4x φ 14 |
| 2100T | 2114 | 2200 | 2260 | 1680 | 2480 | 2560 | 28x φ 24 | 4x φ 14 |
| 2200T | 2216 | 2300 | 2380 | 1470 | 2600 | 2680 | 28x φ 24 | 4x φ 14 |
| 2300T | 2316 | 2400 | 2480 | 1680 | 2700 | 2780 | 28x φ 24 | 4x φ 14 |
| 2400T | 2416 | 2500 | 2580 | 1680 | 2800 | 2880 | 32x φ 24 | 4x φ 14 |
| 2500T | 2516 | 2600 | 2680 | 1680 | 2900 | 2980 | 32x φ 24 | 4x φ 14 |
| 2600T | 2618 | 2720 | 2800 | 1680 | 3020 | 3100 | 36x φ 24 | 6x φ 14 |
| 2800T | 2820 | 2920 | 3000 | 1680 | 3220 | 3300 | 36x φ 24 | 6x φ 14 |

注：重量单位为不含电机重量，单位 Kg。

## 技术规范

### TECHNIAL SPECIFICATION

#### 叶轮 /Impeller

铸铝叶轮与轮毂应符合GB/T 9438要求并进行平衡校正，其平衡等级不低于G6.3，叶轮按JB/T 6445的规定进行 超速实验；

The cast aluminum Impeller and hub shall be balanced according to GB/T 9438, and the balance grade shall not be lower than G6.3, The impeller should be overspeed tested according to JB/T 6445.

所有的叶片、轮毂应进行无损检测，或按合同规定方法检测；

All blades and hubs shall be did Non-Destructive Testing, or inspected in accordance with the contract method.

风机叶片安装角停机可调，叶片的调节应无须拆下叶轮，叶轮的轮毂比不得大于0.4；

The installation Angle of the fan blade can be adjusted. The adjustment of the blade should not require the impeller to be removed. The hub ratio of the impeller should not be greater than 0.4.

叶轮与风筒单侧间隙应在叶轮直径的0.15%–0.35%之间，但不得少于2.5mm。

The unilateral clearance between the impeller and the air duct should be between 0.15%–0.35% of the impeller diameter, but not less than 2.5mm.

#### 电机 /Motor

电动机轴承采用密封油脂润滑，在环境温度–40℃至60℃、相对湿度不大于95%的条件下可正常运行20000h；

The motor bearings are lubricated by seal grease and can operate normally for 20000h at ambient temperature of –40℃ to 60℃ and relative humidity of no more than 95%.

电动机防护等级应不低于IP54；

The protection grade of the motor shall not be lower than Ip54;

电动机在300℃的温度下应能带负荷运转120min；

The motor should be able to run with energy band load for 120min at the temperature of 300℃.

电动机的接线盒在主风筒壳体外，接线盒与电动机通过刚性或柔性导管联接；

The junction box of the motor is outside the main duct housing, and the junction box is connected with the motor by rigid or flexible conduit.

电机需要带前、后轴承测温装置，带三相绕组测温装置；

The motor shall be equipped with a temperature measuring device for front and rear bearing and a temperature measuring device for three-phase winding.

电机注油管、排油管应引至筒体外部并采用无缝铜管，注油嘴和排油阀应采用铜质材料；

Motor oil injection pipe and oil discharge pipe should be led to the outside of the barrel and adopt seamless copper pipe. Oil injection nozzle and oil discharge valve should adopt copper material.

风机所选电机在额定输出功率和75%额定输出功率的效率均不应低于《中小型三相异步电动机能效限定值及能效等级》GB18613–2006中规定电动机能效限定值。

The rated output power and the efficiency of 75% rated output power of the motor selected by the fan shall not be lower than the energy efficiency limit value of the motor specified in gb18613–2006.

#### 机壳 /Case

主风筒壁厚不低于4mm，法兰厚度不低于4mm；

The thickness of case shall not be less than 4mm, and the thickness of flange shall not be less than 4mm;

主风筒材质以镀锌钢为主，防腐轴流风机的风筒材质采用相当厚度的钢板并进行防腐涂装；

The case is mainly made of galvanized steel, and the air duct of anti-corrosion axial flow fan is made of steel plate of considerable thickness and anti-corrosion coating;

主风筒应设置不少于2个数量的吊耳。

The case shall be provided with no less than 2 lifting lugs.

整流罩 /Fairing

铸铝叶轮与轮毂应符合GB/T 9438要求并进行平衡校正，其平衡等级不低于G6.3，叶轮按JB/T 6445的规定进行超速实验；  
The cast aluminum Impeller and hub shall be balanced according to GB/T 9438, and the balance grade shall not be lower than G6.3, The impeller should be overspeed tested according to JB/T 6445；  
所有的叶片、轮毂应进行无损伤检测，或按合同规定方法检测；  
All blades and hubs shall be did Non–Destructive Testing, or inspected in accordance with the contract method；  
风机叶片安装角停机可调，叶片的调节应无须拆下叶轮，叶轮的轮毂比不得大于0.4；  
The installation Angle of the fan blade can be adjusted. The adjustment of the blade should not require the impeller to be removed. The hub ratio of the impeller should not be greater than 0.4；

防喘振装置 /Anti-surge devices

风机动叶片进气侧加设防喘振装置，防喘振装置是一环形的带有若干小导流片的装置。可逆转式轴流风机叶轮两端均应设置防喘振装置。  
Anti–surge device is installed on the air intake side of the wind–powered blade. The anti–surge device is a ring device with several small guide plates.Anti–surge devices should be installed at both ends of the impeller of reversible axial flow fan.

安装支架 /Mounting bracket

安装支架应采用优质型钢焊接而成，应具有足够的强度和刚度；  
The mounting bracket shall be welded with high quality section steel with sufficient strength and stiffness.

状态监控装置 /Status monitoring device

智能风机安全监测管理系统除振动传感器以外应在风机及支架设置其他监测传感器，在风机停止或运行状态下均可实时对风机、支架、螺栓等各部件振动与松动安全监测。螺栓松动、支架松动、风机松动为主要安全监测范围；  
In addition to vibration sensors, other monitoring sensors should be installed in the intelligent fan safety monitoring management system and in the fan and bracket, so that the safety monitoring of vibration and loosening of the fan, bracket, bolt and other components can be conducted in real time when the fan is stopped or running.Bolt loosening, support loosening and fan loosening are the main safety monitoring areas.  
智能风机安全监测管理系统在风机非运行状态下能检测故障状态，实时差异化监测、分析与判别松动等功能；  
The intelligent fan safety monitoring and management system can detect the fault state when the fan is not in operation, and perform real–time differential monitoring, analysis and identification of looseness.  
能风机安全监测管理系统具有以太网或现场总线通讯功能，可通过通讯实时上传风机振动值；  
The safety monitoring and management system of the fan has Ethernet or fieldbus communication function, and the vibration value of the fan can be uploaded in real time through communication.  
智能风机安全监测管理系统具备故障特征专家库，具有危险模型特征自学习功能，可对实际特定危险工况进行学习和管理；  
The intelligent fan safety monitoring and management system has an expert library of fault features and a self–learning function of hazard model features, which can be used to learn and manage specific dangerous working conditions.

