


型号说明

MODEL DESCRIPTION

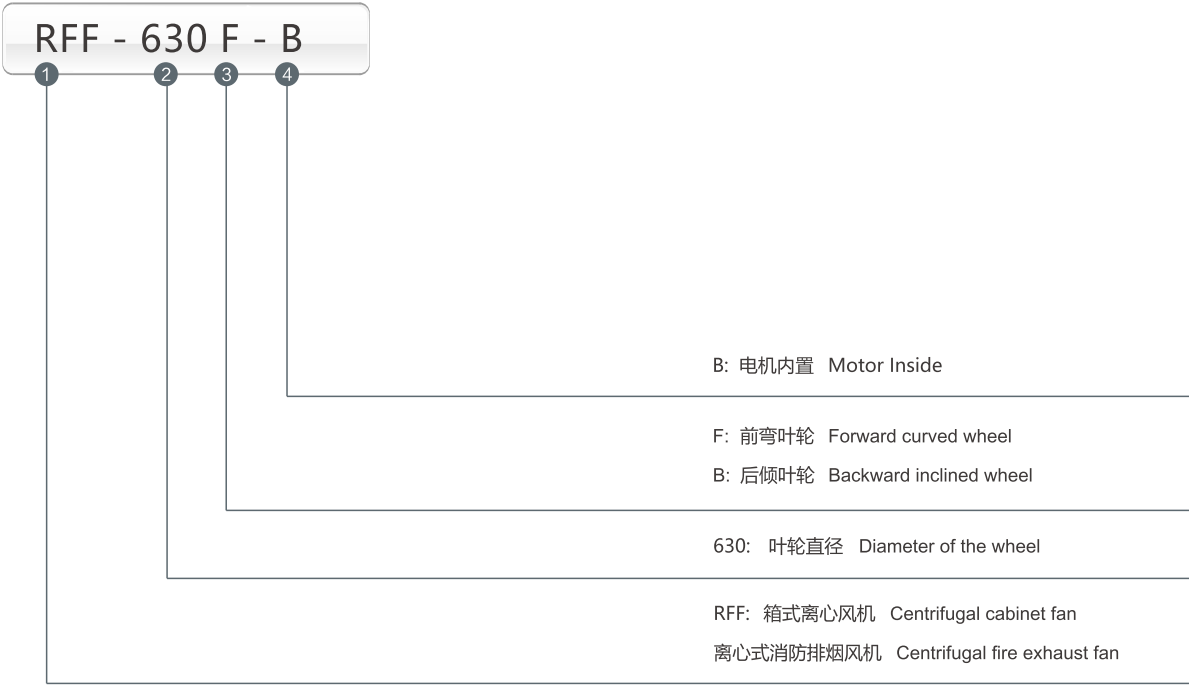

认证和规范

CERTIFICATES AND REGULATIONS

离心风机箱按JB/T10563-2006《一般用途离心通风机技术条件》检验, 常规性能符合标准要求。按照XF211-2009《消防排烟风机耐高温试验方法》检验, 在主风道介质温度为280℃时连续运行30分钟以上, 耐高温性能符合标准要求, 检验合格。

centrifugal cabinet fan meets with JB/T10563-2006 General Usage Centrifugal Fan Technical Specification. The conventional features conform to the standard requirements. The fan is tested according to the National Standard GA211-2009 High Temperature Testing Method for Fire Protection Smoke Exhaust Fan , which regulates the fan shall run continuously over 30 minutes when the air temperature in the main air duct is 280 . The fan conforms to the requirement of the standard.

离心风机箱符合国际《汽车库, 修车库, 停车库设计防火规范》(GB50067-2014)的需要, 可作为上述场合机械排烟和通风两用风机。

centrifugal cabinet fan meets with GB50067-2014 《Codes of Fire Protection For Designing Car storage warehouse, Garage, Car park”》, so it can be used for these applications as two usage fan of mechanical smoke exhaust and normal ventilation.

技术参数

TECHNICAL PARAMETERS

RFF-250B-B

叶轮直径 Wheel Diameter: 250 mm


叶轮形式 Wheel type:

后倾 Backward inclined

最大转速 Max RPM: 3800 RPM

最大风量 Max Volume: 7500 m³/h

最大静压 Max SP: 1500 Pa

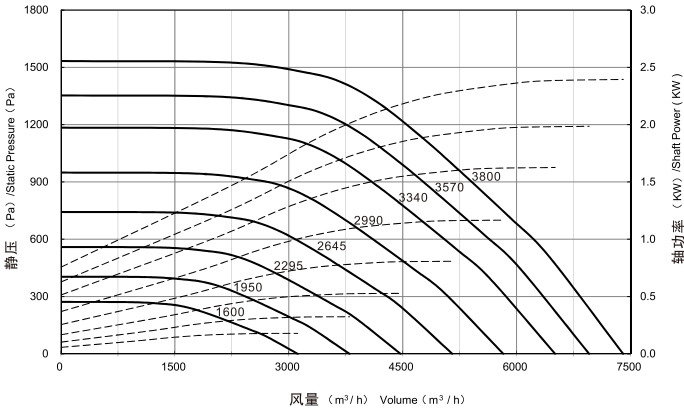

转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor	转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor
RPM	CMH	Pa	Pa	dB(A)	KW	KW	RPM	CMH	Pa	Pa	dB(A)	KW	KW
1600	935	274	270	50	0.11	0.18	2990	1748	958	945	63	0.71	1.1
	1365	269	261	50	0.14			2552	939	911	63	0.89	
	1568	262	251	51	0.15			2931	914	877	64	0.97	
	1771	245	232	52	0.16	0.25		3310	856	809	65	1.03	1.5
	1990	220	203	54	0.17			3720	766	707	67	1.08	
	2182	194	174	55	0.17			4078	680	609	68	1.12	
	2494	153	126	56	0.18			4660	533	440	69	1.15	
1950	1140	408	402	54	0.20	0.37	3340	1952	1195	1179	66	0.99	2.2
	1664	400	388	54	0.25			2850	1172	1137	66	1.25	
	1912	389	373	55	0.27			3274	1141	1095	67	1.35	
	2159	364	344	56	0.29			3698	1068	1009	68	1.44	
	2426	326	301	58	0.30			4155	956	882	70	1.51	
	2659	289	259	59	0.31			4555	848	759	71	1.55	
2295	3039	227	187	60	0.32	0.55	3570	5206	664	548	72	1.60	3
	1341	564	556	58	0.32			2087	1366	1347	67	1.21	
	1959	553	537	58	0.40	3047		1339	1299	67	1.52		
	2250	539	517	59	0.44	3500		1302	1250	68	1.65		
	2541	505	477	60	0.47	0.75		3952	1220	1153	69	1.76	
	2855	452	417	62	0.49			4441	1092	1008	71	1.84	
	3130	400	358	63	0.50			4869	968	867	72	1.90	
3577	314	259	64	0.52	5564		760	627	73	1.95			
2645	1546	749	739	61	0.49	1.1	3800	2221	1547	1526	69	1.46	
	2257	735	713	61	0.62			3243	1517	1472	69	1.84	
	2593	715	686	62	0.67			3725	1476	1417	70	1.99	
	2928	670	633	63	0.71			4207	1382	1306	71	2.12	
	3291	599	553	65	0.75			4727	1238	1142	73	2.22	
	3607	532	476	66	0.77			5182	1098	983	74	2.29	
	4123	417	344	67	0.79		5923	860	710	75	2.36		



RFF-280B-B

叶轮直径 Wheel Diameter: 280 mm


叶轮形式 Wheel type:

后倾 Backward inclined

最大转速 Max RPM: 3400 RPM

最大风量 Max Volume: 9000 m³/h

最大静压 Max SP: 1500 Pa

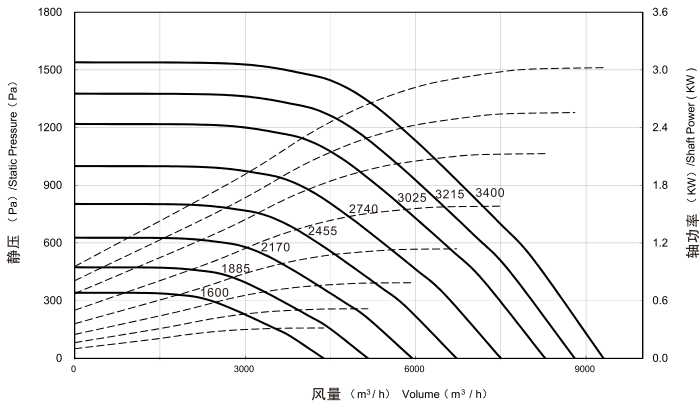

RFF-315B-B

叶轮直径 Wheel Diameter: 315 mm


叶轮形式 Wheel type:

后倾 Backward inclined

最大转速 Max RPM: 3200 RPM

最大风量 Max Volume: 12000 m³/h

最大静压 Max SP: 1800 Pa

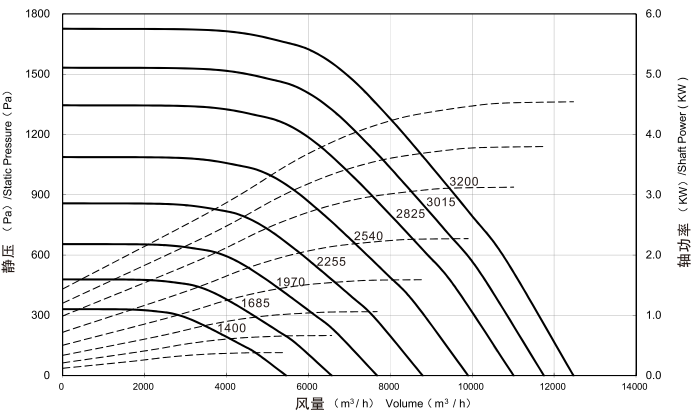

转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor	转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor
RPM	CMH	Pa	Pa	dB(A)	KW	KW	RPM	CMH	Pa	Pa	dB(A)	KW	KW
1600	1314	344	339	53	0.19	0.25	2740	2250	1009	995	65	0.97	1.5
	1918	337	327	53	0.24	3285		990	960	65	1.21		
	2204	328	315	54	0.26	3774		963	924	66	1.32		
	2489	308	291	55	0.28	4262		902	852	67	1.40		
	2796	275	254	57	0.29	4789		808	745	69	1.47		
	3066	245	219	58	0.30	5250		717	641	70	1.51		
	3504	192	158	59	0.31	6000		562	463	71	1.56		
1885	1548	478	471	57	0.31	0.55	3025	2484	1230	1213	67	1.30	2.2
	2260	468	454	57	0.39			3627	1206	1170	67	1.63	
	2596	455	437	58	0.43			4166	1174	1126	68	1.77	
	2932	427	403	59	0.46			4705	1099	1038	69	1.88	
	3295	383	353	61	0.48			5287	985	908	71	1.98	
	3612	339	303	62	0.49			5796	873	781	72	2.04	3
	4128	266	219	63	0.51			6624	684	564	73	2.10	
2170	1782	633	624	60	0.48	0.75	3215	2640	1389	1370	68	1.56	2.2
	2602	621	602	60	0.60			3855	1363	1322	68	1.96	
	2989	604	580	61	0.65			4428	1326	1272	69	2.12	
	3375	565	534	62	0.70			5001	1242	1173	70	2.26	3
	3793	506	467	64	0.73			5619	1112	1026	72	2.37	
	4158	449	402	65	0.75			6160	987	883	73	2.44	
	4752	352	290	66	0.77			7040	773	637	74	2.52	
2455	2016	810	799	63	0.69	1.1	3400	2792	1553	1532	70	1.84	
	2944	795	771	63	0.87			4077	1524	1478	70	2.32	
	3381	773	742	64	0.95			4682	1483	1423	71	2.51	
	3818	724	684	65	1.01			5288	1389	1312	72	2.67	
	4291	648	598	67	1.06			5943	1244	1147	74	2.81	4
	4704	576	515	68	1.09			6515	1103	987	75	2.89	
	5376	451	372	69	1.12			7445	865	713	76	2.98	

转速	风量	全压	静压	噪音	轴功率	电机功率	转速	风量	全压	静压	噪音	轴功率	电机功率
RPM	CMH	Pa	Pa	dB(A)	KW	KW	RPM	CMH	Pa	Pa	dB(A)	KW	KW
1400	1637	334	329	54	0.23	0.37	2540	2970	1097	1082	67	1.39	2.2
	2390	327	317	54	0.29			4336	1077	1044	67	1.74	
	2745	318	305	55	0.32			4981	1048	1005	68	1.89	
	3100	299	282	56	0.34			5625	982	927	69	2.01	
	3484	267	246	58	0.35			6321	880	810	71	2.11	
	3819	237	212	59	0.36			6929	781	697	72	2.17	
	4365	186	153	60	0.37			7919	613	504	73	2.24	
1685	1970	483	476	58	0.40	0.55	2825	3303	1358	1339	69	1.91	2.2
	2877	473	459	58	0.51			4823	1333	1292	69	2.39	
	3304	461	442	59	0.55			5539	1296	1243	70	2.60	
	3732	432	408	60	0.59			6256	1214	1146	71	2.76	
	4193	388	357	62	0.62			7030	1088	1002	73	2.90	
	4597	344	307	63	0.63			7707	966	862	74	2.99	
	5254	270	222	64	0.65			8808	758	623	75	3.08	
1970	2303	660	651	61	0.65	0.75	3015	3525	1547	1525	71	2.32	3
	3363	648	628	61	0.81			5147	1517	1471	71	2.91	
	3863	631	605	62	0.88			5912	1477	1416	72	3.16	
	4363	590	557	63	0.94			6677	1384	1306	73	3.36	
	4903	529	487	65	0.98			7503	1240	1142	75	3.53	
	5374	469	419	66	1.01			8225	1100	982	76	3.63	
	6142	369	303	67	1.04			9400	864	710	77	3.74	
2255	2637	865	853	64	0.97	1.1	3200	3741	1742	1718	72	2.77	4
	3850	849	823	64	1.22			5463	1709	1657	72	3.48	
	4422	826	792	65	1.32			6275	1664	1595	73	3.77	
	4994	773	730	66	1.41			7087	1559	1471	74	4.02	
	5612	694	639	68	1.48			7963	1397	1286	76	4.22	
	6152	615	549	69	1.52			8730	1240	1107	77	4.34	
	7031	483	397	70	1.56			9977	972	799	78	4.47	



RFF-355B-B

叶轮直径 **Wheel Diameter:** 355 mm


叶轮形式 **Wheel type:**

后倾 Backward inclined

最大转速 **Max RPM:** 3000 RPM

最大风量 **Max Volume:** 16000 m³/h

最大静压 **Max SP:** 2000 Pa

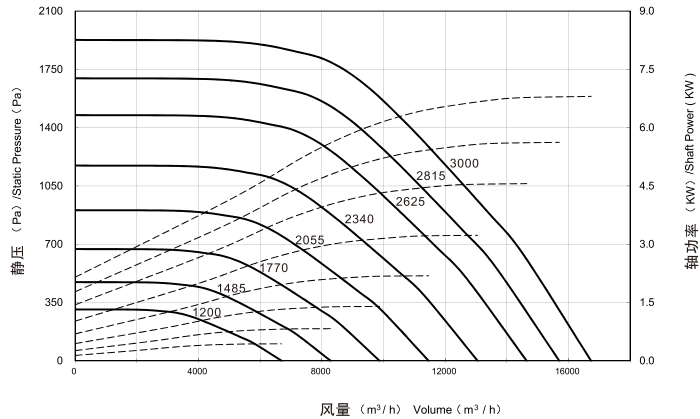

转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor	转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor
RPM	CMH	Pa	Pa	dB(A)	KW	KW	RPM	CMH	Pa	Pa	dB(A)	KW	KW
1200	2008	311	307	54	0.27	0.37	2340	3916	1184	1167	69	1.97	2.2
	2932	305	296	54	0.33			5718	1161	1125	69	2.47	3
	3368	297	285	55	0.36			6568	1131	1083	70	2.68	
	3804	279	263	56	0.39			7418	1060	999	71	2.86	4
	4275	250	230	58	0.40			8335	950	873	73	3.00	
	4686	222	198	59	0.42			9138	844	752	74	3.09	
5355	175	143	60	0.43	10443	663	543	75	3.18				
1485	2485	477	470	59	0.50	0.55	2625	4393	1489	1468	71	2.78	5.5
	3629	468	453	59	0.63			6414	1461	1416	71	3.49	
	4168	455	436	60	0.69	7368		1423	1363	72	3.79	5.5	
	4707	426	402	61	0.73	8321		1333	1257	73	4.03		
	5290	383	352	63	0.77	9350		1195	1099	75	4.23		
	5799	340	303	64	0.79	10251		1062	946	76	4.36		
1770	6627	267	219	65	0.81	1.1	2815	11715	834	683	77	4.49	4
	2962	677	667	63	0.85			4711	1712	1688	73	3.43	
	4325	665	644	63	1.07	6879		1681	1629	73	4.31	5.5	
	4968	647	620	64	1.16	7901		1637	1568	74	4.67		
	5611	607	572	65	1.24	8923		1534	1446	75	4.97		
	6305	544	500	67	1.30	10027		1375	1264	77	5.22	7.5	
6912	483	430	68	1.34	10993	1221	1088	78	5.37				
2055	7899	380	311	69	1.38	1.5	3000	12563	960	786	79	5.53	7.5
	3439	913	900	66	1.33			5021	1945	1917	74	4.15	
	5022	896	868	66	1.68	7331		1909	1850	74	5.21	7.5	
	5768	872	835	67	1.82	8420		1859	1781	75	5.65		
	6514	817	770	68	1.93	9510		1742	1642	76	6.02		
	7320	733	674	70	2.03	10686		1562	1436	78	6.32		
3	8025	651	580	71	2.09	11715	1386	1235	79	6.50			
	9171	512	419	72	2.15	13389	1089	892	80	6.70			

RFF-400B-B

叶轮直径 **Wheel Diameter:** 400 mm


叶轮形式 **Wheel type:**

后倾 Backward inclined

最大转速 **Max RPM:** 2800 RPM

最大风量 **Max Volume:** 22000 m³/h

最大静压 **Max SP:** 2200 Pa

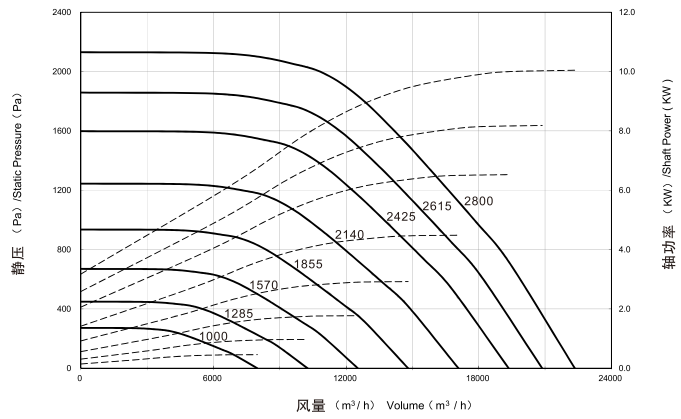

转速	风量	全压	静压	噪音	轴功率	电机功率	转速	风量	全压	静压	噪音	轴功率	电机功率
RPM	CMH	Pa	Pa	dB(A)	KW	KW	RPM	CMH	Pa	Pa	dB(A)	KW	KW
1000	2394	274	270	54	0.28	0.37	2140	5123	1257	1239	70	2.74	4
	3496	270	261	54	0.35			7481	1234	1195	70	3.44	
	4015	262	251	55	0.38			8592	1202	1150	71	3.73	
	4535	246	232	56	0.40			9704	1127	1061	72	3.97	
	5096	221	203	58	0.43			10905	1010	927	74	4.17	
	5586	196	174	59	0.44			11954	898	798	75	4.29	
	6384	155	126	60	0.45			13662	707	576	76	4.41	
	3076	454	447	59	0.59	0.75	2425	5806	1615	1591	73	3.98	7.5
1285	4492	445	431	59	0.74			8477	1585	1535	73	5.00	
	5159	434	415	60	0.81			9737	1543	1477	74	5.42	
	5827	406	382	61	0.86			10997	1447	1362	75	5.77	
	6548	364	334	63	0.90			12357	1298	1191	77	6.06	
	7178	324	288	64	0.93			13546	1154	1025	78	6.24	
	8204	255	208	65	0.96			15482	908	740	79	6.42	
	3759	677	667	64	1.08	1.5	2615	6261	1877	1850	75	4.99	5.5
1570	5488	664	643	64	1.36			9141	1844	1785	75	6.27	
	6304	647	619	65	1.47			10500	1795	1718	76	6.80	
	7119	607	571	66	1.57			11858	1683	1584	77	7.24	
	8000	544	499	68	1.65			13325	1509	1385	79	7.60	
	8770	483	429	69	1.69			14608	1342	1192	80	7.82	
	10023	380	310	70	1.74			16695	1056	861	81	8.06	
1855	4441	945	931	67	1.78	2.2	2800	6703	2152	2121	76	6.13	7.5
	6484	927	898	67	2.24			9788	2113	2046	76	7.70	
	7448	903	864	68	2.43			11242	2058	1969	77	8.35	
	8412	847	797	69	2.58			12697	1929	1816	78	8.89	
	9452	760	697	71	2.71			14268	1731	1588	80	9.33	
	10362	675	600	72	2.79			15641	1537	1366	81	9.60	
	11843	531	433	73	2.88			17876	1211	987	82	9.89	



RFF-450B-B

叶轮直径 Wheel Diameter: 450 mm


叶轮形式 Wheel type:

后倾 Backward inclined

最大转速 Max RPM: 2600 RPM

最大风量 Max Volume: 30000 m³/h

最大静压 Max SP: 2300 Pa

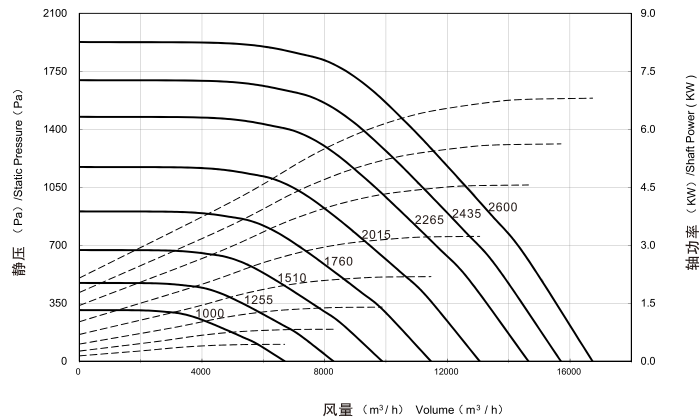

转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor	转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor
RPM	CMH	Pa	Pa	dB(A)	KW	KW	RPM	CMH	Pa	Pa	dB(A)	KW	KW
1000	3409	347	342	58	0.50	0.55	2015	6869	1411	1390	73	4.12	5.50
	4977	341	330	58	0.63	0.75		10029	1385	1341	73	5.17	7.5
	5717	332	318	59	0.69			11519	1350	1291	74	5.61	
	6457	311	293	60	0.73	1.1		13010	1265	1190	75	5.97	
	7255	279	256	62	0.77			14620	1135	1041	77	6.27	
	7954	249	221	63	0.79			16027	1008	895	78	6.45	
	9090	195	159	64	0.81			18316	795	647	79	6.64	
1255	4278	547	539	62	0.99	1.5	7721	1782	1756	75	5.84	7.5	
	6246	537	520	62	1.25		11273	1750	1694	75	7.34	11	
	7175	524	501	63	1.35		12949	1705	1631	76	7.96		
	8103	491	462	64	1.44	2.2	14624	1598	1504	77	8.48		
	9105	441	404	66	1.51		16433	1434	1315	79	8.90		
	9982	391	347	67	1.56		18015	1274	1131	80	9.16		
	11408	308	251	68	1.60		20589	1004	817	81	9.43		
1510	5147	793	781	66	1.73	3	8300	2060	2030	77	7.26	15	
	7516	778	753	66	2.18		12119	2023	1958	77	9.12		
	8632	758	725	67	2.36		13921	1970	1885	78	9.90		
	9749	710	668	68	2.51		15722	1847	1738	79	10.54		
	10956	637	584	70	2.64		17667	1658	1520	81	11.06		
	12010	567	503	71	2.71		19367	1473	1308	82	11.38		
	13726	446	363	72	2.79		22134	1160	944	83	11.72		
1760	5999	1076	1060	70	2.74	4	8863	2349	2314	78	8.84	11	
	8760	1057	1023	70	3.45		12941	2307	2233	78	11.11	15	
	10062	1030	985	71	3.74	14864	2246	2149	79	12.05			
	11364	965	908	72	3.98	16787	2106	1982	80	12.83			
	12769	866	794	74	4.18	18864	1890	1733	82	13.47			
	13999	769	683	75	4.30	20680	1680	1491	83	13.86	18.5		
	15998	606	493	76	4.43	23634	1323	1077	84	14.27			

RFF-500B-B

叶轮直径 Wheel Diameter: 500 mm


叶轮形式 Wheel type:

后倾 Backward inclined

最大转速 Max RPM: 2200 RPM

最大风量 Max Volume: 35000 m³/h

最大静压 Max SP: 2000 Pa

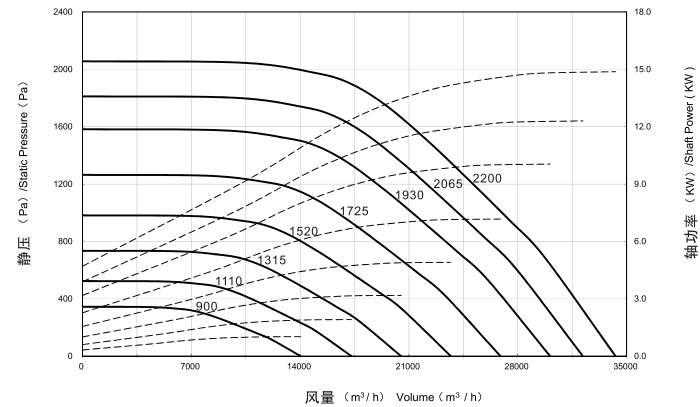

转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor	转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor			
RPM	CMH	Pa	Pa	dB(A)	KW	KW	RPM	CMH	Pa	Pa	dB(A)	KW	KW			
900	4208	347	342	58	0.62	0.75	1725	8066	1276	1258	73	4.37	5.5			
	6145	341	330	58	0.78	1.1		11777	1252	1213	73	5.49	7.5			
	7058	332	318	59	0.85			13528	1219	1168	74	5.96				
	7971	311	293	60	0.90			15278	1142	1077	75	6.34				
	8957	278	256	62	0.95			17168	1024	942	77	6.66				
	9819	248	221	63	0.97			18821	909	810	78	6.85				
	11222	194	159	64	1.00			21509	714	585	79	7.06	11			
1110	5190	529	521	63	1.16	1.5	9025	1597	1574	75	6.12	1930		11		
	7578	518	502	63	1.46		2.2	13177	1568	1519	75				7.69	
	8705	505	484	64	1.59			15135	1526	1462	76				8.34	
	9831	473	446	65	1.69			17093	1430	1348	77				8.88	
	11047	424	390	67	1.77			19208	1282	1179	79				9.33	
	12111	376	335	68	1.83			21057	1138	1014	80				9.60	
	13841	296	242	69	1.88	3		24065	895	733	81				9.88	2065
1315	6149	742	731	67	1.94		4	9656	1828	1802	76				7.50	
	8978	728	705	67	2.43			14099	1795	1739	76		9.42			
	10312	709	679	68	2.64			16194	1747	1674	77	10.22				
	11647	664	626	69	2.81			18289	1636	1543	78	10.88				
	13087	595	547	71	2.95			20552	1467	1349	80	11.43				
	14347	529	471	72	3.04			22530	1303	1161	81	11.76				
	16397	415	340	73	3.13	5.5	25749	1024	839	82	12.11	2200	18.5			
1520	7107	990	976	70	2.99		10287	2075	2045	78	9.07					
	10378	972	942	70	3.76		15020	2037	1974	78	11.40					
	11920	947	907	71	4.08		17253	1983	1900	79	12.36					
	13462	887	836	72	4.34		19485	1857	1751	80	13.16					
	15128	795	731	74	4.56		21895	1666	1532	82	13.82					
	16584	706	629	75	4.69		24003	1479	1318	83	14.22					
	18953	554	454	76	4.83	27432	1162	952	84	14.64						



RFF-560B-B

叶轮直径 Wheel Diameter: 560 mm


叶轮形式 Wheel type:

后倾 Backward inclined

最大转速 Max RPM: 2200 RPM

最大风量 Max Volume: 50000 m³/h

最大静压 Max SP: 2600 Pa

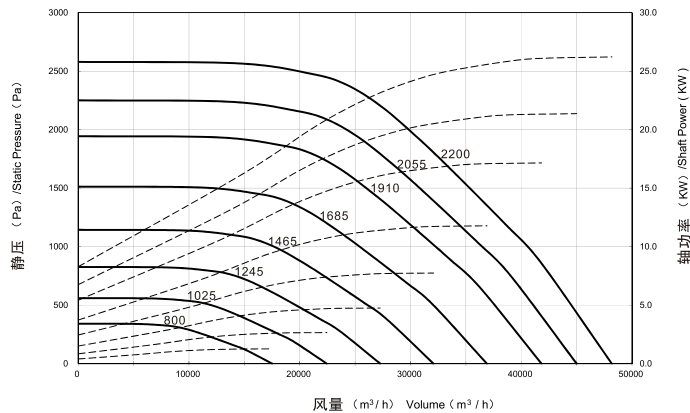

转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor	转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor
RPM	CMH	Pa	Pa	dB(A)	KW	KW	RPM	CMH	Pa	Pa	dB(A)	KW	KW
800	5255	344	339	59	0.77	1.1	1685	11069	1527	1505	75	7.18	11
	7674	337	327	59	0.97			16162	1498	1452	75	9.02	
	8814	329	315	60	1.05	18565		1459	1398	76	9.79	15	
	9954	309	291	61	1.12	20967		1367	1289	77	10.42		
	11186	276	254	63	1.17	23560		1225	1127	79	10.94		
	12263	246	219	64	1.20	25828		1088	970	80	11.26		
	14015	193	158	65	1.24	29518		854	700	81	11.59		
1025	6734	565	557	65	1.62	2.2	1910	12547	1962	1934	78	10.46	18.5
	9832	554	537	65	2.03			18321	1926	1866	78	13.14	
	11293	540	517	66	2.20	21043		1875	1796	79	14.25		
	12754	506	477	67	2.35	23766		1756	1656	80	15.17		
	14332	453	417	69	2.46	26707		1574	1448	82	15.93		
	15712	403	359	70	2.53	29277		1398	1246	83	16.39	22	
	17956	316	259	71	2.61	33460		1098	900	84	16.88		
1245	8179	834	822	69	2.90	4	2055	13500	2271	2239	80	13.03	15
	11942	818	793	69	3.64			19712	2229	2160	80	16.37	18.5
	13717	796	763	70	3.95	22641		2170	2079	81	17.75	22	
	15492	747	704	71	4.20	25571		2033	1917	82	18.90		
	17408	669	615	73	4.41	28734		1822	1676	84	19.85	30	
	19084	594	529	74	4.54	31500		1618	1442	85	20.42		
	21810	466	382	75	4.68	36000		1272	1042	86	21.03		
1465	9624	1154	1138	72	4.72	7.5	2200	14453	2603	2566	81	15.98	22
	14052	1133	1098	72	5.93			21102	2555	2476	81	20.08	30
	16141	1103	1057	73	6.43	24239		2487	2383	82	21.78		
	18229	1033	974	74	6.85	27375		2330	2197	83	23.19		
	20484	926	852	76	7.19	30761		2089	1921	85	24.35		
	22456	822	733	77	7.40	33723		1855	1653	86	25.05		
	25664	646	529	78	7.62	38540		1457	1194	87	25.80		

RFF-630B-B

叶轮直径 Wheel Diameter: 630 mm


叶轮形式 Wheel type:

后倾 Backward inclined

最大转速 Max RPM: 1900 RPM

最大风量 Max Volume: 60000 m³/h

最大静压 Max SP: 2500 Pa

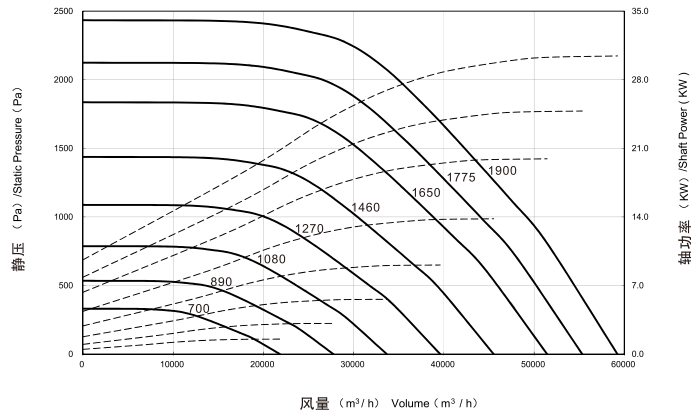

转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor	转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor
RPM	CMH	Pa	Pa	dB(A)	KW	KW	RPM	CMH	Pa	Pa	dB(A)	KW	KW
700	6548	334	329	60	0.93	1.5	1460	13656	1451	1430	76	8.42	11
	9560	327	317	60	1.17			19940	1425	1380	76	10.58	15
	10981	319	305	61	1.26			22903	1387	1328	77	11.47	
	12402	299	282	62	1.35	25867		1300	1225	78	12.21		
	13936	268	246	64	1.41	29067		1166	1071	80	12.82		
	15278	238	212	65	1.45	31865		1035	921	81	13.20		
	17460	187	153	66	1.50	36417		815	666	82	13.59		
890	8325	539	531	65	1.91	3	1650	15433	1854	1827	79	12.15	18.5
	12155	530	513	65	2.40			22535	1819	1762	79	15.27	
	13961	516	494	66	2.60			25884	1771	1696	80	16.56	
	15768	483	455	67	2.77	4		29233	1660	1564	81	17.63	22
	17719	433	398	69	2.91			32849	1489	1368	83	18.51	
	19424	384	342	70	2.99			36011	1323	1177	84	19.05	
	22199	302	247	71	3.08			41156	1040	850	85	19.61	
1080	10102	794	783	69	3.41	5.5	1775	16603	2145	2114	80	15.13	18.5
	14750	779	755	69	4.28			24242	2106	2040	80	19.01	22
	16942	759	727	70	4.64			27845	2050	1963	81	20.61	30
	19134	711	670	71	4.94	31447		1921	1810	82	21.95		
	21501	638	586	73	5.19	35338		1723	1583	84	23.04		
	23571	566	504	74	5.34	38740		1531	1362	85	23.71		
	26938	446	364	75	5.50	44274		1204	984	86	24.42		
1270	11879	1098	1082	73	5.54	11	1900	17772	2457	2422	82	18.55	22
	17345	1078	1044	73	6.96			25949	2413	2337	82	23.31	30
	19923	1050	1005	74	7.55			29805	2349	2249	83	25.28	
	22500	984	927	75	8.04			33662	2201	2074	84	26.92	
	25284	882	810	77	8.44			37826	1975	1814	86	28.26	
	27718	783	697	78	8.68			41468	1753	1560	87	29.08	
	31678	617	504	79	8.94			47392	1379	1127	88	29.95	



RFF-710B-B

叶轮直径 Wheel Diameter: 710 mm


叶轮形式 Wheel type:

后倾 Backward inclined

最大转速 Max RPM: 1700 RPM

最大风量 Max Volume: 75000 m³/h

最大静压 Max SP: 2500 Pa

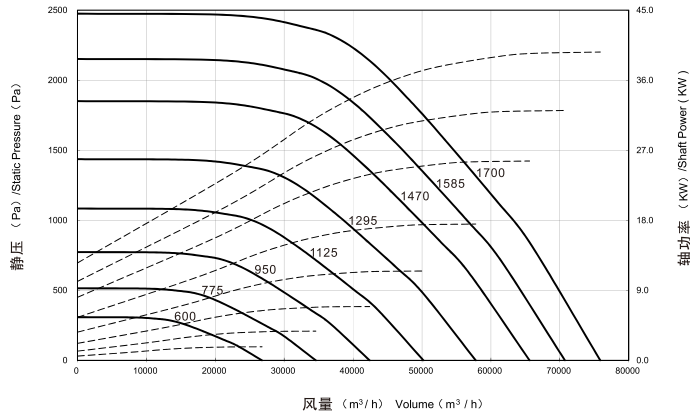

转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor	转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor
RPM	CMH	Pa	Pa	dB(A)	KW	KW	RPM	CMH	Pa	Pa	dB(A)	KW	KW
600	8033	312	307	60	1.06	1.5	1295	17338	1450	1429	77	10.68	15
	11729	306	296	60	1.33			25316	1425	1379	77	13.42	
	13472	298	285	61	1.45			29078	1387	1327	78	14.55	
	15216	279	263	62	1.54	2.2		32840	1301	1224	79	15.49	18.5
	17098	251	230	64	1.62			36903	1167	1070	81	16.27	
	18744	223	198	65	1.66			40456	1038	921	82	16.74	
	21422	176	143	66	1.71			46235	817	665	83	17.24	
775	10376	520	512	66	2.29	3	1470	19681	1869	1841	80	15.62	18.5
	15150	510	494	66	2.88			28737	1836	1777	80	19.63	22
	17402	497	475	67	3.12			33007	1788	1710	81	21.29	30
	19654	466	438	68	3.32	37278		1676	1577	82	22.66		
	22085	418	383	70	3.49	41890		1504	1379	84	23.80		
	24211	372	330	71	3.59	45923		1336	1186	85	24.48		
	27670	293	238	72	3.69	52483		1053	857	86	25.21		
950	12719	781	769	70	4.22	5.5	1585	21221	2173	2141	81	19.58	22
	18571	767	742	70	5.30			30985	2134	2066	81	24.60	30
	21331	746	714	71	5.75			35590	2078	1988	82	26.68	
	24091	700	659	72	6.12	7.5		40195	1948	1833	83	28.41	37
	27072	628	576	74	6.42			45167	1748	1603	85	29.83	
	29678	558	495	75	6.61			49515	1554	1379	86	30.69	
	33918	440	358	76	6.81			56589	1224	996	87	31.61	
1125	15062	1095	1079	74	7.00	11	1700	22761	2500	2463	83	24.16	30
	21992	1075	1041	74	8.80			33233	2455	2376	83	30.36	37
	25261	1047	1002	75	9.54			38172	2391	2287	84	32.92	
	28529	982	924	76	10.16	15		43111	2241	2109	85	35.05	45
	32059	881	808	78	10.67			48444	2011	1844	87	36.81	
	35145	783	695	79	10.97			53108	1788	1587	88	37.87	
	40166	617	502	80	11.30			60695	1409	1146	89	39.00	

RFF-800B-B

叶轮直径 Wheel Diameter: 800 mm


叶轮形式 Wheel type:

后倾 Backward inclined

最大转速 Max RPM: 1500 RPM

最大风量 Max Volume: 95000 m³/h

最大静压 Max SP: 2500 Pa

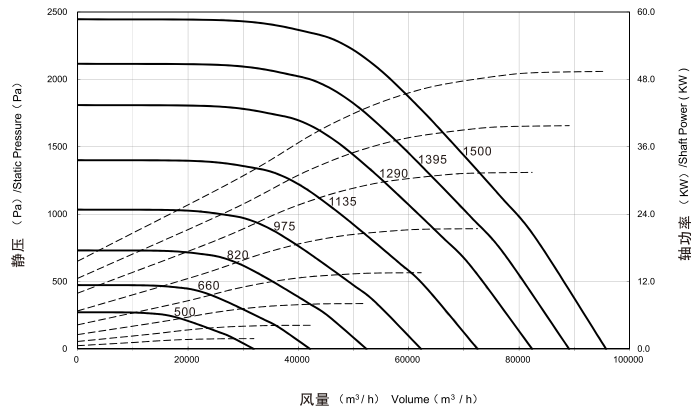

转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor	转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor
RPM	CMH	Pa	Pa	dB(A)	KW	KW	RPM	CMH	Pa	Pa	dB(A)	KW	KW
500	9576	274	270	60	1.12	1.5	1135	21738	1415	1394	78	13.06	15
	13982	270	261	60	1.40	2.2		31740	1390	1345	78	16.41	18.5
	16061	263	251	61	1.52			36457	1354	1294	79	17.80	22
	18139	247	232	62	1.62			41175	1269	1193	80	18.95	
	20383	222	203	64	1.70			46269	1140	1044	82	19.89	30
	22345	196	174	65	1.75			50722	1014	898	83	20.47	
	25537	155	126	66	1.80	57969		800	649	84	21.08	30	
660	12641	478	471	66	2.57	3	1290	24707	1827	1800	81	19.17	22
	18457	470	455	66	3.23	4		36075	1796	1737	81	24.09	30
	21200	458	438	67	3.50			41436	1749	1672	82	26.13	
	23943	430	404	68	3.73			5.5	46798	1641	1542	83	
	26905	386	353	70	3.91	52587			1473	1348	85	29.21	
	29495	343	304	71	4.02	57649			1310	1160	86	30.05	
	33709	270	219	72	4.14	65885			1033	838	87	30.95	
820	15705	738	727	71	4.92	7.5	1395	26718	2137	2105	82	24.25	30
	22931	726	702	71	6.19			39011	2100	2031	82	30.47	37
	26339	707	676	72	6.71			44809	2045	1955	83	33.04	
	29747	663	623	73	7.14	11		50607	1918	1803	84	35.18	45
	33428	595	545	75	7.50			56868	1722	1576	86	36.94	
	36645	529	469	76	7.72			62342	1531	1356	87	38.00	
	41880	418	339	77	7.95			71248	1209	980	88	39.13	
975	18674	1044	1028	74	8.28	15	1500	28729	2471	2434	84	30.14	37
	27266	1025	992	74	10.40			41947	2428	2349	84	37.88	45
	31318	999	955	75	11.28			48182	2366	2261	85	41.08	55
	35370	937	881	76	12.01			54416	2217	2084	86	43.73	
	39746	841	770	78	12.61			61148	1991	1823	88	45.92	
	43572	748	663	79	12.98			67034	1770	1568	89	47.25	
	49797	591	479	80	13.36			76610	1397	1133	90	48.65	



RFF-900B-B

叶轮直径 Wheel Diameter: 900 mm


叶轮形式 Wheel type:

后倾 Backward inclined

最大转速 Max RPM: 1400 RPM

最大风量 Max Volume: 127000 m³/h

最大静压 Max SP: 2700 Pa

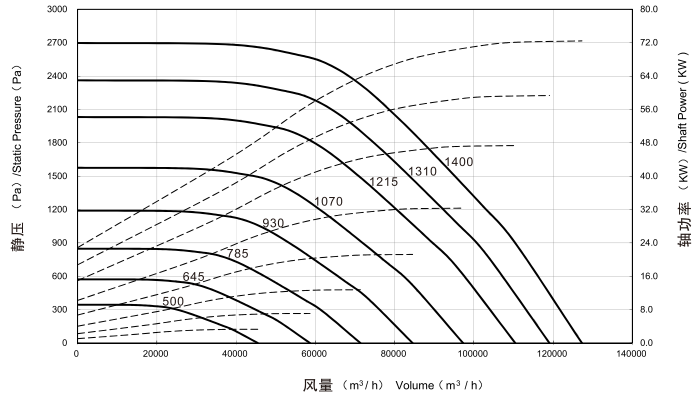

转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor	转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor
RPM	CMH	Pa	Pa	dB(A)	KW	KW	RPM	CMH	Pa	Pa	dB(A)	KW	KW
500	13635	347	342	64	2.01	3	1070	29179	1592	1568	80	19.72	22
	19909	341	330	64	2.53			42604	1565	1513	80	24.77	30
	22867	333	318	65	2.74			48936	1524	1456	81	26.87	
	25826	312	293	66	2.92	4		55268	1429	1342	82	28.61	37
	29021	280	256	68	3.06			62106	1284	1174	84	30.04	
	31815	250	221	69	3.15			68084	1142	1010	85	30.90	
	36360	197	159	70	3.25			77810	901	729	86	31.82	
645	17589	579	570	69	4.32	5.5	1215	33133	2052	2021	83	28.87	45
	25682	569	550	69	5.43			48378	2016	1950	83	36.27	
	29499	554	529	70	5.89			55568	1965	1877	84	39.34	
	33316	520	488	71	6.27	7.5		62758	1843	1731	85	41.88	55
	37438	467	427	73	6.58			70522	1654	1513	87	43.98	
	41041	415	367	74	6.77			77310	1472	1302	88	45.25	
	46904	327	265	75	6.97			88355	1163	941	89	46.59	
785	21407	857	844	73	7.79	11	1310	35724	2386	2350	84	36.18	45
	31257	842	814	73	9.78			52161	2344	2267	84	45.46	55
	35902	821	784	74	10.61			59913	2284	2182	85	49.31	
	40547	770	723	75	11.30	15		67665	2142	2012	86	52.49	75
	45564	691	632	77	11.86			76036	1923	1759	88	55.12	
	49950	615	544	78	12.20			83355	1711	1514	89	56.71	
	57085	486	393	79	12.57			95263	1351	1093	90	58.40	
930	25361	1202	1184	77	12.95	22	1400	38178	2725	2684	86	44.17	55
	37030	1182	1143	77	16.27			55744	2677	2589	86	55.49	75
	42533	1151	1100	78	17.64			64029	2608	2492	87	60.18	
	48037	1080	1014	79	18.78			72313	2446	2298	88	64.07	
	53980	970	887	81	19.72	30		81260	2196	2009	90	67.28	90
	59176	862	763	82	20.29			89082	1954	1729	91	69.22	
	67630	681	551	83	20.90			101808	1543	1249	92	71.28	

RFF-1000B-B

叶轮直径 Wheel Diameter: 1000 mm


叶轮形式 Wheel type:

后倾 Backward inclined

最大转速 Max RPM: 1200 RPM

最大风量 Max Volume: 150000 m³/h

最大静压 Max SP: 2500 Pa

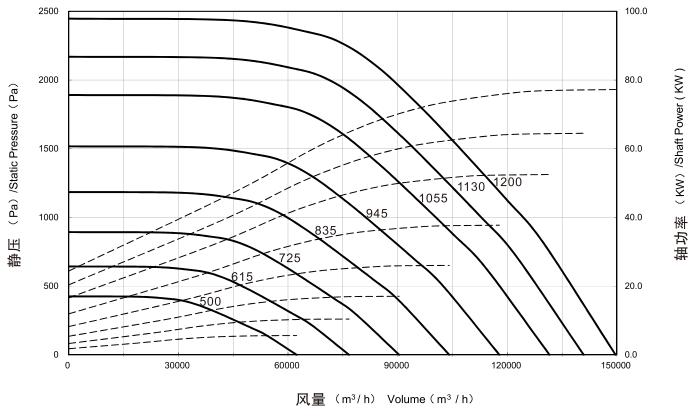

转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor	转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor
RPM	CMH	Pa	Pa	dB(A)	KW	KW	RPM	CMH	Pa	Pa	dB(A)	KW	KW
500	18704	429	423	67	3.41	4	945	35350	1545	1510	81	23.00	30
	27310	421	408	67	4.28	5.5		51615	1533	1457	81	28.90	37
	31368	410	392	68	4.64			59286	1502	1402	82	31.35	
	35427	385	362	69	4.94	7.5		66957	1420	1293	83	33.37	45
	39810	344	316	71	5.19			75241	1291	1130	85	35.04	
	43642	306	272	72	5.34			82483	1166	973	86	36.05	
	49877	242	197	73	5.50			94267	954	702	87	37.13	
615	23006	649	639	71	6.34	11	1055	39465	1926	1882	83	32.01	37
	33591	637	617	71	7.97			57623	1909	1815	83	40.22	45
	38583	621	594	72	8.64			66187	1871	1747	84	43.62	55
	43575	581	547	73	9.20			74751	1770	1611	85	46.43	
	48966	522	479	75	9.66			83999	1609	1409	87	48.76	75
	53680	464	412	76	9.94			92085	1453	1212	88	50.17	
	61348	366	298	77	10.23			105240	1190	876	89	51.66	
725	27120	910	889	75	10.39	15	1130	42270	2210	2159	82	39.33	45
	39599	902	857	75	13.05			61719	2191	2083	83	49.42	55
	45484	884	825	76	14.15			70892	2148	2005	84	53.59	75
	51369	836	761	77	15.07			80065	2030	1848	86	57.06	
	57724	760	665	79	15.82			89970	1846	1616	87	59.91	
	63281	686	572	80	16.28			98631	1667	1391	88	61.64	
	72321	561	413	81	16.76			112721	1365	1004	90	63.48	
835	31235	1207	1179	78	15.87	22	1200	44889	2491	2434	86	47.10	55
	45607	1196	1137	78	19.94			65543	2471	2349	86	59.18	75
	52385	1173	1095	79	21.62			75284	2422	2261	87	64.18	
	59163	1108	1009	80	23.02			85025	2289	2084	88	68.33	90
	66482	1007	882	82	24.17			95544	2082	1823	90	71.75	
	72882	910	759	83	24.87			104741	1879	1568	91	73.82	
	83294	745	548	84	25.61			119704	1540	1133	92	76.02	



RFF-250F-B

叶轮直径 Wheel Diameter: 250 mm


叶轮形式 Wheel type:

前弯 Forward curved

最大转速 Max RPM: 2400 RPM

最大风量 Max Volume: 12500 m³/h

最大静压 Max SP: 1450 Pa

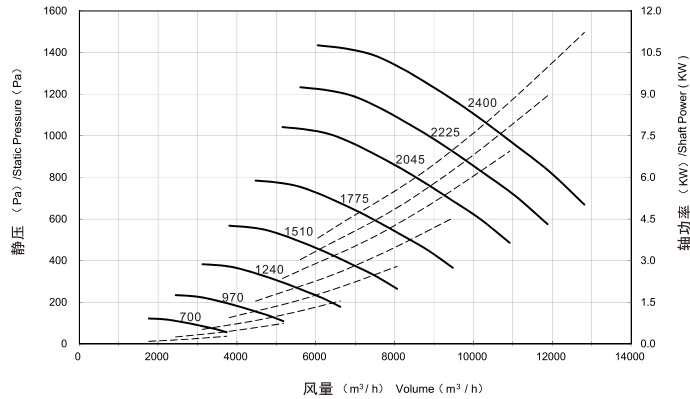

转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor	转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor
RPM	CMH	Pa	Pa	dB(A)	KW	KW	RPM	CMH	Pa	Pa	dB(A)	KW	KW
700	1972	138	121	43	0.11	0.12	1775	5001	883	776	63	1.80	2.2
	2180	138	118	44	0.13	0.18		5527	890	759	64	2.04	3
	2387	137	113	45	0.14			6054	881	724	65	2.30	
	2595	135	106	47	0.16			0.25	6580	865	680	67	
	2803	132	98	49	0.18	7107			849	633	69	2.89	
	3010	129	90	51	0.20	7633			830	581	71	3.23	
	3218	126	82	52	0.22	8160			810	525	72	3.59	
970	2733	264	232	50	0.29	0.37	2045	5762	1172	1030	66	2.75	5.5
	3021	266	227	51	0.33	0.55		6368	1181	1007	67	3.12	
	3308	263	216	52	0.37			6975	1169	961	68	3.51	
	3596	258	203	54	0.42	0.75		7581	1149	903	70	3.94	7.5
	3884	254	189	56	0.47			8188	1127	840	72	4.42	
	4171	247	173	58	0.53			8794	1102	771	74	4.94	
1240	4459	242	157	59	0.59	1.1	2225	9401	1075	697	75	5.48	7.5
	3494	431	379	55	0.61			6269	1388	1220	68	3.54	4
	3861	434	370	56	0.70			6929	1397	1192	69	4.02	5.5
	4229	430	353	57	0.78			7589	1383	1137	70	4.52	
	4597	422	332	59	0.88			8248	1360	1069	72	5.07	7.5
	4965	415	309	61	0.99			8908	1335	995	74	5.70	
	5332	405	283	63	1.10			9568	1305	913	76	6.36	11
5700	395	256	64	1.22	10228	1273	825	77	7.06	11			
	4254	639	562	60	1.11	1.5	2400	6762	1615	1419	70	4.45	5.5
	4702	644	549	61	1.26			7474	1626	1387	71	5.05	7.5
	5150	638	524	62	1.41			8185	1610	1323	72	5.67	
	5598	626	492	64	1.59			8897	1583	1244	74	6.37	
	6046	614	458	66	1.78			9609	1553	1158	76	7.15	
	6494	600	420	68	1.99			10321	1518	1062	78	7.98	
	6941	586	380	69	2.21			3	11033	1481	960	79	8.86

RFF-280F-B

叶轮直径 Wheel Diameter: 280 mm


叶轮形式 Wheel type:

前弯 Forward curved

最大转速 Max RPM: 2200 RPM

最大风量 Max Volume: 16000 m³/h

最大静压 Max SP: 1500 Pa

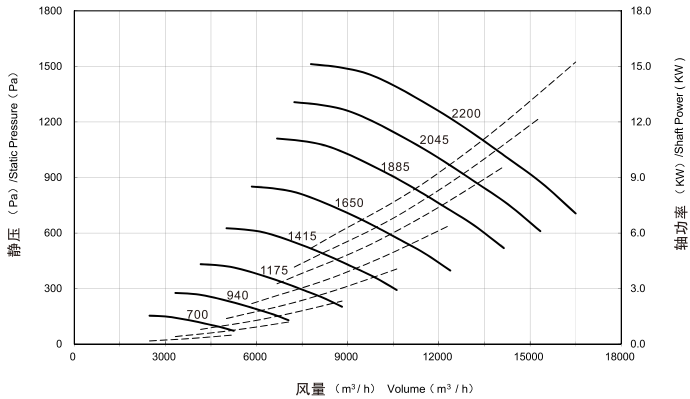

转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor	转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor
RPM	CMH	Pa	Pa	dB(A)	KW	KW	RPM	CMH	Pa	Pa	dB(A)	KW	KW
700	2771	172	151	46	0.19	0.25	1650	6531	958	841	65	2.55	3
	3063	174	148	47	0.22			7219	965	822	66	2.89	4
	3354	172	141	48	0.25			7906	956	785	67	3.25	
	3646	169	133	50	0.28	0.37		8594	939	737	69	3.65	5.5
	3938	166	124	52	0.31			9281	922	686	71	4.09	
	4229	162	113	54	0.35			9969	902	630	73	4.57	
	4521	158	102	55	0.39	0.55		10656	880	569	74	5.08	7.5
940	3721	311	273	53	0.47	0.75	1885	7461	1251	1098	68	3.80	5.5
	4113	313	267	54	0.53			8247	1259	1073	69	4.31	
	4504	311	255	55	0.60			9032	1247	1024	70	4.85	7.5
	4896	305	239	57	0.67	9818		1226	962	72	5.44		
	5288	300	223	59	0.76	10603		1204	896	74	6.10		
	5679	292	204	61	0.84	1.1		11389	1177	822	76	6.81	
	6071	286	185	62	0.94			12174	1149	743	77	7.57	11
1175	4651	486	427	58	0.92	1.5	2045	8095	1472	1292	70	4.85	5.5
	5141	489	417	59	1.04			8947	1482	1263	71	5.51	7.5
	5630	485	398	60	1.17			9799	1468	1205	72	6.19	
	6120	477	374	62	1.32	2.2		10651	1444	1133	74	6.94	11
	6609	468	348	64	1.48			11503	1416	1054	76	7.80	
	7099	457	319	66	1.65			12355	1385	967	78	8.70	
	7589	447	289	67	1.83			13207	1352	874	79	9.66	
1415	5601	705	619	62	1.61	3	2200	8708	1704	1496	71	6.04	7.5
	6191	710	605	63	1.82			9625	1716	1462	72	6.86	11
	6780	703	577	64	2.05			10542	1699	1395	73	7.70	
	7370	691	542	66	2.30	4		11458	1671	1311	75	8.64	15
	7959	679	505	68	2.58			12375	1640	1220	77	9.71	
	8549	663	463	70	2.88			13292	1603	1119	79	10.83	
	9139	648	419	71	3.20			14208	1565	1012	80	12.03	



RFF-315F-B

叶轮直径 Wheel Diameter: 315 mm


叶轮形式 Wheel type:

前弯 Forward curved

最大转速 Max RPM: 1900 RPM

最大风量 Max Volume: 20000 m³/h

最大静压 Max SP: 1450 Pa

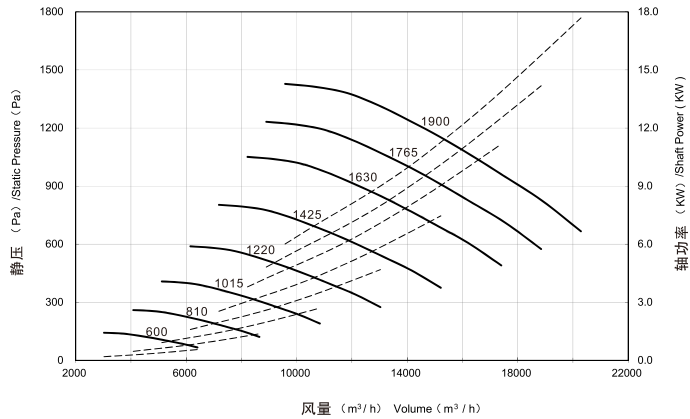

RFF-355F-B

叶轮直径 Wheel Diameter: 355 mm


叶轮形式 Wheel type:

前弯 Forward curved

最大转速 Max RPM: 1600 RPM

最大风量 Max Volume: 24000 m³/h

最大静压 Max SP: 1300 Pa

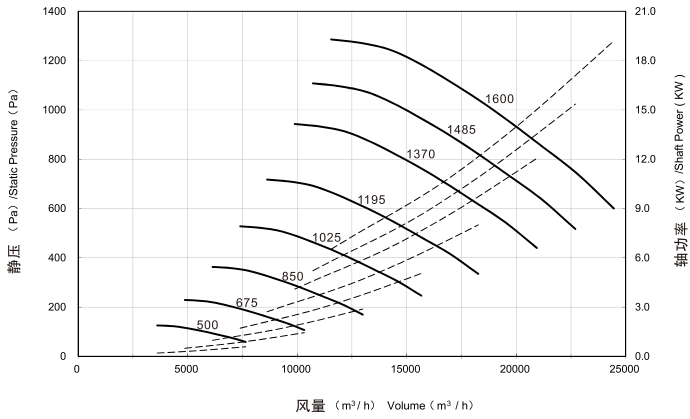

转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor	转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor
RPM	CMH	Pa	Pa	dB(A)	KW	KW	RPM	CMH	Pa	Pa	dB(A)	KW	KW
600	3382	161	141	47	0.22	0.25	1425	8031	906	794	65	2.96	4
	3738	162	138	48	0.25	8877		913	776	66	3.36		
	4094	160	131	49	0.28	9722		906	741	67	3.77	5.5	
	4449	157	123	51	0.32	10567		891	696	69	4.23		
	4805	155	115	53	0.35	11413		875	648	71	4.75	7.5	
	5161	151	105	55	0.40	12258		856	594	73	5.30		
	5517	148	95	56	0.44	13104		836	537	74	5.89		
810	4565	293	257	53	0.54	0.75	1630	9187	1186	1039	68	4.43	5.5
	5046	295	251	54	0.62			10154	1196	1016	69	5.02	7.5
	5526	292	239	55	0.69	11121		1184	969	70	5.65	11	
	6007	288	225	57	0.78	12088		1166	911	72	6.33		
	6487	282	209	59	0.87	13055		1145	848	74	7.11		
	6968	277	192	61	0.97	14022		1121	778	76	7.94		
	7448	271	174	62	1.08	14989		1094	703	77	8.82		
1015	5721	460	403	58	1.07	1.5	1765	9948	1390	1218	70	5.62	7.5
	6323	464	394	59	1.21			10995	1402	1191	71	6.38	
	6925	460	376	60	1.36	12042		1389	1136	72	7.17	11	
	7527	452	353	62	1.53	13089		1367	1068	74	8.04		
	8129	444	329	64	1.72	14136		1342	994	76	9.03	15	
	8731	435	302	66	1.92	15183		1314	912	78	10.08		
	9333	425	273	67	2.13	16230		1283	824	79	11.20		
1220	6876	664	582	62	1.86	3	1900	10708	1612	1412	72	7.01	11
	7600	670	569	63	2.11			11836	1624	1380	73	7.96	
	8323	664	543	64	2.37			12963	1610	1317	74	8.94	
	9047	653	510	66	2.66	4		14090	1583	1237	76	10.03	15
	9771	641	475	68	2.98			15217	1555	1152	78	11.27	
	10495	628	436	70	3.33			16344	1522	1057	80	12.57	
	11219	613	394	71	3.70			5	17472	1487	955	81	13.97

转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor	转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor
RPM	CMH	Pa	Pa	dB(A)	KW	KW	RPM	CMH	Pa	Pa	dB(A)	KW	KW
500	4034	142	124	46	0.23	0.37	1195	9640	811	709	65	3.17	4
	4458	143	121	47	0.26			10655	818	693	66	3.60	
	4883	142	116	48	0.30			11670	812	662	67	4.04	5.5
	5307	140	109	50	0.33	12685		799	622	69	4.54		
	5732	137	101	52	0.37	13699		786	579	71	5.10	7.5	
	6157	135	93	54	0.42	14714		770	531	73	5.69		
	6581	132	84	55	0.46	15729		753	480	74	6.32		
675	5445	259	226	53	0.57	0.75	1370	11052	1067	932	68	4.78	5.5
	6019	261	221	54	0.65			12215	1075	911	69	5.42	7.5
	6592	259	211	55	0.73			13379	1066	869	70	6.09	
	7165	255	198	57	0.82	1.1		14542	1050	817	72	6.84	11
	7738	251	185	59	0.92			15706	1033	761	74	7.68	
	8311	245	169	61	1.02			16869	1011	698	76	8.57	
	8885	240	153	62	1.14	1.5		18032	989	631	77	9.52	
850	6857	411	359	58	1.14		1485	11980	1253	1095	70	6.08	7.5
	7579	414	351	59	1.30			13241	1264	1071	71	6.91	11
	8301	411	335	60	1.46	14502		1254	1022	72	7.76		
	9023	405	315	62	1.63	15763		1234	960	74	8.71	15	
	9744	398	293	64	1.83	17024		1213	894	76	9.78		
	10466	390	269	66	2.05	18285		1188	820	78	10.91		
	11188	381	243	67	2.27	19546		1162	741	79	12.12		
1025	8269	597	522	62	2.00	2.2	1600	12908	1456	1272	71	7.61	11
	9139	602	510	63	2.27	3		14266	1467	1243	72	8.64	
	10010	597	487	64	2.55	15625		1455	1186	73	9.71		
	10880	587	457	66	2.86	4		16984	1433	1115	75	10.89	15
	11751	578	426	68	3.22			18342	1408	1037	77	12.23	
	12621	566	391	70	3.59			19701	1380	952	79	13.65	
	13491	554	353	71	3.99	5.5		21060	1349	860	80	15.16	18.5



RFF-400F-B

叶轮直径 Wheel Diameter: 400 mm


叶轮形式 Wheel type:

前弯 Forward curved

最大转速 Max RPM: 1400 RPM

最大风量 Max Volume: 30000 m³/h

最大静压 Max SP: 1250 Pa

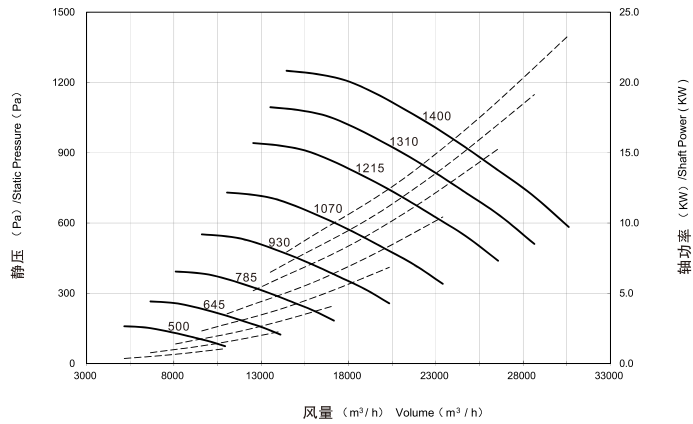

RFF-450F-B

叶轮直径 Wheel Diameter: 450 mm


叶轮形式 Wheel type:

前弯 Forward curved

最大转速 Max RPM: 1300 RPM

最大风量 Max Volume: 40000 m³/h

最大静压 Max SP: 1400 Pa

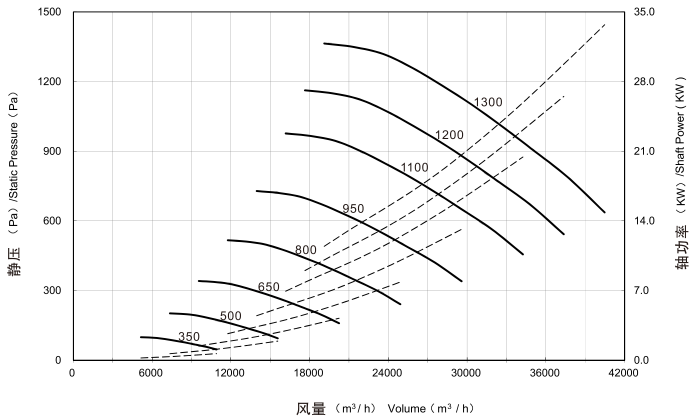

转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor	转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor
RPM	CMH	Pa	Pa	dB(A)	KW	KW	RPM	CMH	Pa	Pa	dB(A)	KW	KW
500	5770	181	158	50	0.42	0.55	1070	12348	829	722	66	4.13	5.5
	6378	183	154	51	0.48			13648	837	706	67	4.69	
	6985	181	147	52	0.54			14948	830	673	68	5.27	
	7592	178	138	54	0.60	0.75		16248	818	633	70	5.92	7.5
	8200	176	129	56	0.68			17547	805	589	72	6.64	
	8807	172	118	58	0.76			18847	789	540	74	7.41	
	9414	169	107	59	0.84	1.1		20147	773	488	75	8.24	11
645	7444	301	262	55	0.91	1.5	1215	14022	1069	931	69	6.05	7.5
	8227	303	256	56	1.03			15497	1078	910	70	6.87	11
	9011	302	245	57	1.15			16973	1070	868	71	7.72	
	9794	297	230	59	1.30			18449	1055	816	73	8.66	
	10578	292	214	61	1.46			19925	1037	759	75	9.73	
	11361	286	196	63	1.62	2.2		21401	1018	697	77	10.85	15
	12145	280	177	64	1.80			22877	997	630	78	12.06	
785	9059	447	389	60	1.63	3	1310	15118	1242	1082	71	7.59	11
	10013	450	380	61	1.85			16709	1254	1058	72	8.61	
	10966	446	362	62	2.08			18301	1244	1009	73	9.68	
	11920	441	341	64	2.34			19892	1226	949	75	10.86	
	12874	433	317	66	2.62			21483	1207	883	77	12.19	
	13827	425	291	68	2.93	4		23075	1183	810	79	13.60	15
	14781	416	263	69	3.25			24666	1158	732	80	15.11	
930	10733	626	545	63	2.71	3	1400	16156	1419	1236	72	9.26	11
	11862	632	533	64	3.08	4		17857	1432	1208	73	10.51	15
	12992	627	509	65	3.46			19558	1421	1153	74	11.81	
	14122	618	478	67	3.88			5.5	21259	1400	1083	76	
	15251	608	445	69	4.36	22959			1377	1008	78	14.88	
	16381	596	408	71	4.87	24660			1351	925	80	16.61	
	17511	584	369	72	5.41	7.5			26361	1323	836	81	18.45

转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor	转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor
RPM	CMH	Pa	Pa	dB(A)	KW	KW	RPM	CMH	Pa	Pa	dB(A)	KW	KW
350	5751	113	98	46	0.26	0.37	950	15610	827	720	67	5.21	7.5
	6356	114	96	47	0.30			17253	835	704	68	5.92	
	6962	112	91	48	0.33			18896	829	672	69	6.65	
	7567	111	86	50	0.37	0.55		20539	817	631	71	7.46	11
	8172	109	80	52	0.42			22182	805	588	73	8.38	
	8778	107	73	54	0.47			23826	789	539	75	9.35	
	9383	105	66	55	0.52			25469	773	487	76	10.39	
500	8216	230	200	53	0.76	1.1	1100	18075	1110	966	71	8.09	11
	9081	231	195	54	0.86			19977	1120	944	72	9.19	
	9945	230	186	55	0.97			21880	1112	901	73	10.32	15
	10810	227	175	57	1.09	1.5		23782	1095	846	75	11.58	
	11675	223	163	59	1.22			25685	1079	788	77	13.01	
	12540	218	149	61	1.36	2.2		27588	1059	723	79	14.51	18.5
	13405	214	135	62	1.51			29490	1037	653	80	16.12	
650	10680	387	337	59	1.67	2.2	1200	19718	1320	1149	72	10.51	15
	11805	391	330	60	1.90			21793	1333	1124	73	11.93	
	12929	389	315	61	2.13	3		23869	1323	1072	74	13.40	18.5
	14053	383	296	63	2.39			25944	1304	1007	76	15.04	
	15177	377	275	65	2.68	4		28020	1284	938	78	16.89	22
	16302	369	252	67	2.99			30095	1259	860	80	18.84	
	17426	362	228	68	3.33			32171	1233	777	81	20.93	
800	13145	587	511	64	3.11	4	1300	21361	1550	1349	74	13.36	15
	14529	592	499	65	3.53			23609	1565	1319	75	15.17	18.5
	15913	588	476	66	3.97	5.5		25858	1553	1258	76	17.04	22
	17296	580	448	68	4.46			28106	1530	1182	78	19.12	
	18680	571	417	70	5.00	7.5		30355	1506	1100	80	21.47	30
	20064	560	382	72	5.58			32603	1478	1009	82	23.96	
	21447	549	346	73	6.20			34852	1448	912	83	26.62	



RFF-500F-B

叶轮直径 Wheel Diameter: 500 mm


叶轮形式 Wheel type:

前弯 Forward curved

最大转速 Max RPM: 1100 RPM

最大风量 Max Volume: 45000 m³/h

最大静压 Max SP: 1200 Pa

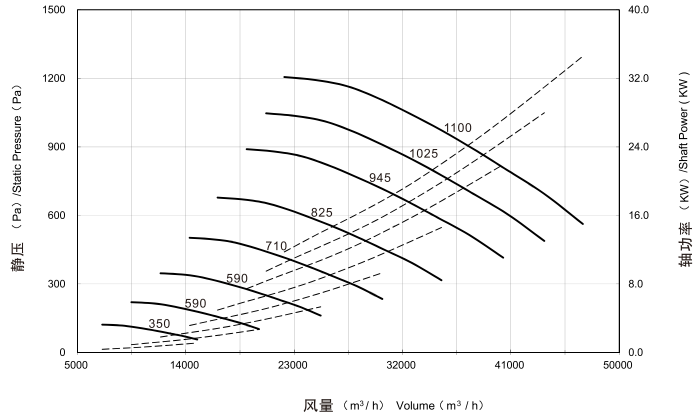

RFF-560F-B

叶轮直径 Wheel Diameter: 560 mm


叶轮形式 Wheel type:

前弯 Forward curved

最大转速 Max RPM: 1000 RPM

最大风量 Max Volume: 58000 m³/h

最大静压 Max SP: 1300 Pa

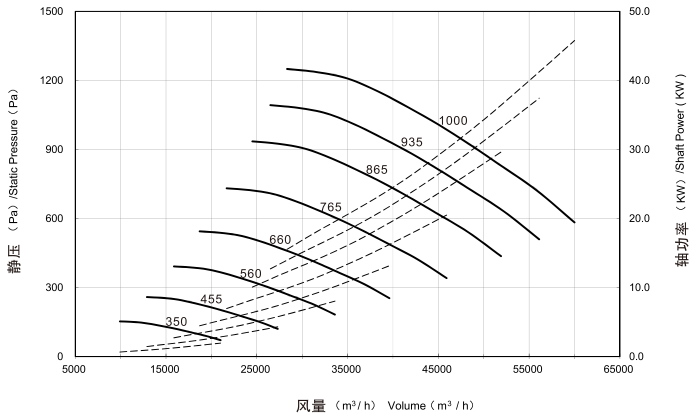

转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor	转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor
RPM	CMH	Pa	Pa	dB(A)	KW	KW	RPM	CMH	Pa	Pa	dB(A)	KW	KW
350	7889	138	121	49	0.44	0.55	825	18595	768	671	67	5.78	7.5
	8719	139	118	50	0.50			20553	774	656	68	6.56	
	9550	138	113	51	0.56	0.75		22510	767	625	69	7.38	11
	10380	136	106	53	0.63			24467	755	588	71	8.28	
	11211	133	98	55	0.71			26425	742	547	73	9.29	
	12041	131	90	57	0.79	1.1		28382	727	502	75	10.37	15
	12871	128	82	58	0.88			30340	711	454	76	11.52	
590	10594	249	218	55	1.07	1.5	945	21300	1007	880	70	8.69	11
	11709	251	213	56	1.21			23542	1015	860	71	9.87	
	12824	249	203	57	1.36			25784	1007	821	72	11.08	15
	13939	245	191	59	1.53	2.2		28026	991	771	74	12.44	
	15054	241	178	61	1.72			30268	974	718	76	13.97	
	16169	236	163	63	1.92			32511	954	659	78	15.59	
	17284	230	147	64	2.13			34753	933	595	79	17.31	22
590	13298	392	343	60	2.11	3	1025	23103	1184	1035	72	11.09	15
	14698	395	335	61	2.40			25535	1194	1012	73	12.59	
	16098	392	320	62	2.70			27967	1185	966	74	14.14	18.5
	17498	387	301	64	3.03	4		30399	1165	907	76	15.87	
	18898	380	280	66	3.40			32831	1146	845	78	17.82	22
	20298	372	257	68	3.79			35263	1123	775	80	19.89	
	21697	364	232	69	4.21			37695	1097	700	81	22.09	30
710	16003	569	497	64	3.69	5.5	1100	24794	1364	1192	74	13.71	18.5
	17688	573	486	65	4.18			27404	1376	1166	75	15.56	
	19372	568	463	66	4.70			30013	1364	1112	76	17.48	22
	21057	559	435	68	5.27	7.5		32623	1342	1045	78	19.62	
	22741	550	405	70	5.92			35233	1320	973	80	22.03	30
	24426	539	372	72	6.61			37843	1292	892	82	24.58	
	26110	527	336	73	7.34			40453	1264	807	83	27.31	

转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor	转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor
RPM	CMH	Pa	Pa	dB(A)	KW	KW	RPM	CMH	Pa	Pa	dB(A)	KW	KW
350	11083	173	151	52	0.78	1.1	765	24225	827	723	69	8.12	11
	12250	175	148	53	0.88			26775	834	707	70	9.22	
	13417	173	141	54	0.99			29325	827	675	71	10.36	
	14583	171	133	56	1.11	1.5		31875	814	634	73	11.63	15
	15750	168	124	58	1.25			34425	800	590	75	13.06	
	16917	164	113	60	1.40	2.2		36975	783	541	77	14.57	18.5
	18083	160	102	61	1.55			39525	766	489	78	16.19	
455	14408	293	256	58	1.71	2.2	865	27392	1058	925	72	11.75	15.0
	15925	295	250	59	1.94			30275	1067	904	73	13.33	
	17442	293	239	60	2.18			33158	1058	863	74	14.98	
	18958	288	224	62	2.45	3		36042	1041	811	76	16.81	18.5
	20475	283	209	64	2.75			38925	1023	754	78	18.88	
	21992	277	191	66	3.07	4		41808	1002	692	80	21.06	30
	23508	271	173	67	3.41			44692	980	626	81	23.40	
560	17733	444	388	63	3.19	4	935	29608	1236	1081	74	14.83	18.5
	19600	447	379	64	3.62			32725	1246	1056	75	16.84	
	21467	444	362	65	4.07			35842	1236	1008	76	18.92	
	23333	437	340	67	4.56	5.5		38958	1216	947	78	21.23	30
	25200	429	316	69	5.12			42075	1196	882	80	23.84	
	27067	420	290	71	5.72	7.5		45192	1171	809	82	26.60	
	28933	410	262	72	6.35			48308	1145	731	83	29.56	
660	20900	615	538	66	5.22	7.5	1000	31667	1414	1236	75	18.15	22
	23100	621	526	67	5.92			35000	1425	1208	76	20.60	
	25300	615	502	68	6.66			38333	1414	1153	77	23.15	
	27500	606	472	70	7.47	11		41667	1391	1083	79	25.97	30
	29700	595	439	72	8.39			45000	1367	1008	81	29.17	
	31900	583	403	74	9.36			48333	1339	925	83	32.55	
	34100	570	364	75	10.40			51667	1309	836	84	36.16	



RFF-630F-B

叶轮直径 **Wheel Diameter:** 630 mm


叶轮形式 **Wheel type:**

前弯 Forward curved

最大转速 **Max RPM:** 900 RPM

最大风量 **Max Volume:** 75000 m³/h

最大静压 **Max SP:** 1300 Pa

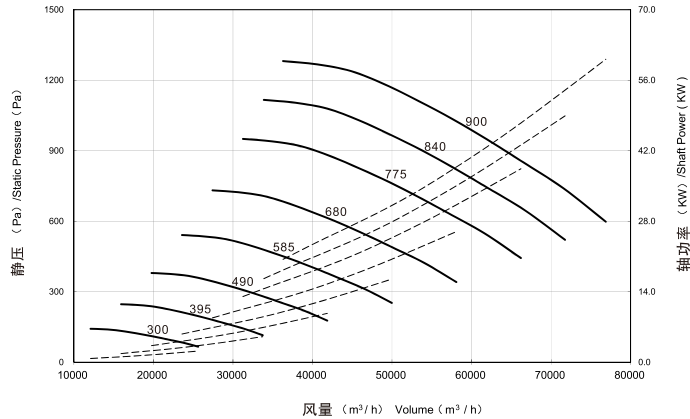

转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor	转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor	
RPM	CMH	Pa	Pa	dB(A)	KW	KW	RPM	CMH	Pa	Pa	dB(A)	KW	KW	
300	13526	162	141	53	0.88	1.1	680	30660	829	723	70	10.28	15	
	14950	163	138	54	1.00			33887	836	707	71	11.67		
	16374	161	131	55	1.13			37114	830	675	72	13.12		
	17798	159	123	57	1.26	1.5		40342	817	634	74	14.72	18.5	
	19222	157	115	59	1.42			43569	803	590	76	16.53		
	20646	153	105	61	1.58			46796	787	541	78	18.44		
22069	150	95	62	1.76	50024			770	489	79	20.49			
395	17810	280	244	59	2.02	3	775	34943	1077	940	73	15.22	18.5	
	19684	283	239	60	2.29			38621	1087	919	74	17.28		
	21559	280	228	61	2.57			42300	1077	876	75	19.42		
	23434	276	214	63	2.88	4		45978	1061	824	77	21.79	30	
	25309	271	199	65	3.24			49656	1044	767	79	24.47		
	27183	266	183	67	3.61			53334	1023	703	81	27.30		
29058	260	165	68	4.02	57012			1001	636	82	30.33			
490	22093	431	376	63	3.85	5.5	840	37874	1265	1104	75	19.38	22	
	24419	434	367	64	4.37			41861	1276	1079	76	22.00		
	26744	430	350	65	4.91			45847	1265	1029	77	24.72		
	29070	424	329	67	5.51	7.5		49834	1246	967	79	27.74	37	
	31395	417	306	69	6.18			53821	1225	900	81	31.15		
	33721	409	281	71	6.90			57807	1201	826	83	34.76		
36047	400	254	72	7.67	61794			1176	747	84	38.62			
585	26376	613	535	67	6.55	7.5	900	40579	1452	1267	76	23.84	30	
	29153	618	523	68	7.43			44851	1465	1239	77	27.06		
	31929	614	499	69	8.35			49122	1453	1182	78	30.41		
	34706	604	469	71	9.37	11		53394	1431	1111	80	34.12	45	
	37482	595	437	73	10.52			57665	1408	1034	82	38.32		
	40259	583	401	75	11.74			61937	1379	948	84	42.76		
43035	570	362	76	13.04	66208			1349	857	85	47.50			

RFF-710F-B

叶轮直径 **Wheel Diameter:** 710 mm


叶轮形式 **Wheel type:**

前弯 Forward curved

最大转速 **Max RPM:** 800 RPM

最大风量 **Max Volume:** 95000 m³/h

最大静压 **Max SP:** 1300 Pa

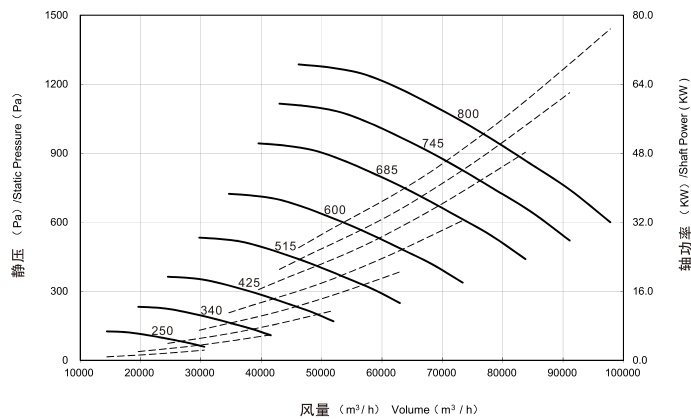

转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor	转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor
RPM	CMH	Pa	Pa	dB(A)	KW	KW	RPM	CMH	Pa	Pa	dB(A)	KW	KW
250	16134	143	124	52	0.93	1.1	600	38723	822	715	71	12.84	15
	17833	144	121	53	1.05	42799		830	699	72	14.58	18.5	
	19531	143	116	54	1.18	46875		824	667	73	16.38		
	21229	141	109	56	1.33	50951		812	627	75	18.38		22
	22928	138	101	58	1.49	55027		800	584	77	20.64		
	24626	136	93	60	1.67	59103		784	535	79	23.03		
	26325	133	84	61	1.85	63179		768	484	80	25.59		30
340	21943	264	230	59	2.34	3	685	44208	1071	932	74	19.11	22
	24253	267	225	60	2.65			48862	1081	911	75	21.69	30
	26562	264	214	61	2.98			53515	1073	869	76	24.37	
	28872	260	201	63	3.34	4		58169	1058	817	78	27.35	
	31182	256	187	65	3.76			62822	1042	761	80	30.71	
	33492	252	172	67	4.19			67476	1022	698	82	34.27	
	35801	246	155	68	4.66			72129	1002	631	83	38.07	45
425	27429	413	359	64	4.56	5.5	745	48081	1268	1103	76	24.58	30
	30316	416	351	65	5.18			53142	1279	1078	77	27.91	37
	33203	414	335	66	5.82			58203	1269	1028	78	31.36	
	36090	408	315	68	6.53	7.5		63264	1252	967	80	35.18	
	38977	401	293	70	7.34			68325	1233	900	82	39.51	
	41865	394	269	72	8.19			73386	1209	825	84	44.09	
	44752	386	243	73	9.09			78447	1185	746	85	48.98	55
515	33237	606	527	68	8.12	11	800	51630	1462	1272	77	30.44	37
	36736	611	515	69	9.22			57065	1475	1243	78	34.56	45
	40234	606	491	70	10.36			62500	1464	1186	79	38.83	
	43733	598	462	72	11.62	15		67934	1444	1115	81	43.56	
	47231	589	430	74	13.05			73369	1421	1037	83	48.92	
	50730	577	394	76	14.56			78804	1395	952	85	54.59	
	54229	566	356	77	16.18			84239	1366	860	86	60.65	75



RFF-800F-B

叶轮直径 Wheel Diameter: 800 mm


叶轮形式 Wheel type:

前弯 Forward curved

最大转速 Max RPM: 800 RPM

最大风量 Max Volume: 135000 m³/h

最大静压 Max SP: 1600 Pa

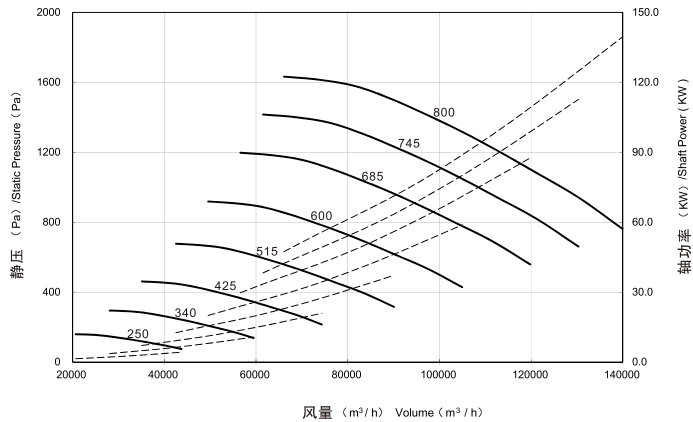

转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor	转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor
RPM	CMH	Pa	Pa	dB(A)	KW	KW	RPM	CMH	Pa	Pa	dB(A)	KW	KW
250	23081	182	158	56	1.69	2.2	600	55394	1046	908	75	23.32	30
	25510	183	154	57	1.92			61224	1057	888	76	26.48	
	27940	182	147	58	2.15	67055		1049	847	77	29.75		
	30369	180	138	60	2.41	72886		1035	796	79	33.38	37	
	32799	177	129	62	2.71	78717		1020	741	81	37.48	45	
	35228	174	118	64	3.03	84548		1002	680	83	41.83	55	
	37658	171	107	65	3.36	90379		982	614	84	46.47		
340	31390	336	292	63	4.24	5.5	685	63241	1364	1184	78	34.71	45
	34694	339	285	64	4.82			69898	1377	1157	79	39.40	
	37998	337	272	65	5.41	76555		1368	1104	80	44.27	55	
	41302	333	256	67	6.07	83212		1349	1037	82	49.67		
	44606	328	238	69	6.82	89869		1330	966	84	55.78	75	
	47911	321	218	71	7.61	96526		1306	886	86	62.24		
	51215	315	197	72	8.46	103183		1280	801	87	69.15	90	
425	39237	525	456	67	8.29	15	745	68780	1613	1400	80	44.65	55
	43367	530	445	68	9.41			76020	1629	1369	81	50.69	
	47498	527	425	69	10.57			83260	1618	1306	82	56.95	
	51628	519	399	71	11.86	90500		1596	1227	84	63.90	75	
	55758	512	372	73	13.32	97741		1572	1142	86	71.76		
	59888	502	341	75	14.87	104981		1544	1048	88	80.07	90	
	64018	493	308	76	16.51	112221		1514	947	89	88.96		110
515	47546	771	669	72	14.75	22	800	73858	1861	1615	81	55.29	75
	52551	778	654	73	16.74			81633	1878	1578	82	62.76	
	57556	773	624	74	18.81			89407	1866	1506	83	70.52	90
	62561	762	586	76	21.11	97182		1840	1415	85	79.12		
	67566	752	546	78	23.70	104956		1813	1317	87	88.85	110	
	72570	738	501	80	26.45	112731		1780	1208	89	99.15		
	77575	724	453	81	29.39	37		120505	1746	1092	90	110.15	132

RFF-900F-B

叶轮直径 Wheel Diameter: 900 mm


叶轮形式 Wheel type:

前弯 Forward curved

最大转速 Max RPM: 700 RPM

最大风量 Max Volume: 170000 m³/h

最大静压 Max SP: 1600 Pa

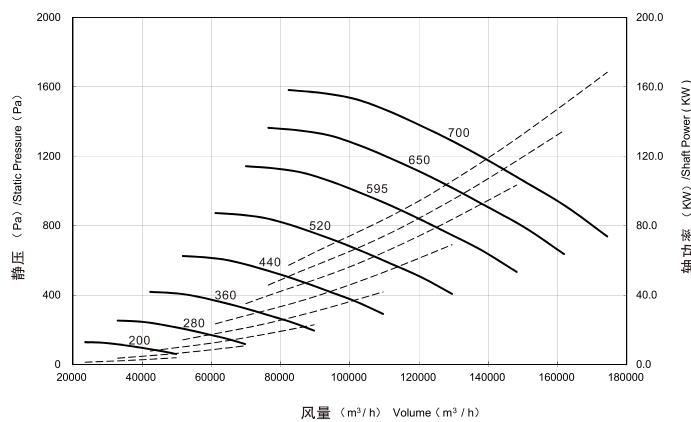

转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor	转速	风量 Volume	全压 T.P.	静压 S.P.	噪音 Noise	轴功率 Power	电机功率 Motor
RPM	CMH	Pa	Pa	dB(A)	KW	KW	RPM	CMH	Pa	Pa	dB(A)	KW	KW
200	26290	148	128	55	1.56	2.2	520	68355	996	863	75	27.36	37
	29058	149	125	56	1.77			75550	1006	844	76	31.06	
	31825	148	119	57	1.99			82745	999	805	77	34.90	
	34593	146	112	59	2.23	3		89941	987	757	79	39.16	45
	37360	144	104	61	2.50			97136	972	704	81	43.97	
	40127	142	96	63	2.79	4		104331	955	646	83	49.07	55
	42895	138	86	64	3.10			111526	937	584	84	54.51	
280	36806	288	250	62	4.27	5.5	595	78214	1304	1130	78	40.99	55
	40681	292	245	63	4.85			86447	1317	1105	79	46.53	55
	44555	289	233	64	5.45			94680	1308	1054	80	52.28	75
	48430	286	219	66	6.11	7.5		102913	1292	991	82	58.66	75
	52304	282	204	68	6.86			111146	1273	922	84	65.87	75
	56178	277	187	70	7.66	11		119379	1251	846	86	73.51	90
	60053	271	169	71	8.51			127612	1227	765	87	81.66	90
360	47323	478	414	67	9.08	15	650	85444	1556	1349	80	53.44	75
	52304	482	404	68	10.31			94438	1572	1319	81	60.66	75
	57285	479	386	69	11.58			103432	1562	1258	82	68.16	75
	62267	473	363	71	12.99	18.5		112426	1541	1182	84	76.48	90
	67248	466	338	73	14.59			121420	1519	1100	86	85.88	110
	72229	458	310	75	16.28	130414		1492	1009	88	95.83	110	
	77211	449	280	76	18.09	22		139408	1464	912	89	106.47	132
440	57839	713	618	72	16.58	18.5	700	92016	1804	1564	82	66.74	75
	63927	720	604	73	18.82	22		101702	1823	1529	83	75.77	90
	70015	715	576	74	21.14	30		111388	1811	1459	84	85.13	110
	76104	706	542	76	23.72			121074	1787	1371	86	95.52	110
	82192	696	504	78	26.64			130760	1761	1276	88	107.26	132
	88280	684	463	80	29.73	37		140446	1731	1171	90	119.69	132
	94368	671	418	81	33.02			150132	1698	1058	91	132.97	160



RFF-1000F-B

叶轮直径 Wheel Diameter: 1000 mm


叶轮形式 Wheel type:

前弯 Forward curved

最大转速 Max RPM: 600 RPM

最大风量 Max Volume: 200000 m³/h


最大静压 Max SP: 1450 Pa

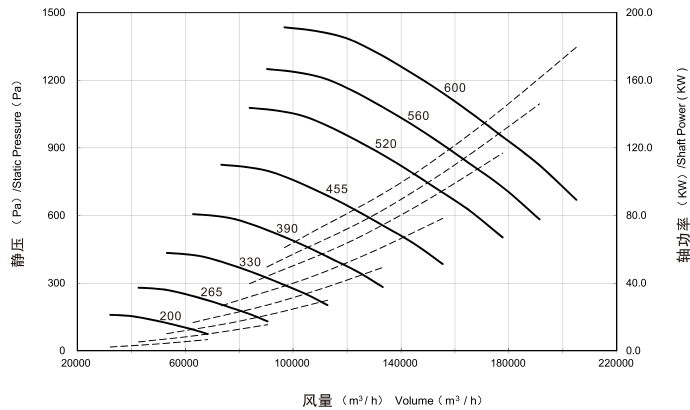

转速	风量	全压	静压	噪音	轴功率	电机功率	转速	风量	全压	静压	噪音	轴功率	电机功率
RPM	CMH	Pa	Pa	dB(A)	KW	KW	RPM	CMH	Pa	Pa	dB(A)	KW	KW
200	36064	181	158	58	2.64	3	455	82045	1007	816	76	31.04	37
	39860	183	154	59	2.99	4		90681	1031	798	77	35.24	45
	43656	181	147	60	3.36			99317	1041	761	78	39.59	
	47452	178	138	62	3.77			107953	1046	715	80	44.42	55
	51248	176	129	64	4.24	5.5		116590	1052	666	82	49.89	
	55044	172	118	66	4.73			125226	1056	611	84	55.67	75
265	58841	169	107	67	5.25	7.5	520	133862	1061	552	85	61.84	
	47784	318	277	64	6.13			93765	1316	1066	79	46.33	55
	52814	321	271	65	6.96			103635	1347	1042	80	52.60	
	57844	318	258	66	7.82	11		113505	1360	994	81	59.10	75
	62874	314	243	68	8.78			123375	1366	934	83	66.31	
	67904	309	226	70	9.86			133245	1373	869	85	74.47	90
330	72934	303	207	72	11.00		560	143115	1379	798	87	83.09	110
	77964	296	187	73	12.22	15		152985	1385	721	88	92.31	
	59505	530	429	69	11.84			100978	1525	1236	87	57.87	75
	65768	543	420	70	13.44			111607	1562	1208	88	65.69	
	72032	547	400	71	15.10	18.5		122236	1577	1153	90	73.81	90
	78296	550	376	73	16.95			132866	1584	1083	92	82.82	110
390	84559	553	350	75	19.03	22	600	143495	1593	1008	94	93.01	
	90823	555	321	77	21.24			154124	1599	925	95	103.78	132
	97087	558	290	78	23.59	30		164753	1607	836	97	115.30	
	70324	740	600	72	19.55	22		108191	1751	1419	82	71.18	90
	77726	758	586	73	22.19			119579	1793	1387	83	80.80	
	85129	765	559	74	24.93	30		130968	1810	1323	84	90.79	110
390	92531	768	525	76	27.97		600	142356	1819	1244	86	101.86	
	99934	773	489	78	31.42	37		153745	1829	1158	88	114.39	132
	107336	776	449	80	35.06			165133	1836	1062	90	127.65	
	114739	780	406	81	38.94	45		176522	1845	960	91	141.81	160

外形尺寸 DIMENSION


电机侧置左 垂直顶进水平顶出 (MSL VTHT)

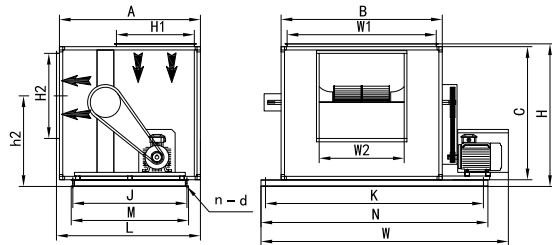

Unit : mm

型号	L	W	H	A	B	C	W1	H1	W2	H2	h2	M	N	J	K	n	d
RFF-250B/F	635	1220	754	590	662	659	510	438	322	322	445	327	1082	290	982	4	Φ17
RFF-280B/F	705	1352	809	660	740	714	588	508	361	361	480	397	1250	360	1150	4	Φ17
RFF-315B/F	775	1415	875	730	780	780	738	578	404	404	524	467	1290	430	1190	4	Φ17
RFF-355B/F	845	1620	942	800	890	847	648	738	453	453	567	537	1400	500	1300	4	Φ17
RFF-400B/F	945	1732	1021	900	1000	926	848	748	507	507	618	637	1500	600	1400	4	Φ17
RFF-450B/F	1045	1852	1120	1000	1120	1025	968	848	569	569	686	737	1700	700	1600	4	Φ17
RFF-500B/F	1145	2045	1221	1100	1190	1113	1008	918	638	638	754	840	1840	800	1740	4	Φ17
RFF-560B/F	1245	2343	1314	1200	1450	1206	1268	1018	715	715	814	940	2128	900	2028	4	Φ17
RFF-630B/F	1405	2529	1465	1360	1530	1340	1348	1178	801	801	919	1103	2231	1060	2131	4	Φ19
RFF-710B/F	1565	2686	1607	1520	1730	1482	1548	1338	898	898	1016	1163	2447	1120	2347	4	Φ19
RFF-800B/F	1755	2886	1775	1710	1840	1650	1658	978	1007	1007	1123	1353	2609	1310	2509	4	Φ19
RFF-900B/F	1955	3147	1970	1910	2000	1825	1818	1128	1130	1130	1261	1558	2910	1510	2810	4	Φ19
RFF-1000B/F	2145	3281	2127	2100	2130	1982	1948	1233	1267	1267	1349	1748	3010	1700	2910	4	Φ19

电机侧置左 水平进风垂直顶出 (MSL H0VT)

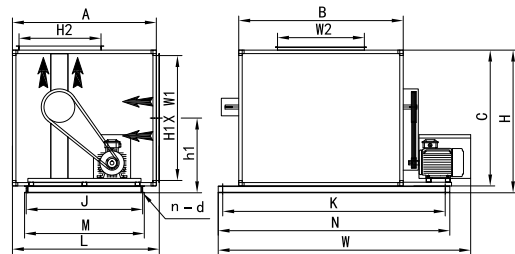


Unit : mm

型号	L	W	H	A	B	C	W1	H1	h1	W2	H2	M	N	J	K	n	d
RFF-250B/F	635	1220	645	590	662	550	510	398	325	322	322	327	1082	290	982	4	Φ17
RFF-280B/F	705	1352	648	660	740	598	588	446	349	361	361	397	1250	360	1150	4	Φ17
RFF-315B/F	775	1415	702	730	780	652	628	500	376	404	404	467	1290	430	1190	4	Φ17
RFF-355B/F	845	1620	760	800	890	710	738	558	405	453	453	537	1400	500	1300	4	Φ17
RFF-400B/F	945	1732	830	900	1000	780	848	628	440	507	507	637	1500	600	1400	4	Φ17
RFF-450B/F	1045	1852	913	1000	1120	863	968	711	482	569	569	737	1700	700	1600	4	Φ17
RFF-500B/F	1145	2045	997	1100	1190	934	1008	752	530	638	638	840	1840	800	1740	4	Φ17
RFF-560B/F	1245	2343	1077	1200	1450	1014	1268	832	570	715	715	940	2128	900	2028	4	Φ17
RFF-630B/F	1405	2529	1202	1360	1530	1122	1348	940	641	801	801	1103	2231	1060	2131	4	Φ19
RFF-710B/F	1565	2686	1326	1520	1730	1246	1548	1064	703	898	898	1163	2447	1120	2347	4	Φ19
RFF-800B/F	1755	2886	1456	1710	1840	1376	1358	1194	768	1007	1007	1353	2609	1310	2509	4	Φ19
RFF-900B/F	1955	3147	1630	1910	2000	1530	1518	1348	865	1130	1130	1558	2910	1510	2810	4	Φ19
RFF-1000B/F	2145	3281	1762	2100	2130	1662	1648	1480	931	1267	1267	1748	3010	1700	2910	4	Φ19




电机侧置左 水平进风水平顶出 （MSL H0HT）

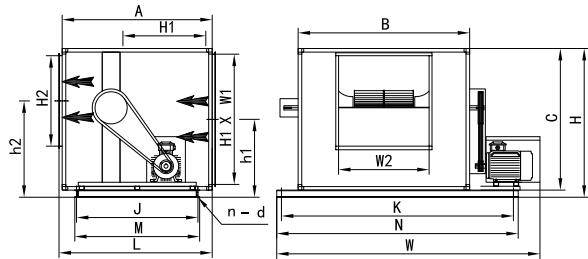

Unit : mm

型号	L	W	H	A	B	C	W1	H1	h1	W2	H2	h2	M	N	J	K	n	d
RFF-250B/F	680	1220	709	590	662	659	510	507	380	322	322	445	327	1082	290	982	4	Φ17
RFF-280B/F	750	1352	764	660	740	714	588	562	407	361	361	480	397	1250	360	1150	4	Φ17
RFF-315B/F	820	1415	830	730	780	780	628	628	440	404	404	524	467	1290	430	1190	4	Φ17
RFF-355B/F	890	1620	897	800	890	847	738	695	474	453	453	567	537	1400	500	1300	4	Φ17
RFF-400B/F	990	1732	976	900	1000	926	848	774	513	507	507	618	637	1500	600	1400	4	Φ17
RFF-450B/F	1090	1852	1075	1000	1120	1025	968	873	563	569	569	686	737	1700	700	1600	4	Φ17
RFF-500B/F	1190	2045	1176	1100	1190	1113	1008	931	620	638	638	754	840	1840	800	1740	4	Φ17
RFF-560B/F	1290	2343	1269	1200	1450	1206	1268	1024	666	715	715	814	940	2128	900	2028	4	Φ17
RFF-630B/F	1450	2529	1420	1360	1530	1340	1348	1158	750	801	801	919	1103	2231	1060	2131	4	Φ19
RFF-710B/F	1610	2686	1562	1520	1730	1482	1548	1300	821	898	898	1016	1163	2447	1120	2347	4	Φ19
RFF-800B/F	1800	2886	1730	1710	1840	1650	1358	1468	905	1007	1007	1123	1353	2609	1310	2509	4	Φ19
RFF-900B/F	2000	3147	1925	1910	2000	1825	1518	1343	1013	1130	1130	1261	1558	2910	1510	2810	4	Φ19
RFF-1000B/F	2190	3281	2082	2100	2130	1982	1648	1500	1091	1267	1267	1349	1748	3010	1700	2910	4	Φ19


电机内置左 垂直顶进水平顶出 （MIL VTHT）

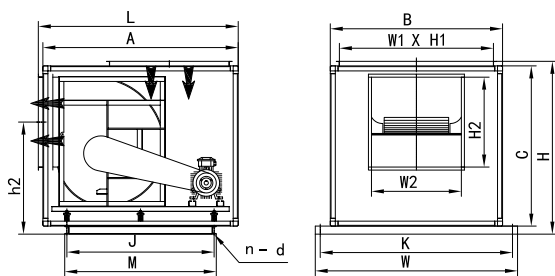

Unit : mm

型号	L	W	H	A	B	C	W1	H1	h1	W2	H2	h2	J	K	M	n	d
RFF-225B/F-B	1045	896	707	1000	730	612	580	850	500	288	288	402	620	796	675	4	Φ17
RFF-250B/F-B	1045	1030	754	1000	730	659	578	848	500	322	322	446	620	930	675	4	Φ17
RFF-280B/F-B	1165	1020	806	1120	820	714	668	968	560	361	361	480	740	920	795	4	Φ17
RFF-315B/F-B	1245	1080	874	1200	880	779	728	1048	600	404	404	522	820	980	875	4	Φ17
RFF-355B/F-B	1345	1140	942	1300	940	847	788	1148	650	453	453	567	920	1040	975	4	Φ17
RFF-400B/F-B	1445	1200	1021	1400	1000	926	848	1248	700	507	507	618	1020	1100	1057	4	Φ17
RFF-450B/F-B	1545	1320	1120	1500	1120	1025	968	1348	750	569	569	687	1120	1220	1157	4	Φ17
RFF-500B/F-B	1645	1440	1221	1600	1240	1113	1058	931	1044	638	638	754	1220	1340	1260	4	Φ17
RFF-560B/F-B	1745	1580	1331	1700	1380	1206	1198	968	1125	715	715	815	1220	1480	1260	4	Φ17
RFF-630B/F-B	1845	1720	1465	1800	1520	1340	1338	1094	1163	801	801	919	1320	1620	1363	4	Φ19
RFF-710B/F-B	1995	1920	1607	1950	1720	1482	1540	1170	1275	898	898	1014	1470	1820	1513	4	Φ19
RFF-800B/F-B	2145	2120	1775	2100	1920	1650	1738	1393	1328	1007	1007	1128	1620	2020	1663	4	Φ19
RFF-900B/F-B	2345	2350	1970	2300	2150	1825	1968	1543	1438	1130	1130	1262	1820	2250	1868	4	Φ19
RFF-1000B/F-B	2445	2600	2127	2400	2400	1982	2218	1618	1500	1267	1267	1349	1920	2500	1968	4	Φ19


电机顶置左 水平进风水平顶出 （MTL H0HT）

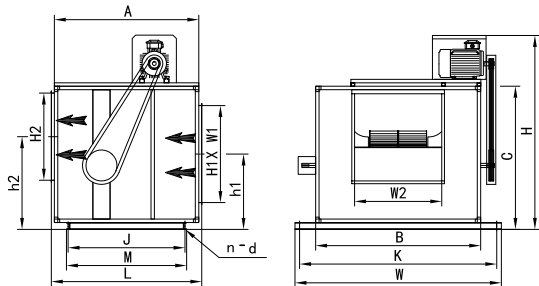

Unit : mm

型号	L	W	H	A	B	C	W1	H1	h1	W2	H2	h2	M	N	J	K	n	d
RFF-250B/F	680	862	1121	590	662	659	510	507	380	322	322	445	327	862	290	762	4	Φ17
RFF-280B/F	750	940	1205	660	740	714	588	562	407	361	361	480	397	940	360	840	4	Φ17
RFF-315B/F	820	980	1280	730	780	780	628	628	440	404	404	524	467	980	430	880	4	Φ17
RFF-355B/F	890	1097	1382	800	890	847	738	695	474	453	453	567	537	1090	500	990	4	Φ17
RFF-400B/F	990	1209	1460	900	1000	926	848	774	513	507	507	618	637	1200	600	1100	4	Φ17
RFF-450B/F	1090	1329	1559	1000	1120	1025	968	873	563	569	569	686	737	1320	700	1220	4	Φ17
RFF-500B/F	1190	1399	1762	1100	1190	1113	1008	931	620	638	638	754	840	1390	800	1290	4	Φ17
RFF-560B/F	1290	1698	1858	1200	1450	1206	1268	1024	666	715	715	814	940	1650	900	1550	4	Φ17
RFF-630B/F	1450	1775	2113	1360	1530	1340	1348	1158	750	801	801	919	1103	1730	1060	1630	4	Φ19
RFF-710B/F	1610	1999	2187	1520	1730	1482	1548	1300	821	898	898	1014	1163	1930	1120	1830	4	Φ19
RFF-800B/F	1800	2099	2479	1710	1840	1650	1358	1468	905	1007	1007	1123	1353	2040	1310	1940	4	Φ19
RFF-900B/F	2000	2400	2674	1910	2000	1825	1518	1343	1013	1130	1130	1261	1558	2400	1510	2300	4	Φ19
RFF-1000B/F	2190	2530	2831	2100	2130	1982	1648	1500	1091	1267	1267	1349	1748	2530	1700	2430	4	Φ19

电机内置左 水平进风垂直顶出 （MIL H0VT）

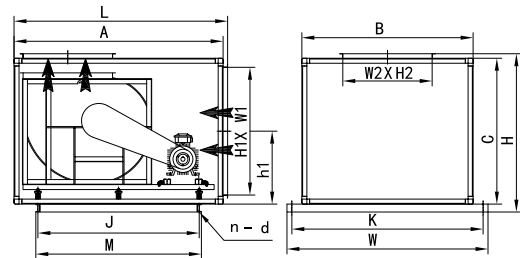


Unit : mm

型号	L	W	H	A	B	C	W1	H1	h1	W2	H2	h2	J	K	M	n	d
RFF-225B/F-B	1045	896	609	1000	730	514	580	364	307	288	288	220	620	796	675	4	Φ17
RFF-250B/F-B	1045	930	646	1000	730	551	578	400	312	322	322	237	620	830	675	4	Φ17
RFF-280B/F-B	1165	1020	695	1120	820	600	668	448	350	361	361	258	740	920	795	4	Φ17
RFF-315B/F-B	1245	1080	747	1200	880	652	728	500	376	404	404	291	820	980	875	4	Φ17
RFF-355B/F-B	1345	1140	805	1300	940	710	788	558	405	453	453	302	920	1040	975	4	Φ17
RFF-400B/F-B	1445	1200	875	1400	1000	780	848	628	440	507	507	329	1020	1100	1057	4	Φ17
RFF-450B/F-B	1545	1320	958	1500	1120	863	968	711	482	569	569	390	1120	1220	1157	4	Φ17
RFF-500B/F-B	1645	1440	1042	1600	1240	934	1058	752	530	638	638	422	1220	1340	1260	4	Φ17
RFF-560B/F-B	1745	1580	1139	1700	1380	1014	1198	832	587	715	715	455	1220	1480	1260	4	Φ17
RFF-630B/F-B	1945	1720	1247	1900	1520	1122	1340	942	641	801	801	502	1420	1620	1463	4	Φ19
RFF-710B/F-B	2145	1920	1371	2100	1720	1246	1538	1064	688	898	898	549	1620	1820	1663	4	Φ19
RFF-800B/F-B	2345	2120	1504	2300	1920	1379	1738	1197	755	1007	1007	605	1820	2020	1863	4	Φ19
RFF-900B/F-B	2545	2350	1676	2500	2150	1531	1570	1349	851	1130	1130	665	2020	2250	2068	4	Φ19
RFF-1000B/F-B	2645	2600	1808	2600	2400	1663	1618	1481	932	1267	1267	733	2120	2500	2168	4	Φ19



电机内置左 水平进风水平顶出 （MIL H0HT）

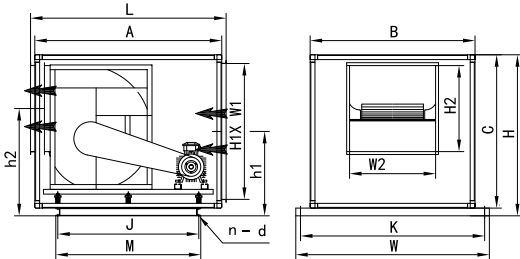

Unit : mm

型号	L	W	H	A	B	C	W1	H1	h1	W2	H2	h2	J	K	M	n	d
RFF-225B/F-B	1090	896	662	1000	730	612	578	462	356	288	288	402	620	796	675	4	Φ17
RFF-250B/F-B	1090	930	709	1000	730	659	578	507	366	322	322	446	620	830	675	4	Φ17
RFF-280B/F-B	1210	1020	764	1120	820	714	668	562	407	361	361	480	740	920	795	4	Φ17
RFF-315B/F-B	1290	1080	829	1200	880	779	728	627	440	404	404	522	820	980	875	4	Φ17
RFF-355B/F-B	1390	1140	897	1300	940	847	788	695	474	453	453	567	920	1040	975	4	Φ17
RFF-400B/F-B	1490	1200	976	1400	1000	926	848	774	513	507	507	618	1020	1100	1057	4	Φ17
RFF-450B/F-B	1590	1320	1075	1500	1120	1025	968	873	563	569	569	687	1120	1220	1157	4	Φ17
RFF-500B/F-B	1690	1440	1176	1600	1240	1113	1058	931	620	638	638	754	1220	1340	1260	4	Φ17
RFF-560B/F-B	1790	1580	1269	1700	1380	1206	1198	1024	666	715	715	815	1220	1480	1260	4	Φ17
RFF-630B/F-B	1890	1720	1420	1800	1520	1340	1338	1158	750	801	801	919	1320	1620	1363	4	Φ19
RFF-710B/F-B	2040	1920	1562	1950	1720	1482	1538	1300	821	898	898	1014	1470	1820	1513	4	Φ19
RFF-800B/F-B	2190	2120	1730	2100	1920	1650	1438	1468	905	1007	1007	1128	1620	2020	1663	4	Φ19
RFF-900B/F-B	2390	2350	1925	2300	2150	1825	1568	1443	1013	1130	1130	1262	1820	2250	1868	4	Φ19
RFF-1000B/F-B	2490	2600	2082	2400	2400	1982	1618	1500	1091	1267	1267	1349	1920	2500	1968	4	Φ19

电机功率及重量

POWER&WEIGHT OF MOTOR

定转矩双速电机

框号	2/4极		4/6极		4/8极		6/8极	
	功率KW	重量	功率KW	重量	功率KW	重量	功率KW	重量
80M	0.45/0.55	17	0.15/0.22	17				
80M	0.55/0.75	18	0.22/0.35	18	0.27/0.4	18		
90S	0.85/1.1	22	0.65/0.85	25	0.37/0.65	22	0.35/0.45	21
90L	1.3/1.8	25	0.85/1.1	28	0.45/0.75	24	0.45/0.65	24
100L	2/2.4	34	1.3/1.8	35	0.85/1.5	35	0.75/1.1	35
	2.4/3	36	1.5/2.2	36				
	3.3/4	45	2.2/2.8	44	1.5/2.4	43	1.3/1.8	43
112M	3.3/4	45	2.2/2.8	44	1.5/2.4	43	1.3/1.8	43
132S	4.5/5.5	65	43/63	60	2.2/3.3	59	1.8/2.4	59
132M	6.5/8	71	4.0/5.5	80	3/4.5	65	2.6/3.7	65
160M	9/11	125	6.5/8	124	5/7.5	123	4.5/6	122
160L	11/14	137	9/11	145	7/11	144	6/8	143
180M	15/18.5	179	11/14	170			7.5/10	182
180L	18.5/22	191	13/16	185	11/17	216	9/12	201
200L	26/30	300	18.5/22	200	14/22	240	12/17	238
					17/26	260	15/20	260
225S	32/37	314	22/28	295				
225M	37/45	341	26/32	315	24/34	340	24/30	300
250M	45/52	456	32/42	389	30/42	455		
280S	60/72	540	42/55	490	40/55	540		
280M	72/82	598	55/67	540	47/67	598		

注：电机重量仅作参考，单位为Kg。

递减转矩双速电机

2/4极			4/6极			4/8极			6/8极		
框号	功率KW	重量	框号	功率KW	重量	框号	功率KW	重量	框号	功率KW	重量
80M	0.75/0.17	20	80M	0.37/0.11	20	80M	0.55/0.13	20	80M	0.25/0.1	20
90S	0.95/0.25	25	80M	0.55/0.15	20	90S	0.75/0.17	25	80M	0.37/0.11	20
90L	1.5/0.33	28	90S	0.75/0.22	25	90L	1/0.22	28	90S	0.55/0.15	25
100L	1.9/0.4	35	90L	1/0.3	28	100L	1.3/0.3	35	90L	0.75/0.2	28
112M	3/0.6	45	100L	1.3/0.5	35	100L	2/0.55	35	100L	1.1/0.37	35
112M	3.5/0.7	45	100L	2/0.6	35	100L	2.4/0.65	35	112M	1.5/0.55	45
132S	4.4/1.1	60	112M	3/0.8	45	112M	3.2/0.9	45	132M	3/1.1	80
132S	6.2/1.3	60	132M	4.7/1.5	80	132S	4.5/1.1	60	132M	4/1.5	80
160M	8.3/1.7	125	132M	5.62/2.47	80	132M	6.3/1.5	80	160M	6.5/3.2	125
160M	12.5/2.8	125	132M	6.7/2.2	80	160M	8.9/2	125	160L	7.5/3	145
160L	16/3.2	145	160M	7.5/3.3	125	160L	12/2.7	145	180M	9/4.5	182
180M	19.5/4.5	182	160L	9.5/3.1	145	180M	16/4	182	180L	11/3	216
200L	21.5/4.7	260	160L	12/4	145	180L	19.5/5	216	200L	15/3.7	260
200L	26/5.2	260	180L	15.5/5.1	216	225S	29/7.5	300	200L	18.5/5.5	260
200L	32/8	260	200L	18/6.2	260	225M	40/9.5	340	225M	22/7.5	340
225M	39/10	340	200L	24/8.5	260	250M	52/14.5	380	250M	25/9	380
225M	42/11	340	225M	30/10	340	280S	65/17	540	250M	27/10	380
250M	45/13	380	250M	37/12	380				280S	30/15	540
280S	55/15	540	280S	45/15	540				280M	37/15	598
280M	75/25	598	280S	55/18.5	540				315S	40/15	1020
			280M	70/25	598				315S	45/18.5	1020

注：电机重量仅作参考，单位为Kg。

风机重量(不含电机)对照表

Model	Kg	Model	Kg	Model	Kg	Model	Kg
RFF-280F-B	87	RFF-280B-B	90	RFF-280F	70	RFF-280B	73
RFF-315F-B	104	RFF-315B-B	112	RFF-315F	100	RFF-315B	107
RFF-355F-B	115	RFF-355B-B	127	RFF-355F	115	RFF-355B	128
RFF-400F-B	143	RFF-400B-B	152	RFF-400F	143	RFF-400B	150
RFF-450F-B	176	RFF-450B-B	187	RFF-450F	175	RFF-450B	185
RFF-500F-B	234	RFF-500B-B	246	RFF-500F	227	RFF-500B	239
RFF-560F-B	354	RFF-560B-B	365	RFF-560F	321	RFF-560B	332
RFF-630F-B	417	RFF-630B-B	429	RFF-630F	410	RFF-630B	422
RFF-710F-B	508	RFF-710B-B	539	RFF-710F	510	RFF-710B	541
RFF-800F-B	630	RFF-800B-B	640	RFF-800F	610	RFF-800B	620
RFF-900F-B	823	RFF-900B-B	939	RFF-900F	802	RFF-900B	919
RFF-1000F-B	1070	RFF-1000B-B	1120	RFF-1000F	968	RFF-1000B	1018

电机重量表

单位：Kg

功率 KW	普通电机				防爆电机			
	2 Pole	4 Pole	6 Pole	8 Pole	2 Pole	4 Pole	6 Pole	8 Pole
0.18	7	9	10	16	14	16	17	20
0.25	8	11	11	17	15	17	18	22
0.37	10	12	13	21	16	18	20	28
0.55	11	14	16	24	17	24	25	30
0.75	13	15.5	20	31	24	27	39	40
1.1	15	20	24	42	25	34	41	46
1.5	19	23	31	56	35	38	45	57
2.2	23	30	41	72	38	46	57	83
3	30	33	54	80	44	51	84	95
4	37	42	65	105	46	68	92	158
5.5	54	58	73	113	81	85	104	180
7.5	59	72	103	127	89	105	171	180
11	93	99	128	163	142	150	180	228
15	103	120	163	233	152	171	230	335
18.5	118	163	210	246	169	211	309	371
22	151	182	228	286	227	224	320	398
30	215	227	282	355	265	290	364	522
37	240	262	357	427	275	346	535	626
45	277	284	437	485	340	358	643	722
55	334	355	485	665	477	492	735	955
75	470	510	690	845	655	670	1095	1160
90	520	555	830	890	733	743	1153	1238
110	750	750	965	1040	1140	986	1330	1362
132	905	880	1010	1530	1170	1070	1485	1620
160	945	965	1610	1650	1385	1350	1610	1710

技术规范

TECHNICAL SPECIFICATION

风机类型 /Fan type

该风机采用双宽双进风(DWDI)机芯，其设计制造符合JB/T 10563-2006《一般用途离心通风机技术条件》；防爆型还要符合GB26410-2011《防爆通风机》，GB/T3836.1-2021《爆炸性环境第1部分:设备通用要求》，GB/T 3836.2-2021《爆炸性环境 第2部分:由隔爆外壳“d”保护的装置》等关于防爆的要求；消防排烟风机应符合《CCCF-CPRZ-19:2019消防类产品认证实施规则·火灾防护产品·消防排烟排烟设备产品》的要求，并按《XF211-2009消防排烟风机耐高温试验方法》进行检验，并取得认证证书。

Smoke exhaust fans shall meet the requirements of CCCF-CPRZ-19: 2019 Implementation Rules for Certification of Fire Protection Products, and shall be inspected in accordance with XF211-2009 Test Method for High Temperature Resistance of Fire Protection Smoke Exhaust Fans, and obtain the certification certificate.

叶轮 /Wheel

叶轮为钢制前弯、后倾或机翼型叶片，叶轮强度设计应满足最高工作转速的150%。叶轮整体经过静态和动态平衡，叶轮平衡等级应达到G2.5（ISO1940）等级。

The wheel shall made by steel, and the blade can be forward curved、backward curved、airfoil, and the strength designed for 150% of the work speed. The wheel shall be balanced statically and dynamically to the level of G2.5 with AMCA standard.

箱体 /Cabinet

风机箱体应采用高强度铝合金框架，并采取防腐蚀处理。面板采用镀锌钢或者碳钢喷涂处理，面板与框架保持平整且间隙均匀。箱体应配置检修门，并经螺栓压紧，保证气密性。

The case shall be made by the aluminum frame. The panel shall be made by galvanized steel or carbon steel, the panel and the frame remain flat and evenly spaced.The cabinet should be equipped with access door, and be pressed by bolts to ensure air tightness.

底座 /Base

离心风机箱应自带整体式底座，底座为型钢制成并预留安装孔。

There is an integral base made of shaped steel and the mounting holes were reserved.

传动方式 /Drive type

皮带传动，传动系统应按传动功率的150%选用V形皮带，皮带线速度不超过25m/s，皮带与皮带轮应可靠匹配，可在40℃下长久工作。皮带轮应选用铸铁材质，锥套锁紧结构，皮带轮品牌为威欧特。

The type of driving is belt, and the drive system shall be selected as 150% of the shaft power, also the linear velocity is less than 25m/s. The brand of belt can be long used under 40℃ . the belt pulley should be made of cast iron, cone sleeve locking structure, the brand is WOT.

轴 /Shaft

风机轴采用45#钢经粗加工、调质处理及磨削加工制成，严格控制轴径尺寸公差及形位公差，每根轴均经过涂覆防锈处理。其机械加工精度应符合ISO 286-2 的g6级标准。

轴应进行二次校核，其临界转速应为最高工作转速的1.35倍以上。

The shaft is made of 45# steel after rough machining, quenching and tempering and grinding, the tolerance of shaft is controlled strictly and every shaft shall be coated with anti-rust treatment. Its machining accuracy shall meet ISO 286-2 g6 standard.

The shaft should be checked twice, and its critical speed should be more than 1.35 times of the maximum working speed.

轴承 /Bearings

轴承应选用基于AFBMA规定的L10：100000小时重载荷自调心轴承，采用锥套锁紧方式，轴承品牌要求为FYH、SKF或NSK等同档次品牌。

The bearing should adopt L10:100000 hour heavy load self-aligning bearing based on AFBMA regulation and adopt cone sleeve locking mode. The bearing brand should be FYH, SKF or NSK equivalent grade brand.

效率 /Efficiency

按照GB/T 19761-2020《通风机能效限定值及能效等级》评定标准，达到二级能效等级。

According to GB/T 19761-2020, reach the second level of energy efficiency grade.

电机 /Motor

电机应采用优质品牌，电机防护等级不低于IP54，绝缘等级不低于F级。

The motor shall be of high quality brand, the protection grade of the motor shall not be lower than IP54, and the insulation grade shall not be lower than F.